


OIL ANALYSIS REPORT



Circulating Hydraulic System

CONOCO MEGAFLOW AW 32 (--- GAL)

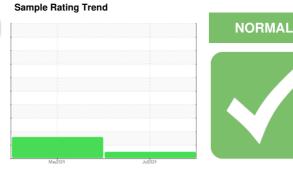

Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			May2024	Jul2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KOH0000055	KOH0000018	
Sample Date		Client Info		11 Jul 2024	06 May 2024	
Machine Age	hrs	Client Info		582	0	
Oil Age	hrs	Client Info		582	3	
Oil Changed		Client Info		Not Changd	Not Changd	
Sample Status				NORMAL	ATTENTION	
CONTAMINATION	1	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1	0	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>10	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m		0	0	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>75	1	3	
Tin	ppm	ASTM D5185m	>10	0	<1	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m	0	0	0	
Magnesium Calcium	ppm	ASTM D5185m	0	53	59	
Phosphorus	ppm	ASTM D5185m	365	349	348	
Zinc	ppm	ASTM D5185m	500	441	459	
Sulfur	ppm	ASTM D5185m	1000	1031	1031	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm		>20	<1	2	
Sodium	ppm	ASTM D5185m	>E0	1	1	
Potassium	ppm	ASTM D5185m	>20	0	0	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1149	6310	
Particles >6µm		ASTM D7647	>1300	370	2030	
Particles >14µm		ASTM D7647	>160	31	175	
Particles >21µm		ASTM D7647	>40	9	46	
Particles >38µm		ASTM D7647	>10	0	3	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/16/12	20/18/15	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
A -! -! A I	m = 1/011/=	ACTM DODAE	0.00	0.42	0.45	

KOMATSU

OIL ANALYSIS REPORT

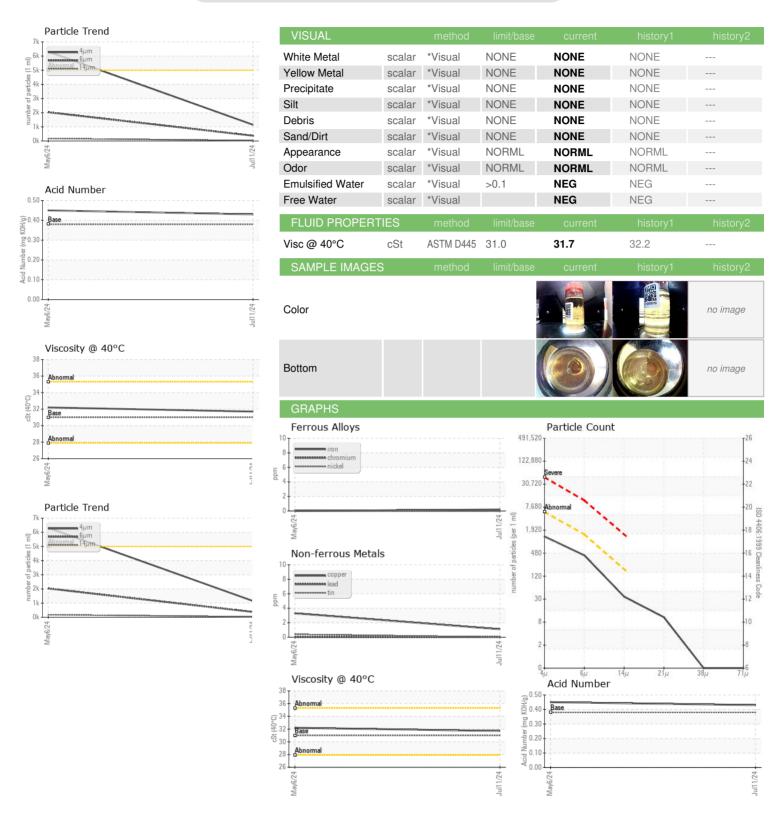





Certificate 12367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513 Sample No. Lab Number : 06239103 Unique Number : 11127937

: KOH0000055

Test Package : CONST

Received : 17 Jul 2024 **Tested** : 18 Jul 2024

Diagnosed : 18 Jul 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

KOMATSU HYDRAULICS 401 E GREENFIELD AVENUE

MILWAUKEE, WI US 53204-2941 Contact: JOHN GATES

john.gates@global.komatsu T: (414)670-5932