

## **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

Machine Id

# **ATLAS COPCO API253527 - PREFORM**

Component Compressor

Fluid **ISEL SERIES 2015-46 (--- GAL)** 

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

_						
				Jul2024		
SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		DFP0000059		
Sample Date		Client Info		11 Jul 2024		
Machine Age	hrs	Client Info		25785		
Dil Age	hrs	Client Info		0		
Dil Changed		Client Info		Not Changd		
Sample Status				ATTENTION		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG		
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>5	0		
Nickel	ppm	ASTM D5185m		0		
Fitanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>15	0		
₋ead	ppm	ASTM D5185m	>65	0		
Copper	ppm	ASTM D5185m	>65	0		
Fin	ppm	ASTM D5185m	>10	0		
/anadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		<1		
Phosphorus	ppm	ASTM D5185m		381		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m		51		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	4		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<b>e</b> 12470		
Particles >6µm		ASTM D7647	>2500	<mark> </mark> 3991		
Particles >14µm		ASTM D7647	>320	<mark>)</mark> 322		
Particles >21µm		ASTM D7647		80		
Particles >38µm		ASTM D7647	>20	2		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<b>e</b> 21/19/16		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.23		
(7.40) Devu 4	- 0			0		

Report Id: DFPSIO [WUSCAR] 06239121 (Generated: 07/19/2024 12:17:48) Rev: 1

Contact/Location: KEN HURST - DFPSIO Page 1 of 2



12

61

21

0

14 12 Î

10 of particles (1 8k

6k

0

0.2

(B/HO) ₽°0.1 Ê 0.1

10.05

0.00

54

52

50

() 48 š 46

44

42

40

har 4

=10k

r of particles 8k

her 4

# **OIL ANALYSIS REPORT**

NONE

NONE

NONE

NONE

NONE

NONE

NORML

NORML

NEG

NEG

46.7

Particle Count

Acid Number

Ī

31

Jul11/24.

: 17 Jul 2024

: 18 Jul 2024

: 19 Jul 2024 - Don Baldridge

no image

no image


no image

no imade

4406

:1999 Cle

1/24

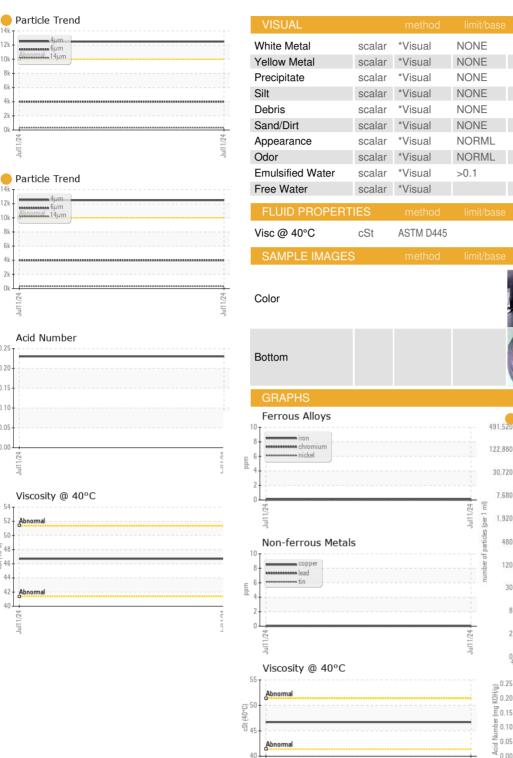


74

In

: DFP0000059

**Compressed Air Technology** 1801 E. 39th Street North Sioux Falls, US 57104 Contact: KEN HURST khurst@dfpcompressedairtechnology.com T:



Laboratory

Sample No.

Lab Number : 06239121

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Received

Diagnosed

Tested

Report Id: DFPSIO [WUSCAR] 06239121 (Generated: 07/19/2024 12:17:49) Rev: 1

Contact/Location: KEN HURST - DFPSIO

214

38L

Page 2 of 2

F: (605)332-0988