




OIL ANALYSIS REPORT

Sample Rating Trend

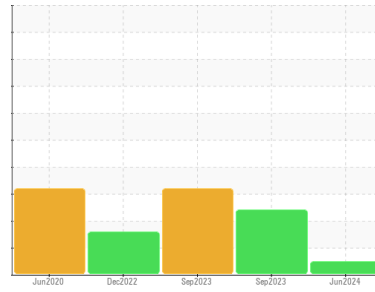

NORMAL



Machine Id
5.3.31 NORTH DYNO CELL 9
 Component
Gearbox
 Fluid
MOBIL DTE OIL HVY MEDIUM (200 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			USP0015005	USP0006184	USP0006182
Sample Date	Client Info			26 Jun 2024	13 Sep 2023	13 Sep 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	Not Changd
Sample Status				NORMAL	ATTENTION	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	9	8	<1
Chromium	ppm	ASTM D5185m	>15	0	0	0
Nickel	ppm	ASTM D5185m	>15	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	2	0
Lead	ppm	ASTM D5185m	>100	18	▲ 20	2
Copper	ppm	ASTM D5185m	>200	30	▲ 32	12
Tin	ppm	ASTM D5185m	>25	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<1	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		4	0	0
Calcium	ppm	ASTM D5185m		5	5	0
Phosphorus	ppm	ASTM D5185m		289	302	127
Zinc	ppm	ASTM D5185m		23	33	● 66
Sulfur	ppm	ASTM D5185m		11509	11496	● 721






CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	2	2	<1
Sodium	ppm	ASTM D5185m		1	<1	<1
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water	%	ASTM D6304	>0.2	0.003	0.005	0.006
ppm Water	ppm	ASTM D6304	>2000	33	60	65

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>20000	2266	● 9695	▲ 17548
Particles >6µm		ASTM D7647	>5000	309	1226	▲ 4043
Particles >14µm		ASTM D7647	>640	8	73	▲ 291
Particles >21µm		ASTM D7647	>160	2	23	▲ 72
Particles >38µm		ASTM D7647	>40	0	2	2
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	18/15/10	● 20/17/13	▲ 21/19/15

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.52	0.58	0.18




OIL ANALYSIS REPORT

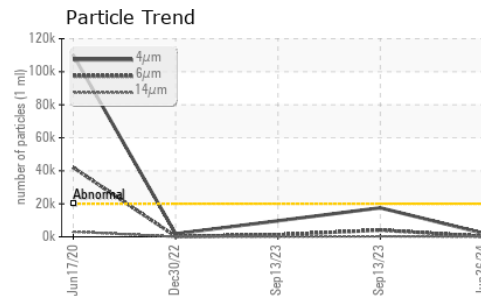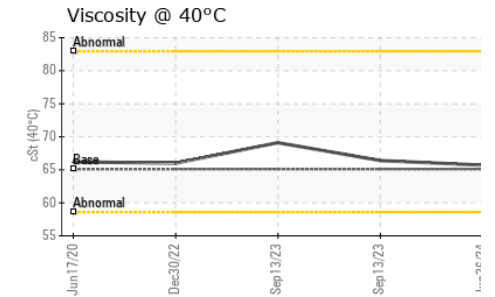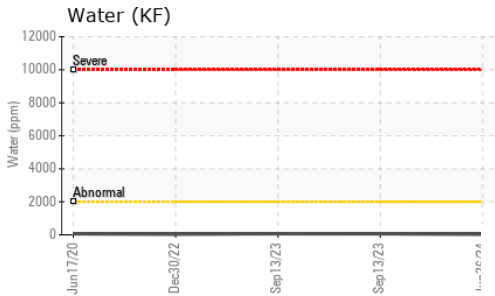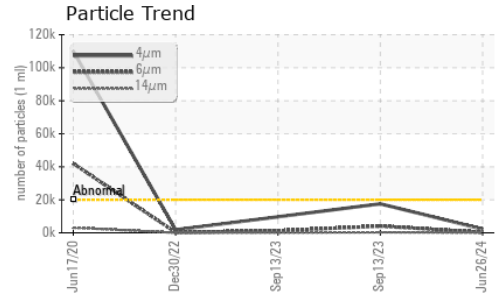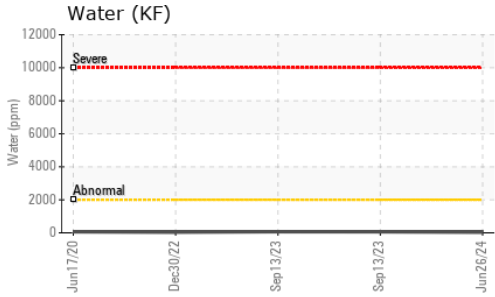







VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	65.1	65.7	66.4	69.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

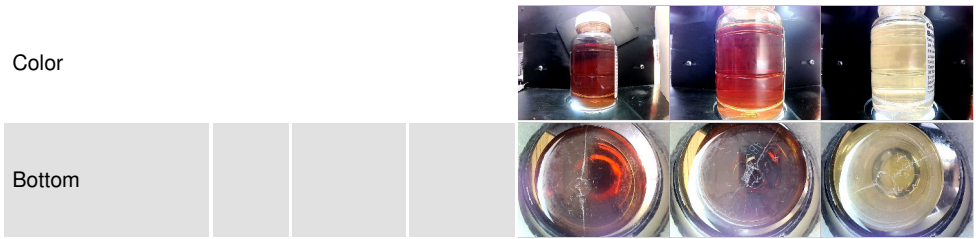

GRAPHS

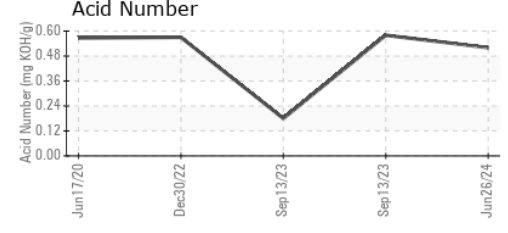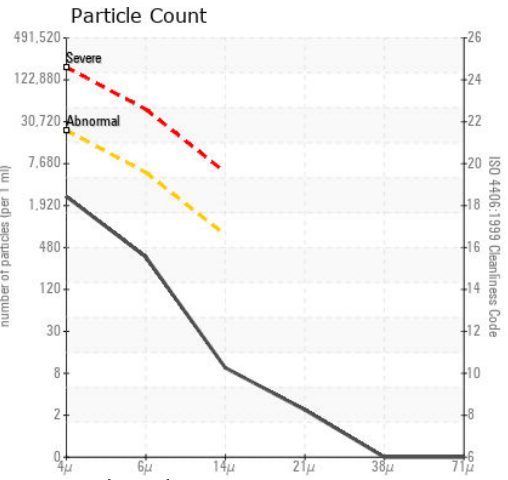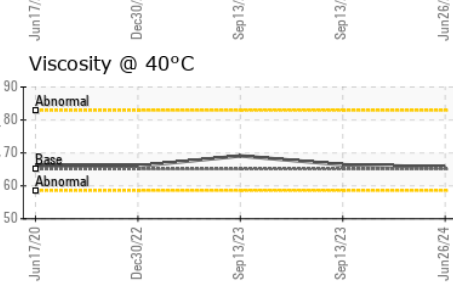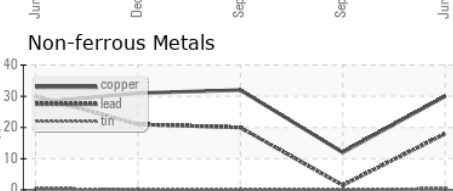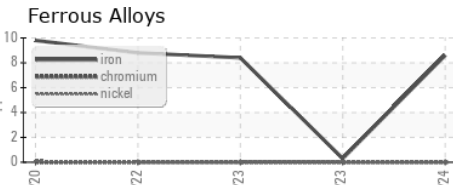

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : USP0015005 **Received** : 17 Jul 2024
Lab Number : 06239163 **Tested** : 18 Jul 2024
Unique Number : 11127997 **Diagnosed** : 18 Jul 2024 - Doug Bogart
Test Package : IND 2

US ARMY BUILDING 212 MS121
 6501 E ELVEN MILE RD
 WARREN, MI
 US 48397-5000
 Contact: BRIAN OBUCHOWSKI
 brian.obuchowski@jacobs.com
 T: (813)300-0543
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)