




# OIL ANALYSIS REPORT

Sample Rating Trend

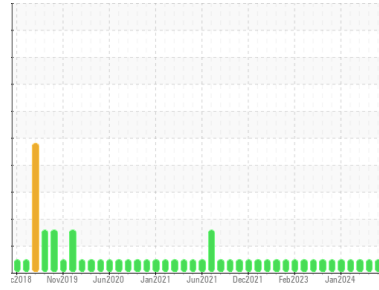

**NORMAL**



Area  
**PACKAGING CUB**  
 Machine Id  
**PVAC 1 (S/N 265349-1110)**  
 Component  
**Pump**  
 Fluid  
**{not provided} (2 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WCI2340248</b>	WCI2340170	WCI2340155
Sample Date	Client Info		<b>15 Jul 2024</b>	30 May 2024	03 Apr 2024
Machine Age	hrs	Client Info	<b>57121</b>	56570	55887
Oil Age	hrs	Client Info	<b>500</b>	683	513
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>4</b>	2	<1
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >7	<b>3</b>	0	<1
Lead	ppm	ASTM D5185m >12	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >30	<b>&lt;1</b>	0	0
Tin	ppm	ASTM D5185m >9	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	<b>&lt;1</b>	13	0
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Calcium	ppm	ASTM D5185m	<b>&lt;1</b>	10	22
Phosphorus	ppm	ASTM D5185m	<b>8</b>	4	9
Zinc	ppm	ASTM D5185m	<b>7</b>	8	4
Sulfur	ppm	ASTM D5185m	<b>7185</b>	8081	8830

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >60	<b>12</b>	5	8
Sodium	ppm	ASTM D5185m	<b>0</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>1</b>	0	0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.06</b>	0.065	0.091




# OIL ANALYSIS REPORT

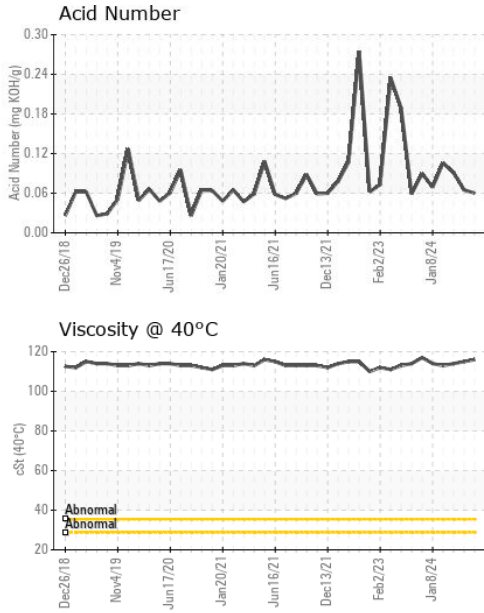





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	116	115	114

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

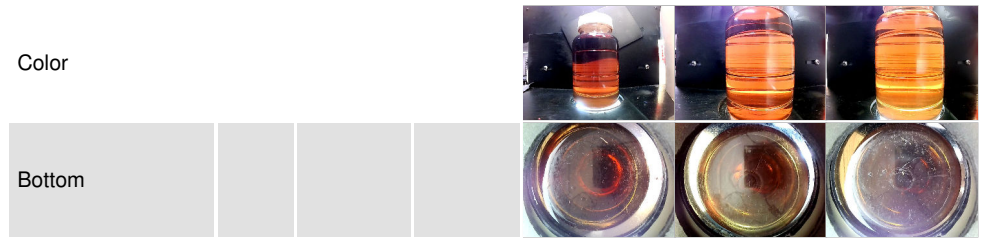

## GRAPHS

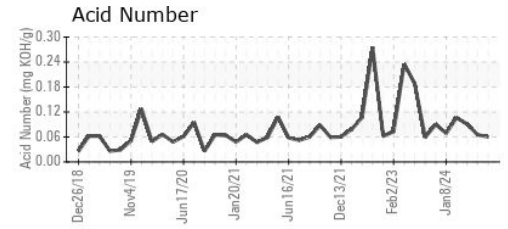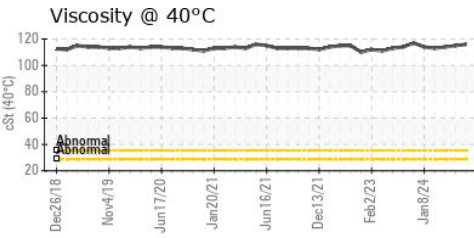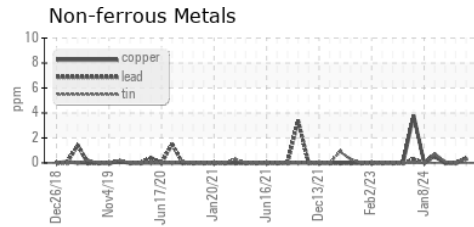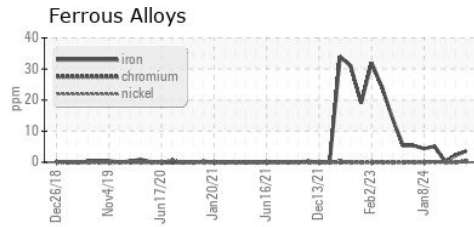

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC12340248  
**Lab Number** : 06239290  
**Unique Number** : 11128124  
**Test Package** : IND 2

**Received** : 17 Jul 2024  
**Tested** : 18 Jul 2024  
**Diagnosed** : 19 Jul 2024 - Sean Felton

**QORVO**  
 7914 PIEDMONT TRIAD PKWY  
 GREENSBORO, NC  
 US 27409  
 Contact: JIM AGNER  
 jim.agner@qorvo.com  
 T: (336)678-5038  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)