




# OIL ANALYSIS REPORT

Sample Rating Trend

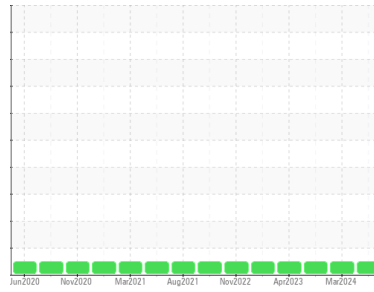

**NORMAL**



Area

**BUCKET TRUCK**

Machine Id

**FREIGHTLINER V031**

Component

**Diesel Engine**

Fluid

**HIGH PERFORMANCE LUBRICANTS HDMO 15W40 (18 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>HPL0002269</b>	HPL0002290	HPL0001786
Sample Date	Client Info	<b>12 Jul 2024</b>	11 Mar 2024	23 Jun 2023
Machine Age	hrs	<b>6560</b>	6560	6560
Oil Age	hrs	<b>258</b>	221	399
Oil Changed	Client Info	<b>Not Changed</b>	Not Changed	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	<b>12</b>	10	17
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >30	<b>7</b>	7	2
Lead	ppm ASTM D5185m >30	<b>0</b>	0	0
Copper	ppm ASTM D5185m >150	<b>2</b>	2	3
Tin	ppm ASTM D5185m >5	<b>&lt;1</b>	0	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 200	<b>4</b>	39	202
Barium	ppm ASTM D5185m	<b>3</b>	2	0
Molybdenum	ppm ASTM D5185m 85	<b>560</b>	583	715
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm ASTM D5185m 525	<b>947</b>	806	439
Calcium	ppm ASTM D5185m 4300	<b>2572</b>	2793	4038
Phosphorus	ppm ASTM D5185m 1000	<b>951</b>	1005	840
Zinc	ppm ASTM D5185m 1100	<b>1230</b>	1174	1033
Sulfur	ppm ASTM D5185m 20200	<b>7949</b>	10866	20409

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	<b>11</b>	12	11
Sodium	ppm ASTM D5185m	<b>0</b>	1	1
Potassium	ppm ASTM D5185m >20	<b>4</b>	2	2

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	0.3	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>11.5</b>	10.4	11.1
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>38.2</b>	35.9	30.0


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>39.9</b>	35.3	20.8
Base Number (BN)	mg KOH/g ASTM D2896 14.5	<b>14.96</b>	16.25	15.49




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

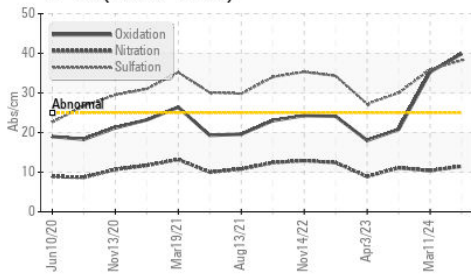

Base Number

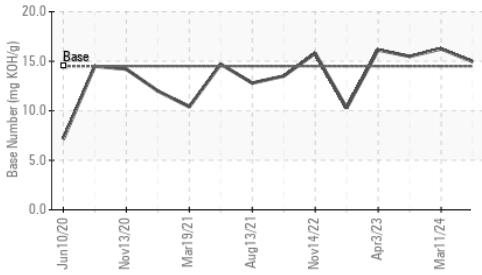









Viscosity @ 100°C

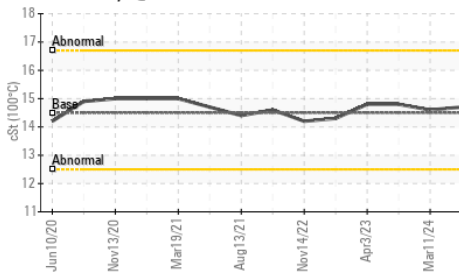

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.5	14.7	14.6

## GRAPHS

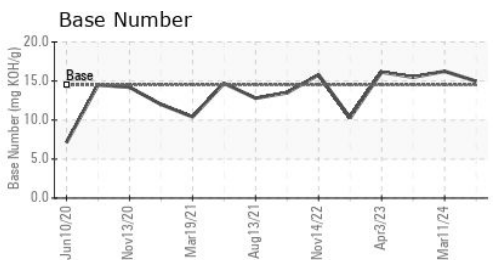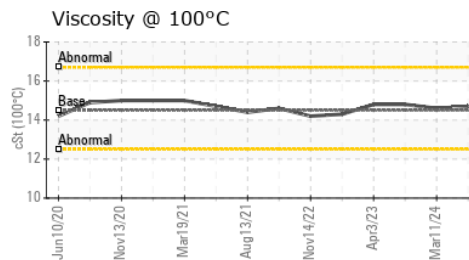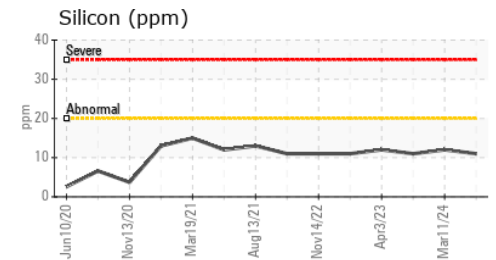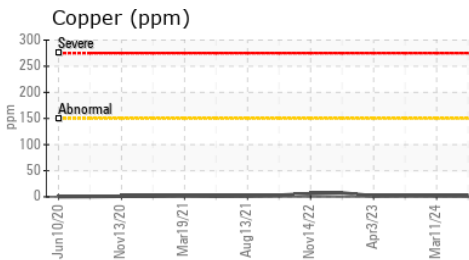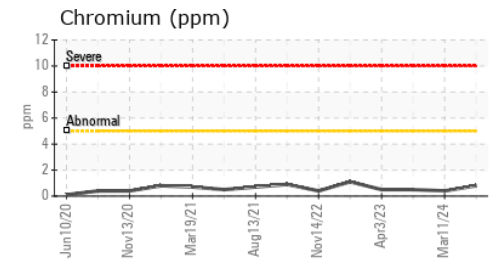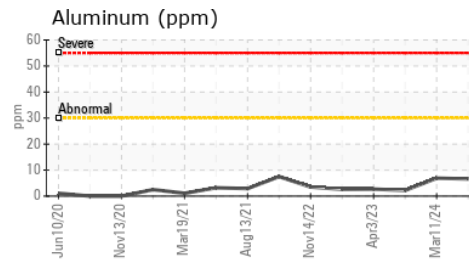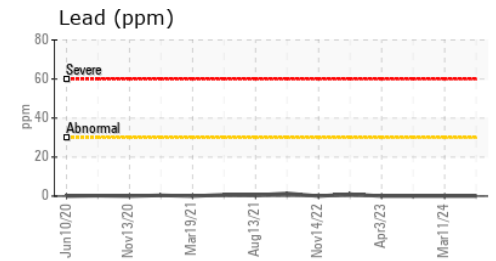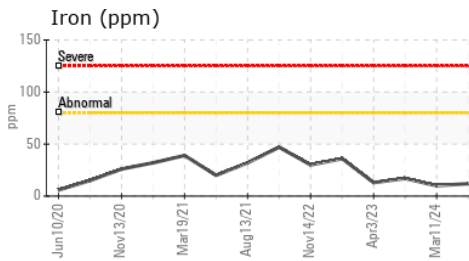

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HPL0002269  
**Lab Number** : 06239319  
**Unique Number** : 11128153  
**Test Package** : MOB 2  
**Received** : 17 Jul 2024  
**Tested** : 18 Jul 2024  
**Diagnosed** : 19 Jul 2024 - Sean Felton

**MUSCATINE POWER AND WATER**  
 3205 CEDAR STREET  
 MUSCATINE, IA  
 US 52761  
 Contact: JUSTIN CONKLIN  
 justin.conklin@mpw.org  
 T: (563)262-3351  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)