


OIL ANALYSIS REPORT

Sample Rating Trend

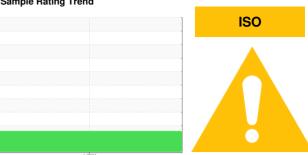

Machine Id

2301049 (S/N 2562)

Compressor

KAESER SIGMA (OEM) FG-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Jul2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA020877		
Sample Date		Client Info		08 Jul 2024		
Machine Age	hrs	Client Info		6093		
Oil Age	hrs	Client Info		300		
Oil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	23		
Chromium	ppm		>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m		8		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m		1		
Tin		ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m	>10	0		
	ppm			-		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		2		
Calcium	ppm	ASTM D5185m		0		
Phosphorus	ppm	ASTM D5185m	500	373		
Zinc	ppm	ASTM D5185m		220		
Sulfur	ppm	ASTM D5185m		1977		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.05	0.006		
ppm Water	ppm	ASTM D6304	>500	61		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		8506		
Particles >6µm		ASTM D7647	>1300	△ 2358		
Particles >14µm		ASTM D7647	>80	<u>^</u> 264		
Particles >21µm		ASTM D7647	>20	<u>^</u> 67		
Particles >38µm		ASTM D7647	>4	4		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 20/18/15		
	TION	. ,				
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.5	0.83		

Contact/Location: TRENA ? - WATWATCAL



OIL ANALYSIS REPORT

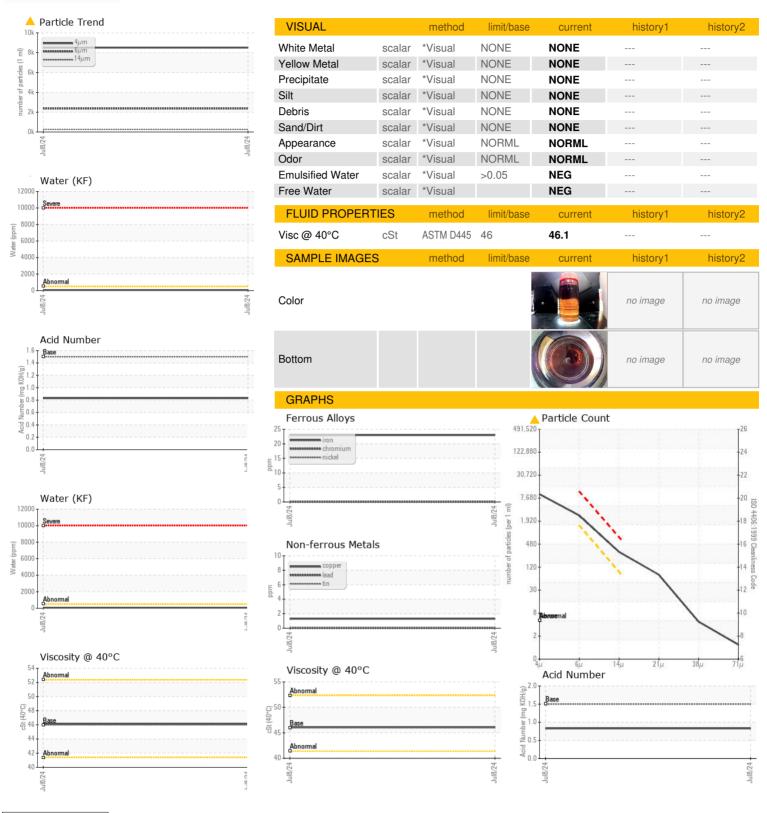





Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Lab Number

: KCPA020877 : 06239591 Unique Number : 11128425

Received Tested Diagnosed

: 19 Jul 2024 - Don Baldridge Test Package : IND 2 (Additional Tests: KF, PrtCount)

: 17 Jul 2024

: 18 Jul 2024

To discuss this sample report, contact Customer Service at 1-800-237-1369. st - Denotes test methods that are outside of the ISO 17025 scope of accreditation. WATERFORD ALMOND HULLER

12013 EL POMAR AVE WATERFORD, CA US 95386

Contact: TRENA trena@riddleranchesinc.com

T: Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: