




# OIL ANALYSIS REPORT

## Sample Rating Trend

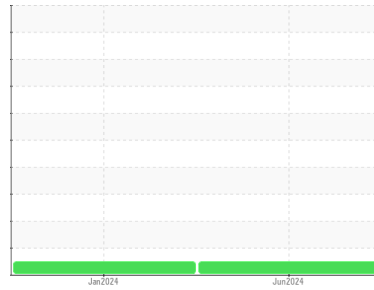

**NORMAL**



Machine Id  
**FREIGHTLINER 3059 - TW**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2 |
|--------------------|-------------|-------------|------------|--------------------|-------------|----------|
| Sample Number      | Client Info |             |            | <b>SBP0004298</b>  | SBP0004295  | ---      |
| Sample Date        | Client Info |             |            | <b>17 Jun 2024</b> | 22 Jan 2024 | ---      |
| Machine Age        | mls         | Client Info |            | <b>161072</b>      | 154003      | ---      |
| Oil Age            | mls         | Client Info |            | <b>7069</b>        | 6812        | ---      |
| Oil Changed        | Client Info |             |            | <b>Changed</b>     | Changed     | ---      |
| Sample Status      |             |             |            | <b>NORMAL</b>      | NORMAL      | ---      |

| CONTAMINATION |           | method | limit/base | current        | history1 | history2 |
|---------------|-----------|--------|------------|----------------|----------|----------|
| Fuel          | WC Method | >5     |            | <b>&lt;1.0</b> | <1.0     | ---      |
| Water         | WC Method | >0.2   |            | <b>NEG</b>     | NEG      | ---      |
| Glycol        | WC Method |        |            | <b>NEG</b>     | NEG      | ---      |

| WEAR METALS |     | method      | limit/base | current      | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185m | >80        | <b>57</b>    | 34       | ---      |
| Chromium    | ppm | ASTM D5185m | >5         | <b>3</b>     | 1        | ---      |
| Nickel      | ppm | ASTM D5185m | >2         | <b>1</b>     | <1       | ---      |
| Titanium    | ppm | ASTM D5185m |            | <b>&lt;1</b> | <1       | ---      |
| Silver      | ppm | ASTM D5185m | >3         | <b>0</b>     | 0        | ---      |
| Aluminum    | ppm | ASTM D5185m | >30        | <b>8</b>     | 16       | ---      |
| Lead        | ppm | ASTM D5185m | >30        | <b>0</b>     | <1       | ---      |
| Copper      | ppm | ASTM D5185m | >150       | <b>1</b>     | 5        | ---      |
| Tin         | ppm | ASTM D5185m | >5         | <b>&lt;1</b> | <1       | ---      |
| Vanadium    | ppm | ASTM D5185m |            | <b>0</b>     | <1       | ---      |
| Cadmium     | ppm | ASTM D5185m |            | <b>0</b>     | 0        | ---      |

| ADDITIVES  |     | method      | limit/base | current      | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185m | 0          | <b>52</b>    | 208      | ---      |
| Barium     | ppm | ASTM D5185m | 0          | <b>4</b>     | 0        | ---      |
| Molybdenum | ppm | ASTM D5185m | 0          | <b>74</b>    | 78       | ---      |
| Manganese  | ppm | ASTM D5185m |            | <b>&lt;1</b> | <1       | ---      |
| Magnesium  | ppm | ASTM D5185m | 0          | <b>529</b>   | 341      | ---      |
| Calcium    | ppm | ASTM D5185m |            | <b>1662</b>  | 1356     | ---      |
| Phosphorus | ppm | ASTM D5185m |            | <b>860</b>   | 929      | ---      |
| Zinc       | ppm | ASTM D5185m |            | <b>1005</b>  | 1143     | ---      |
| Sulfur     | ppm | ASTM D5185m |            | <b>3882</b>  | 2962     | ---      |




| CONTAMINANTS |     | method      | limit/base | current   | history1 | history2 |
|--------------|-----|-------------|------------|-----------|----------|----------|
| Silicon      | ppm | ASTM D5185m | >20        | <b>19</b> | 8        | ---      |
| Sodium       | ppm | ASTM D5185m |            | <b>9</b>  | 5        | ---      |
| Potassium    | ppm | ASTM D5185m | >20        | <b>5</b>  | 34       | ---      |

| INFRA-RED |          | method      | limit/base | current     | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844 | >3         | <b>0.8</b>  | 0.5      | ---      |
| Nitration | Abs/cm   | *ASTM D7624 | >20        | <b>12.2</b> | 10.5     | ---      |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30        | <b>24.0</b> | 23.7     | ---      |

| FLUID DEGRADATION |          | method      | limit/base | current     | history1 | history2 |
|-------------------|----------|-------------|------------|-------------|----------|----------|
| Oxidation         | Abs/.1mm | *ASTM D7414 | >25        | <b>22.3</b> | 18.7     | ---      |
| Base Number (BN)  | mg KOH/g | ASTM D2896  | 9.4        | <b>6.4</b>  | 5.10     | ---      |







# OIL ANALYSIS REPORT

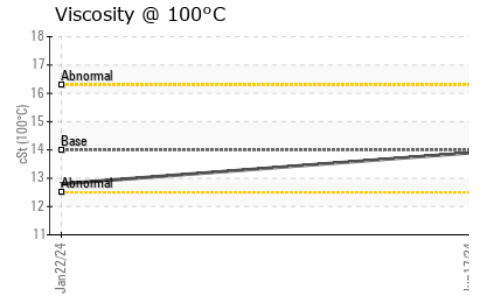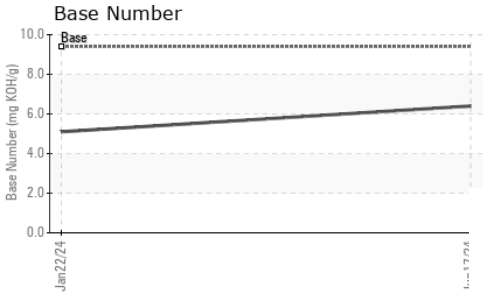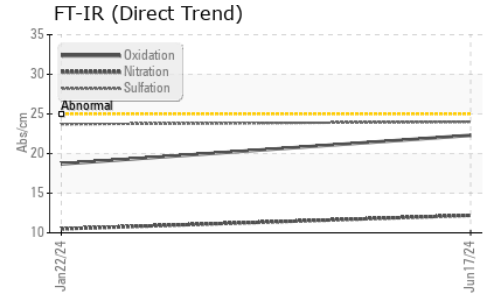

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      |
| Debris           | scalar | *Visual    | NONE    | NONE     | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | ---      |
| Free Water       | scalar | *Visual    |         | NEG      | ---      |

| FLUID PROPERTIES | method | limit/base   | current     | history1 | history2 |
|------------------|--------|--------------|-------------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445 14 | <b>13.9</b> | 12.8     | ---      |

## GRAPHS

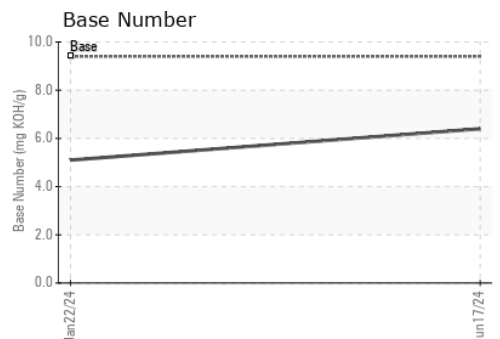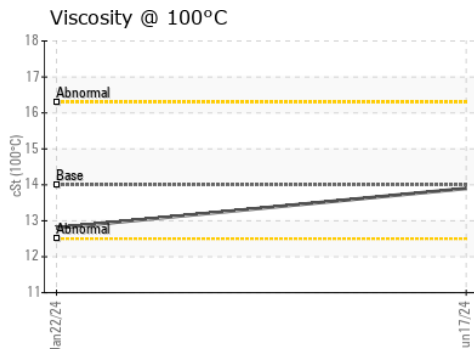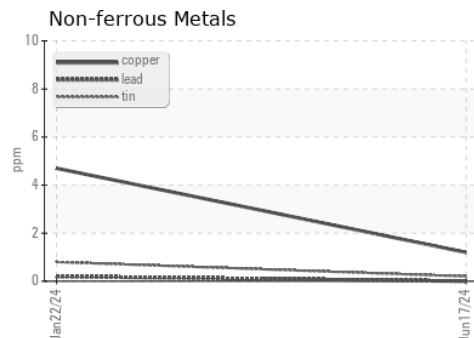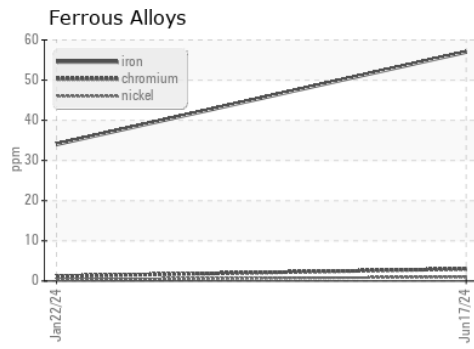

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0004298      **Received** : 17 Jul 2024  
**Lab Number** : **06239682**      **Tested** : 18 Jul 2024  
**Unique Number** : 11128516      **Diagnosed** : 18 Jul 2024 - Wes Davis  
**Test Package** : FLEET

**Sapp Bros. Petroleum - Sioux City**  
 129 STEUBEN ST  
 SIOUX CITY, IA  
 US 51106  
 Contact: JASON MAHRT  
 jmahrt@sappbros.net  
 T: (712)203-5443  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)