


OIL ANALYSIS REPORT

Sample Rating Trend

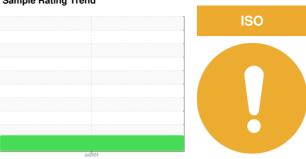

Machine Id

U105533 (S/N 5250)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		L		Jul2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
	MATION		IIIIIIVDase	current		HISTOTYZ
Sample Number		Client Info		KCPA018234		
Sample Date		Client Info		09 Jul 2024		
Machine Age	hrs	Client Info		54095		
Oil Age	hrs	Client Info		1000		
Oil Changed		Client Info		Changed		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	5		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	<1		
Silver	ppm	ASTM D5185m	>2	<1		
Aluminum	ppm	ASTM D5185m	>10	9		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	2		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	90	5		
Calcium	ppm	ASTM D5185m	2	0		
Phosphorus	ppm	ASTM D5185m		176		
Zinc	ppm	ASTM D5185m		31		
Sulfur	ppm	ASTM D5185m		10228		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>0.05	0.010		
ppm Water	ppm	ASTM D6304	>500	101		
FLUID CLEANLIN	IESS _	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		5307		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	91		
Particles >21µm		ASTM D7647	>20	18		
Particles >38µm		ASTM D7647	>4	2		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	20/18/14		
FLUID DEGRADA	ATION _	method	limit/base	current	history1	history2
A sial Niversland (ANI)		AOTA DOOAF	0.4	0.70		


Acid Number (AN)

mg KOH/g ASTM D8045 0.4

0.78



OIL ANALYSIS REPORT

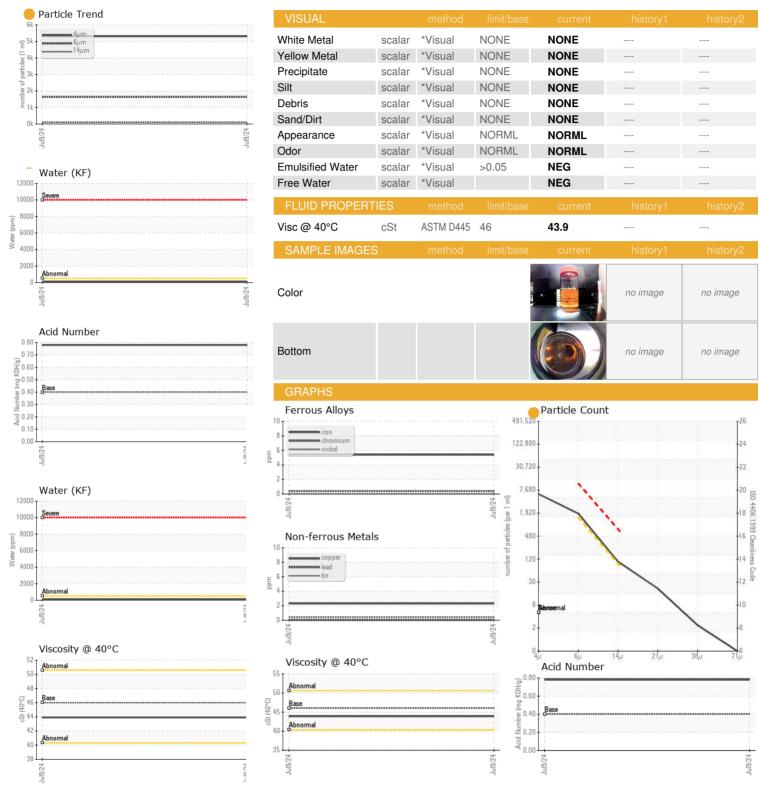



Certificate 12367

Laboratory Sample No.

Lab Number : 06240337

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA018234 Unique Number : 11129171

Received **Tested** Diagnosed

: 18 Jul 2024 : 19 Jul 2024 : 20 Jul 2024 - Don Baldridge

Test Package : IND 2 (Additional Tests: KF, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

SCHUTZ CONTAINER

13170 MARLAY AVE FONTANA, CA US 92337

Contact: JOEL WIRTH joel.wirth@shuetz.net

T: F:

Report Id: SCHFON [WUSCAR] 06240337 (Generated: 07/21/2024 11:17:19) Rev: 1

Contact/Location: JOEL WIRTH - SCHFON