




# OIL ANALYSIS REPORT

Sample Rating Trend

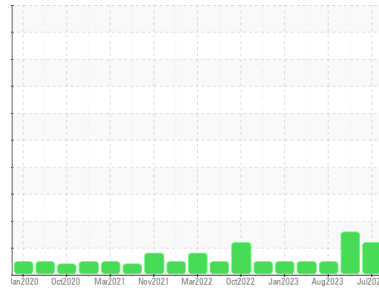

ISO



Machine Id  
**C-10 (S/N 01362-003-1-01-01)**

Component  
**Compressor**

Fluid  
**USPI ALT-68 SC (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>USP0014973</b>	USP0007341	USP0000776
Sample Date	Client Info	<b>17 Jul 2024</b>	07 Mar 2024	06 Aug 2023
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>ATTENTION</b>	ABNORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	0	0
Chromium	ppm	ASTM D5185m >10	0	0
Nickel	ppm	ASTM D5185m	0	0
Titanium	ppm	ASTM D5185m	0	<1
Silver	ppm	ASTM D5185m	0	0
Aluminum	ppm	ASTM D5185m >25	0	1
Lead	ppm	ASTM D5185m >25	0	0
Copper	ppm	ASTM D5185m >50	0	0
Tin	ppm	ASTM D5185m >15	0	0
Vanadium	ppm	ASTM D5185m	0	0
Cadmium	ppm	ASTM D5185m	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0
Barium	ppm	ASTM D5185m	0	0
Molybdenum	ppm	ASTM D5185m	0	0
Manganese	ppm	ASTM D5185m	0	0
Magnesium	ppm	ASTM D5185m	0	0
Calcium	ppm	ASTM D5185m	0	0
Phosphorus	ppm	ASTM D5185m	0	0
Zinc	ppm	ASTM D5185m	0	0
Sulfur	ppm	ASTM D5185m 50	0	0

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	0	1
Sodium	ppm	ASTM D5185m	<1	<1
Potassium	ppm	ASTM D5185m >20	0	<1
Water	%	ASTM D6304 >0.1	<b>0.004</b>	0.001
ppm Water	ppm	ASTM D6304 >1000	<b>48</b>	6

## FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	<b>13621</b>	▲ 167401	664
Particles >6µm	ASTM D7647 >2500	<b>3943</b>	▲ 79182	123
Particles >14µm	ASTM D7647 >320	<b>86</b>	▲ 363	5
Particles >21µm	ASTM D7647 >80	<b>15</b>	31	1
Particles >38µm	ASTM D7647 >20	<b>0</b>	0	0
Particles >71µm	ASTM D7647 >4	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >20/18/15	<b>21/19/14</b>	▲ 25/23/16	17/14/10

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.005	<b>0.014</b>	0.014




# OIL ANALYSIS REPORT

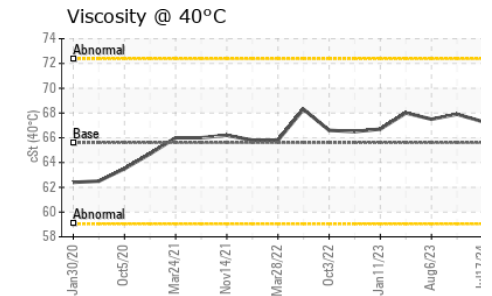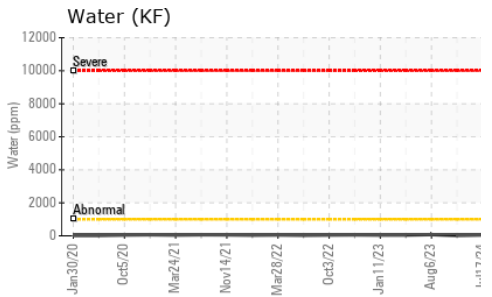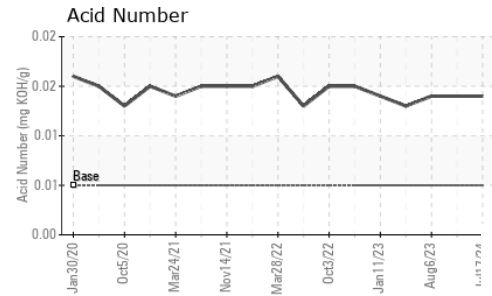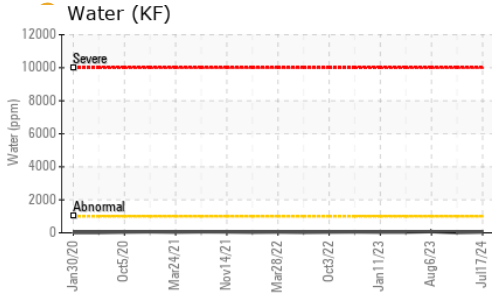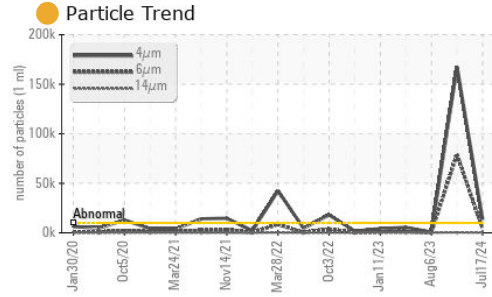






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	65.6	67.3	67.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

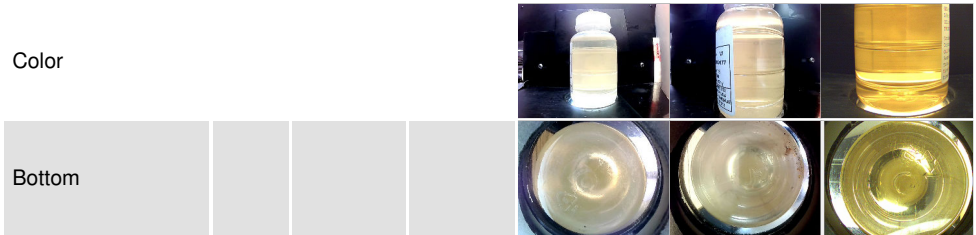

## GRAPHS

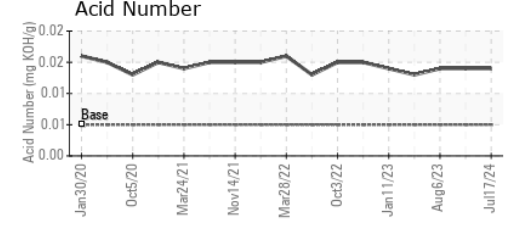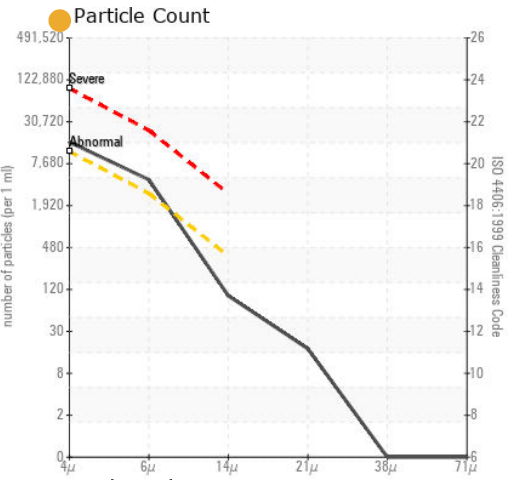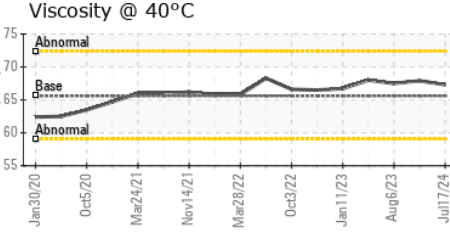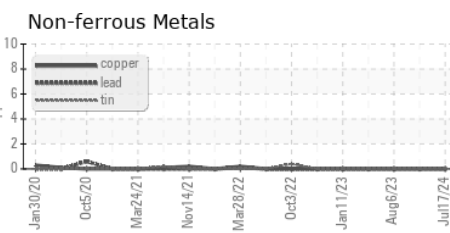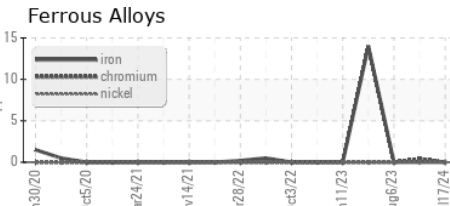

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : USP0014973  
 Lab Number : 06240393  
 Unique Number : 11129227  
 Test Package : IND 2

Received : 18 Jul 2024  
 Tested : 19 Jul 2024  
 Diagnosed : 19 Jul 2024 - Doug Bogart

TRIUMPH FOODS

Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)