


# **OIL ANALYSIS REPORT**

Sample Rating Trend



NORMAL



Machine Id

# 0-4 MYCOM ER1 (S/N 2535167)

Refrigeration Compressor

USPI ALT-68 SC (140 GAL)

### DIAGNOSIS

## Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

## Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.


# **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		12015 Oct20	6 Oct2017 Nov2018	Feb2020 Apr2021 May2022 A	hpr2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0014987	USP0006665	USP0004803
Sample Date		Client Info		12 Jul 2024	25 Apr 2024	04 Jan 2024
Machine Age	hrs	Client Info		57971	57839	57836
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	<1	0	1
Chromium	ppm	ASTM D5185m	>2	0	0	<1
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	0	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	<1
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	0	0	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	0	0
Sodium	ppm	ASTM D5185m		<1	0	0
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water	%	ASTM D6304	>0.01	0.003	0.010	0.003
ppm Water	ppm	ASTM D6304	>100	39	103	37
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	952	1328	1411
Particles >6µm		ASTM D7647	>2500	255	280	302
Particles >14µm		ASTM D7647	>320	19	18	16
Particles >21µm		ASTM D7647	>80	5	4	3
Particles >38µm		ASTM D7647	>20	1	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	17/15/11	18/15/11	18/15/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.013	0.013





# **OIL ANALYSIS REPORT**

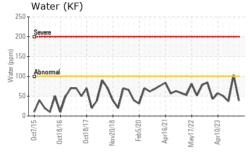










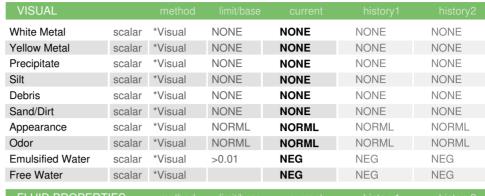



FLUID PROPERT	IES	method			history1	history2
Visc @ 40°C	cSt	ASTM D445	65.6	62.9	64.2	63.7

SAMPLE IMAGES	method		history2

Color





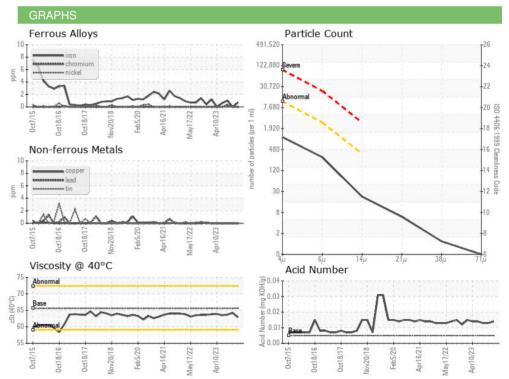





Certificate 12367

Laboratory

Sample No. Lab Number : 06240403 Unique Number : 11129237 Test Package : IND 2

: USP0014987

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 18 Jul 2024

**Tested** : 19 Jul 2024 Diagnosed : 19 Jul 2024 - Doug Bogart KraftHeinz - Newberry - Plant 8335

3704 LOUIS RICH DR NEWBERRY, SC US 29108

Contact:

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)