

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id

40-6 GEA ER1 (S/N Z0653)

Component Refrigeration Compressor

USPI ALT-68 SC (70 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		±2015 May201	7 Apr2018 Jan2019 Jul2	020 Jun2021 Feb2022 Oct2022	0et2023	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0014982	USP0006670	USP0004798
Sample Date		Client Info		12 Jul 2024	25 Apr 2024	03 Jan 2024
Machine Age	hrs	Client Info		68857	66583	64345
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	2	2
Chromium	ppm	ASTM D5185m	>2	0	0	<1
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>3	0	0	0
Lead	ppm	ASTM D5185m	>2	0	0	0
Copper	ppm	ASTM D5185m	>8	0	0	0
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		0	0	0
Calcium	ppm	ASTM D5185m		0	0	2
Phosphorus	ppm	ASTM D5185m		0	0	0
Zinc	ppm	ASTM D5185m		0	0	0
Sulfur	ppm	ASTM D5185m	50	0	0	0
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1
Sodium	ppm	ASTM D5185m		<1	<1	0
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Water	%	ASTM D6304	>0.01	0.001	0.007	0.004
ppm Water	ppm	ASTM D6304	>100	9	79	43
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	1684	<u>▲</u> 57047	1823
Particles >6µm		ASTM D7647	>2500	404	<u>▲</u> 7443	321
Particles >14µm		ASTM D7647	>640	21	66	11
Particles >21µm		ASTM D7647	>160	4	9	4
Particles >38µm		ASTM D7647	>40	0	0	0
Particles >71μm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/16	18/16/12	2 3/20/13	18/16/11
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974	0.005	0.014	0.013	0.014



OIL ANALYSIS REPORT

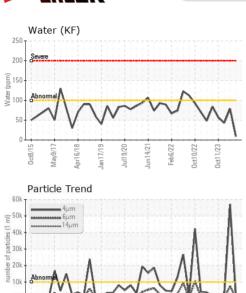

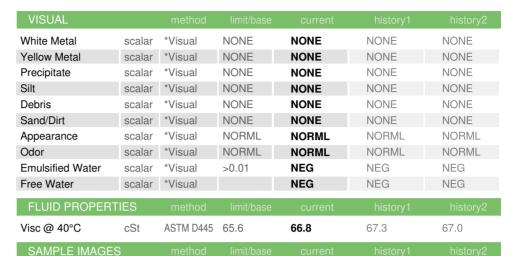



Water (KF) 250 Water




Color







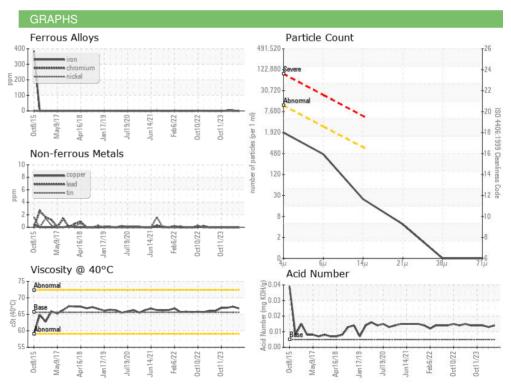





Certificate 12367

Laboratory Sample No. Lab Number

Test Package : IND 2

: USP0014982 : 06240423 Unique Number : 11129257

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 18 Jul 2024

Tested : 19 Jul 2024 Diagnosed

: 19 Jul 2024 - Doug Bogart

KraftHeinz - Newberry - Plant 8335 3704 LOUIS RICH DR NEWBERRY, SC US 29108

Contact:

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)