




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**OKLAHOMA/102**  
Machine Id  
**69.104L [OKLAHOMA^102]**  
Component  
**Front Differential**  
Fluid  
**MOBIL MOBILTRANS HD 50 (--- GAL)**

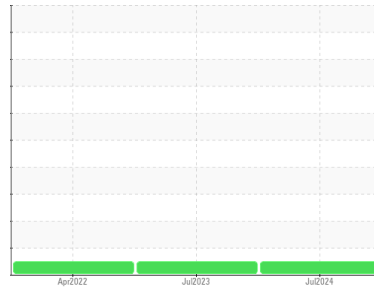

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0935156</b>	WC0834135	WC0665206
Sample Date	Client Info			<b>12 Jul 2024</b>	20 Jul 2023	06 Apr 2022
Machine Age	hrs	Client Info		<b>3187</b>	2190	10
Oil Age	hrs	Client Info		<b>2900</b>	2190	10
Oil Changed	Client Info			<b>N/A</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	<b>263</b>	230	9
Chromium	ppm	ASTM D5185m	>3	<b>3</b>	2	<1
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>30	<b>6</b>	6	2
Lead	ppm	ASTM D5185m	>13	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>103	<b>88</b>	78	2
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>5</b>	4	2
Manganese	ppm	ASTM D5185m		<b>3</b>	3	<1
Magnesium	ppm	ASTM D5185m		<b>10</b>	11	12
Calcium	ppm	ASTM D5185m		<b>3178</b>	3309	3308
Phosphorus	ppm	ASTM D5185m		<b>1181</b>	1097	1076
Zinc	ppm	ASTM D5185m		<b>1261</b>	1304	1283
Sulfur	ppm	ASTM D5185m		<b>9053</b>	10182	7489

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>100	<b>27</b>	24	10
Sodium	ppm	ASTM D5185m		<b>0</b>	1	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG



# OIL ANALYSIS REPORT

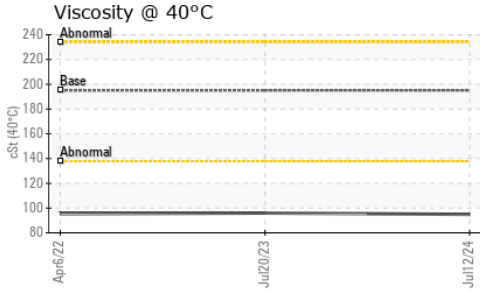





### FLUID PROPERTIES

method	limit/base	current	history1	history2		
Visc @ 40°C	cSt	ASTM D445	195	<b>94.9</b>	96.0	95.4

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

### GRAPHS

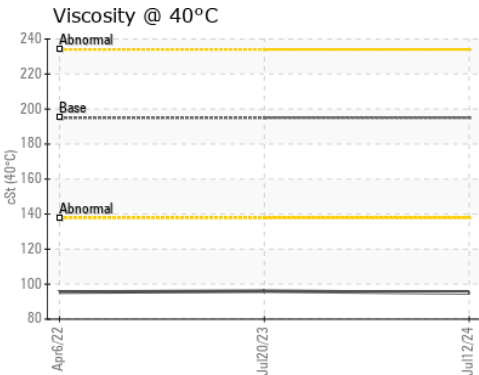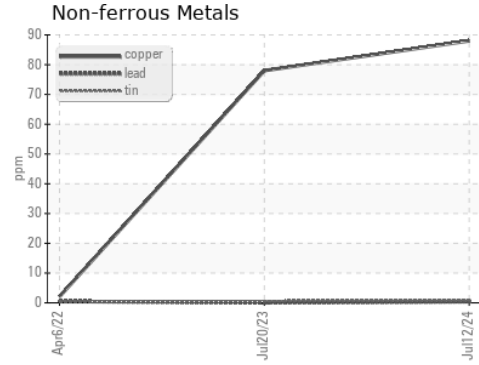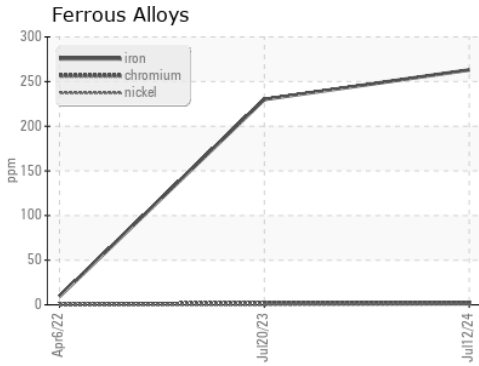

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0935156  
**Lab Number** : 06240684  
**Unique Number** : 11129518  
**Test Package** : CONST

**Received** : 18 Jul 2024  
**Tested** : 19 Jul 2024  
**Diagnosed** : 20 Jul 2024 - Don Baldrige

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)