




# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**



Area  
**OKLAHOMA/102**  
Machine Id  
**69.104L [OKLAHOMA^102]**  
Component  
**Middle Differential**  
Fluid  
**MOBIL MOBILTRANS HD 50 (--- GAL)**

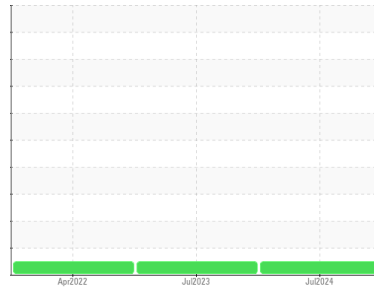

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0935148</b>	WC0834028	WC0665207
Sample Date	Client Info		<b>11 Jul 2024</b>	20 Jul 2023	06 Apr 2022
Machine Age	hrs	Client Info	<b>2900</b>	2190	10
Oil Age	hrs	Client Info	<b>2900</b>	2190	10
Oil Changed	Client Info		<b>N/A</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>500	<b>213</b>	190	9
Chromium	ppm	ASTM D5185m	>3	<b>2</b>	2	<1
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>30	<b>6</b>	6	2
Lead	ppm	ASTM D5185m	>13	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>103	<b>94</b>	87	2
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Barium	ppm	ASTM D5185m		<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>4</b>	4	1
Manganese	ppm	ASTM D5185m		<b>3</b>	3	<1
Magnesium	ppm	ASTM D5185m		<b>9</b>	10	12
Calcium	ppm	ASTM D5185m		<b>3221</b>	3275	3255
Phosphorus	ppm	ASTM D5185m		<b>1268</b>	1078	1056
Zinc	ppm	ASTM D5185m		<b>1318</b>	1285	1257
Sulfur	ppm	ASTM D5185m		<b>9974</b>	10089	7435

## CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>100	<b>27</b>	25	10
Sodium	ppm	ASTM D5185m		<b>0</b>	2	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0

## VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual		<b>NEG</b>	NEG	NEG






# OIL ANALYSIS REPORT

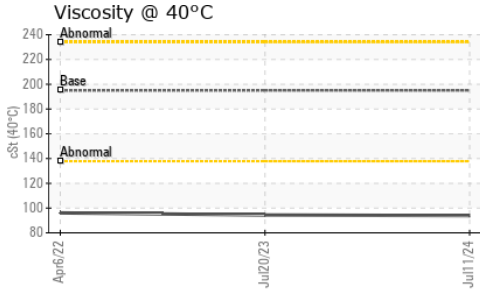

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 195	<b>93.9</b>	94.4	96.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

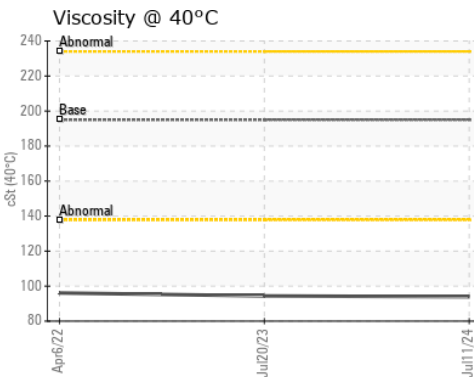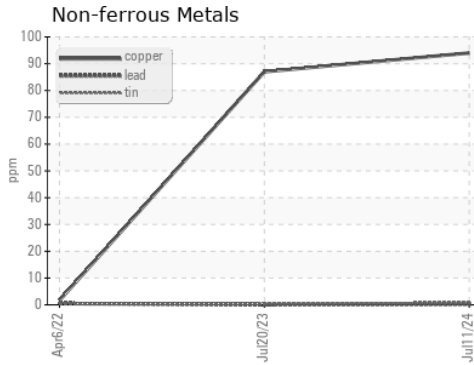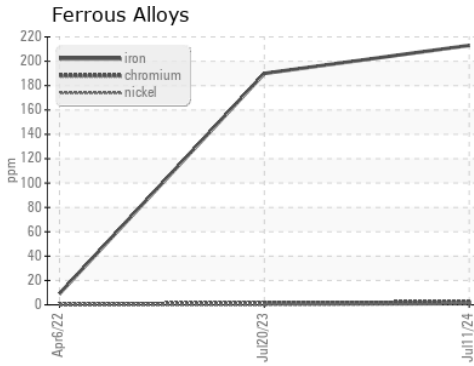

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0935148  
**Lab Number** : 06240685  
**Unique Number** : 11129519  
**Test Package** : CONST

**Received** : 18 Jul 2024  
**Tested** : 19 Jul 2024  
**Diagnosed** : 20 Jul 2024 - Don Baldrige

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213  
 Contact: DOUG KING  
 doug.king@sherwood.net  
 T: (316)617-3161  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)