


OIL ANALYSIS REPORT



Machine Id
CATERPILLAR 775F HAUL TRUCK 6151 (S/N DLS00524)
Component
Rear Left Differential
Fluid
TULCO LUBSOIL TO-4 50 (--- GAL)

Sample Rating Trend

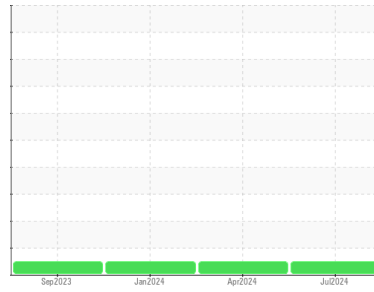

NORMAL

DIAGNOSIS

- Recommendation**
Resample at the next service interval to monitor.
- Wear**
All component wear rates are normal.
- Contamination**
There is no indication of any contamination in the oil.
- Fluid Condition**
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION method limit/base current history1 history2

Sample Number	Client Info		TO10003676	TO10003023	TO10002979
Sample Date	Client Info		15 Jul 2024	20 Apr 2024	26 Jan 2024
Machine Age	hrs	Client Info	2161	1657	1073
Oil Age	hrs	Client Info	2161	1657	1073
Oil Changed		Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION method limit/base current history1 history2

Water	WC Method	>.2	NEG	NEG	NEG
-------	-----------	-----	------------	-----	-----

WEAR METALS method limit/base current history1 history2

PQ		ASTM D8184		47	70	72
Iron	ppm	ASTM D5185m	>500	69	56	51
Chromium	ppm	ASTM D5185m	>3	<1	<1	<1
Nickel	ppm	ASTM D5185m	>3	<1	1	<1
Titanium	ppm	ASTM D5185m	>2	<1	1	<1
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>30	3	4	3
Lead	ppm	ASTM D5185m	>13	0	2	1
Copper	ppm	ASTM D5185m	>103	9	7	5
Tin	ppm	ASTM D5185m	>5	<1	1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
Cadmium	ppm	ASTM D5185m		0	<1	<1

ADDITIVES method limit/base current history1 history2

Boron	ppm	ASTM D5185m		5	4	3
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		1	2	2
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		14	22	26
Calcium	ppm	ASTM D5185m		3257	2851	2677
Phosphorus	ppm	ASTM D5185m		1023	957	958
Zinc	ppm	ASTM D5185m		1190	1099	1104
Sulfur	ppm	ASTM D5185m		5399	4328	4307





CONTAMINANTS method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>100	37	34	32
Sodium	ppm	ASTM D5185m		5	2	4
Potassium	ppm	ASTM D5185m	>20	<1	4	1

FLUID DEGRADATION method limit/base current history1 history2

Acid Number (AN)	mg KOH/g	ASTM D8045		1.09	1.20	1.06
------------------	----------	------------	--	-------------	------	------

OIL ANALYSIS REPORT

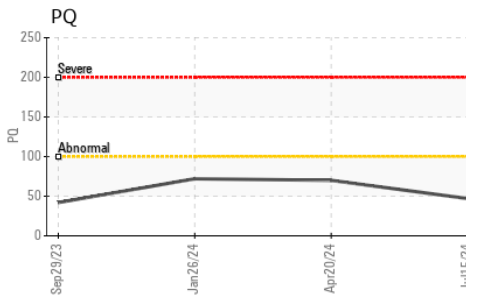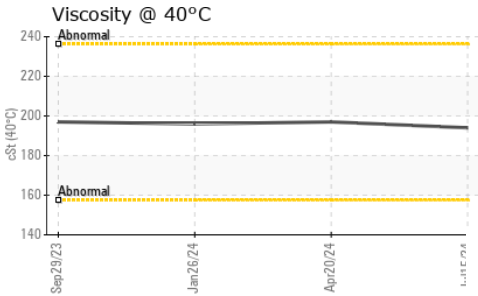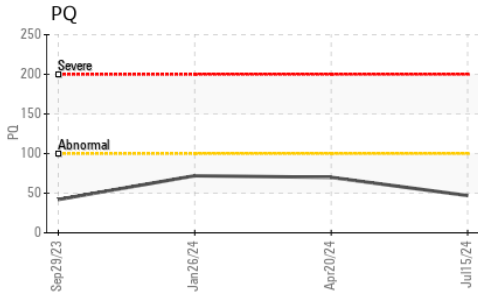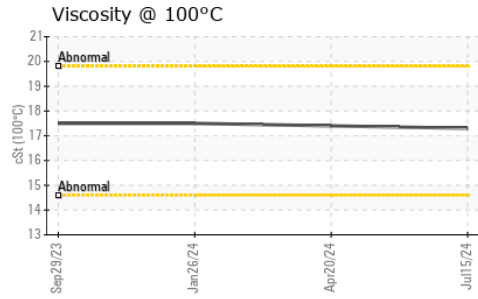









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	194	197	196
Visc @ 100°C	cSt	ASTM D445	17.3	17.4	17.5
Viscosity Index (VI)	Scale	ASTM D2270	95	94	96

SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

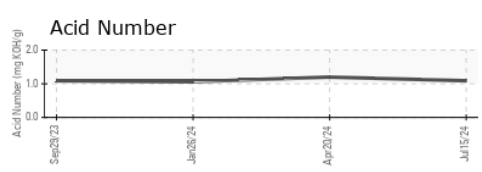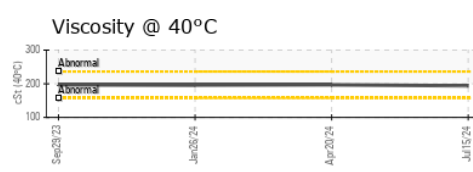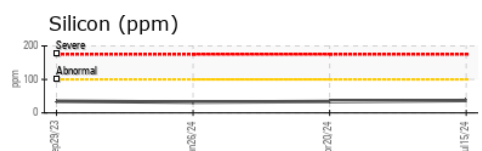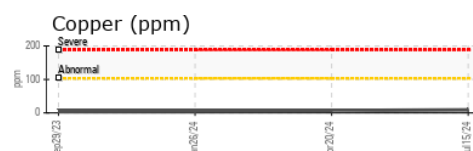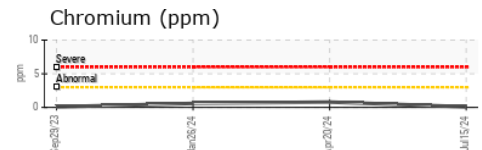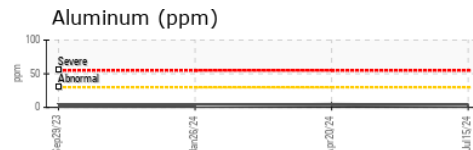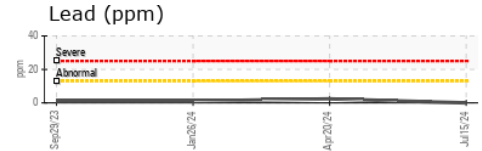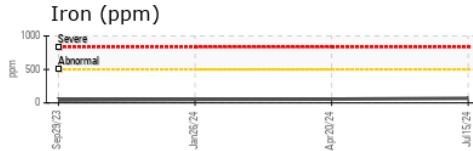

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10003676 **Received** : 18 Jul 2024
Lab Number : **06240995** **Tested** : 20 Jul 2024
Unique Number : 11129829 **Diagnosed** : 20 Jul 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137
 Contact: SKIP SAENGERHAUSEN
 skip@anchorstoneco.com
 T: (918)928-4575
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)