




# OIL ANALYSIS REPORT

## Sample Rating Trend

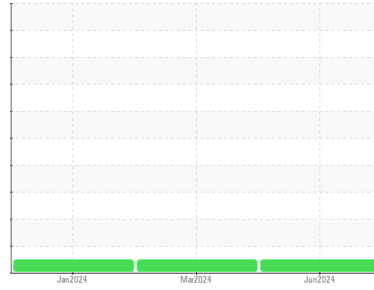

**NORMAL**



Machine Id  
**OSHKOSH MIXER 4413**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0949254</b>	WC0917314	WC0878797
Sample Date	Client Info			<b>28 Jun 2024</b>	26 Mar 2024	02 Jan 2024
Machine Age	mls	Client Info		<b>32141</b>	29343	3259
Oil Age	mls	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>4</b>	5	3
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	1	<1
Lead	ppm	ASTM D5185m	>40	<b>0</b>	1	<1
Copper	ppm	ASTM D5185m	>330	<b>0</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	1	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>6</b>	3	7
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>55</b>	55	52
Manganese	ppm	ASTM D5185m		<b>0</b>	1	<1
Magnesium	ppm	ASTM D5185m		<b>888</b>	881	930
Calcium	ppm	ASTM D5185m		<b>1062</b>	1042	1060
Phosphorus	ppm	ASTM D5185m		<b>976</b>	986	1005
Zinc	ppm	ASTM D5185m		<b>1182</b>	1161	1171
Sulfur	ppm	ASTM D5185m		<b>2946</b>	3345	3026




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>3</b>	4	3
Sodium	ppm	ASTM D5185m	>118	<b>2</b>	1	2
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.2</b>	6.0	6.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.8</b>	17.8	18.0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.8</b>	13.8	13.6
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.7</b>	8.6	8.8











# OIL ANALYSIS REPORT

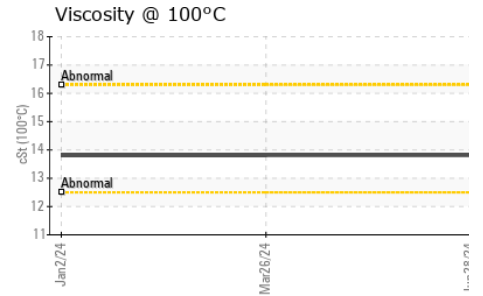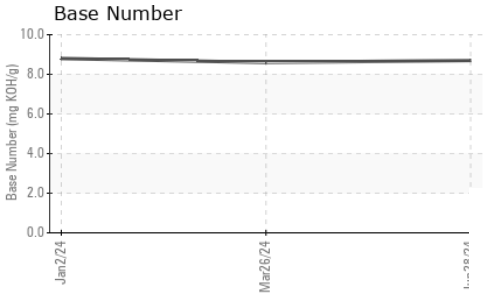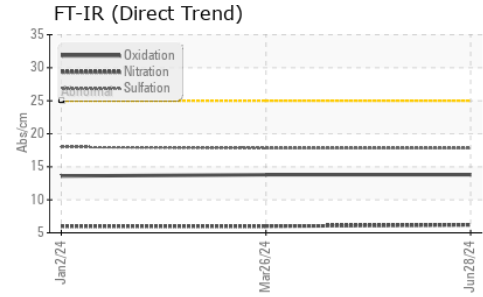

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.8	13.8	13.8

### GRAPHS

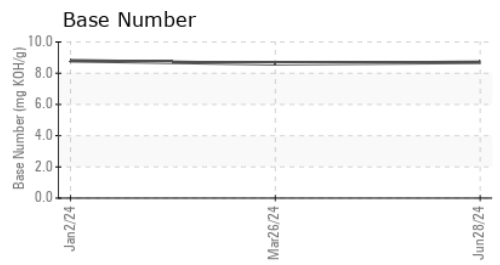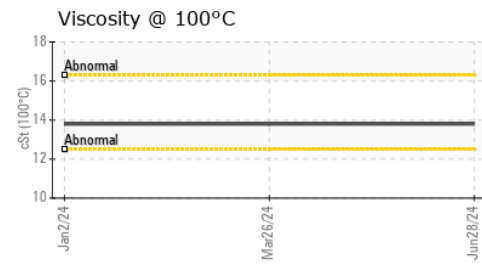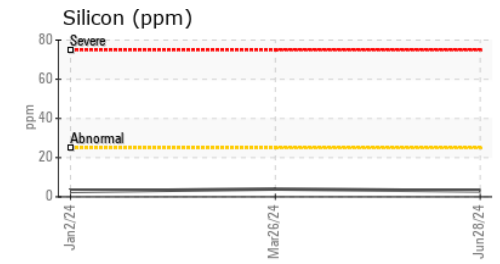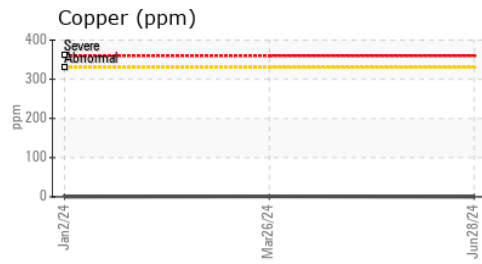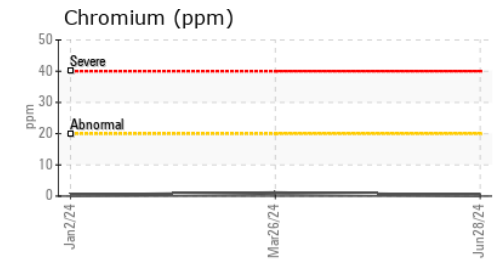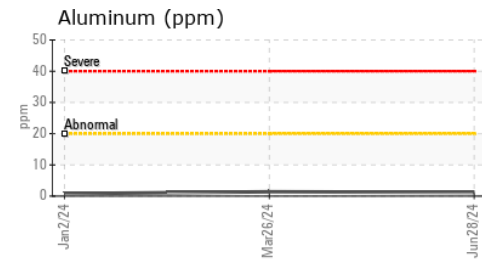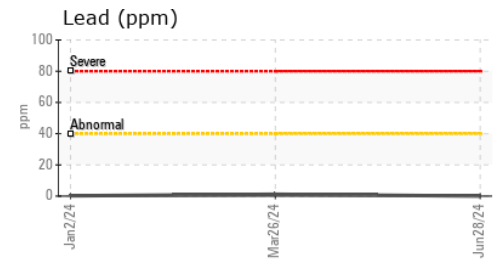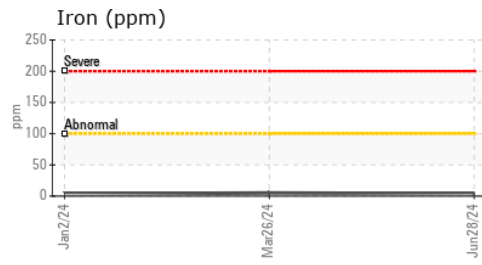

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0949254      **Received** : 19 Jul 2024  
**Lab Number** : 06241392      **Tested** : 20 Jul 2024  
**Unique Number** : 11130226      **Diagnosed** : 20 Jul 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**CONCRETE SERVICE CO - FAY BLOCK**  
 161 BUILDERS BLVD  
 FAYETTEVILLE, NC  
 US 28301  
 Contact: BRYAN VANNIMAN  
 bryanvanniman@fayblock.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)