

PROBLEM SUMMARY

Sample Rating Trend


ISO

KAESER SX 7.5 6790240 (S/N 1130)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

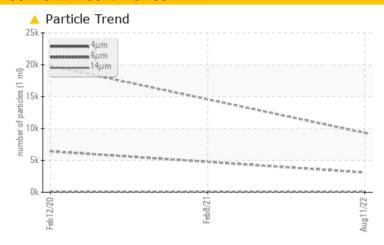

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS | | | | | | | |
|--------------------------|----------------|---------|----------|----------|----------------|--|--|
| Sample Status | | Al | BNORMAL | ABNORMAL | ABNORMAL | | |
| Particles >6µm | ASTM D7647 > | >1300 | 3102 | | <u>▲</u> 6432 | | |
| Particles >14µm | ASTM D7647 > | >80 | 88 | | <u> </u> | | |
| Oil Cleanliness | ISO 4406 (c) > | >/17/13 | 20/19/14 | | <u>^</u> 20/14 | | |

Customer Id: ATOMAD Sample No.: KCP48432 Lab Number: 05623832 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|---------------|--------|------|---------|---|
| Change Fluid | | | ? | Oil and filter change at the time of sampling has been noted. |
| Change Filter | | | ? | Oil and filter change at the time of sampling has been noted. |

HISTORICAL DIAGNOSIS

08 Feb 2021 Diag: Don Baldridge

WATER



We advise that you stop the unit and follow the water drain-off procedure for this component. The filter change at the time of sampling has been noted. We recommend an early resample in 500 hours to monitor this condition. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. There is a high amount of visible silt present in the sample. There is a moderate concentration of water present in the oil. The AN level is acceptable for this fluid.



12 Feb 2020 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

Sample Rating Trend



KAESER SX 7.5 6790240 (S/N 1130)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| | | Feb | 2020 | Feb2021 Aug2022 | | |
|-----------------|--------|--------------|------------|------------------------|-------------|---------------|
| SAMPLE INFORM | MATION | method | limit/base | current | history 1 | history 2 |
| Sample Number | | | | KCP48432 | KCP32565 | KCP20042 |
| Sample Date | | | | 11 Aug 2022 | 08 Feb 2021 | 12 Feb 2020 |
| Machine Age | hrs | | | 3306 | 2050 | 971 |
| Oil Age | hrs | | | 3000 | 1000 | 971 |
| Oil Changed | | | | Changed | Not Changd | Changed |
| Sample Status | | | | ABNORMAL | ABNORMAL | ABNORMAL |
| WEAR METALS | | method | limit/base | current | history 1 | history 2 |
| Iron | ppm | ASTM D5185m | >50 | <1 | 1 | 2 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >3 | 0 | <1 | 0 |
| Titanium | ppm | ASTM D5185m | >3 | 0 | <1 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | <1 | 0 |
| Aluminum | ppm | ASTM D5185m | >10 | <1 | <1 | <1 |
| Lead | ppm | ASTM D5185m | >10 | <1 | 2 | 1 |
| Copper | ppm | ASTM D5185m | >50 | 2 | 3 | 2 |
| Tin | ppm | ASTM D5185m | >10 | <1 | <1 | 0 |
| Antimony | ppm | ASTM D5185m | | | 0 | 2 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history 1 | history 2 |
| Boron | ppm | ASTM D5185m | 0 | 0 | 11 | 0 |
| Barium | ppm | ASTM D5185m | 90 | 0 | 2 | 5 |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | <1 | <1 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 100 | 59 | 64 | 79 |
| Calcium | ppm | ASTM D5185m | 0 | 0 | 0 | 3 |
| Phosphorus | ppm | ASTM D5185m | 0 | 4 | 7 | 2 |
| Zinc | ppm | ASTM D5185m | 0 | 9 | 7 | 13 |
| Sulfur | ppm | ASTM D5185m | 23500 | 19179 | 17778 | 16178 |
| CONTAMINANTS | 3 | method | limit/base | current | history 1 | history 2 |
| Silicon | ppm | ASTM D5185m | >25 | 1 | 2 | <1 |
| Sodium | ppm | ASTM D5185m | | 17 | 16 | 15 |
| Potassium | ppm | ASTM D5185m | >20 | <1 | 2 | <1 |
| Water | % | ASTM D6304 | >0.05 | 0.014 | △ 0.428 | 0.013 |
| ppm Water | ppm | ASTM D6304 | >500 | 149.9 | 4280 | 138.4 |
| FLUID CLEANLIN | IESS | method | limit/base | current | history 1 | history 2 |
| Particles >4µm | | ASTM D7647 | | 9321 | | 19842 |
| Particles >6µm | | ASTM D7647 | >1300 | <u></u> 4 3102 <u></u> | | △ 6432 |
| Particles >14μm | | ASTM D7647 | >80 | <u>^</u> 88 | | <u> </u> |
| Particles >21µm | | ASTM D7647 | >20 | 9 | | 20 |
| Particles >38μm | | ASTM D7647 | >4 | 0 | | 3 |
| Particles >71µm | | ASTM D7647 | >3 | 0 | | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | <u>^</u> 20/19/14 | | △ 20/14 |
| FLUID DEGRADA | ATION | method | limit/base | current | history 1 | history 2 |
| | | | | | | |



OIL ANALYSIS REPORT

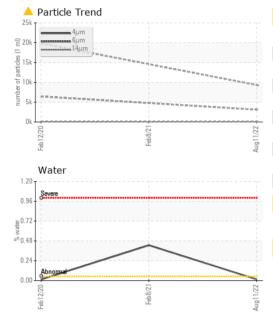

| VISUAL | | method | limit/base | current | history 1 | history 2 |
|-------------------------|--------|-----------|------------|---------|---------------|-----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | ▲ HEAVY | NONE |
| Debris | scalar | *Visual | NONE | LIGHT | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | ▲ HAZY | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | △ 0.2% | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |
| FLUID PROPERT | TES | method | limit/base | current | history 1 | history 2 |
| Visc @ 40°C | cSt | ASTM D445 | 45 | 46.8 | 43.9 | 43.9 |
| SAMPLE IMAGES | 3 | method | limit/base | current | history 1 | history 2 |
| Color | | | | | | |
| Bottom | | | | | | 100 |

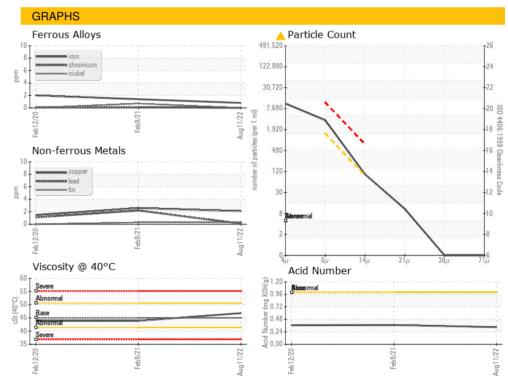





Laboratory Sample No. Lab Number

: KCP48432 : 05623832 Unique Number : 10103339

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received Diagnosed

: 24 Aug 2022 Diagnostician : Don Baldridge

: 22 Aug 2022

Test Package : IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

A TO Z RENTAL & SALES

2209 S STOUGHTON RD MADISON, WI USA 53716

Contact: Service Manager

T: F: