

PROBLEM SUMMARY

Sample Rating Trend

ISO


 $\frac{\text{Machine Id}}{7895339}$ (S/N 1202)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

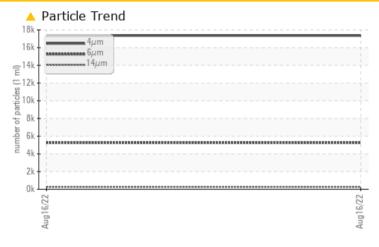

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TES	T RESULTS			
Sample Status			ABNORMAL	
Particles >6µm	ASTM D7647	>1300	<u> </u>	
Particles >14μm	ASTM D7647	>80	259	
Particles >21µm	ASTM D7647	>20	<u> </u>	
Oil Cleanliness	ISO 4406 (c)	>/17/13	21/20/15	

Customer Id: FORENGCO Sample No.: KCP50621 Lab Number: 05627951 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS				
Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

3T

Sample Rating Trend

ISO

A

Machine Id

7895339 (S/N 1202)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Aug2022		
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number				KCP50621		
Sample Date				16 Aug 2022		
Machine Age	hrs			3499		
Oil Age	hrs			3499		
Oil Changed				Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum		ASTM D5185m		1		
Lead	ppm	ASTM D5185m	>10	0		
	ppm					
Copper	ppm	ASTM D5185m		5		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	100	3		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	4		
Zinc	ppm	ASTM D5185m	0	22		
Sulfur	ppm	ASTM D5185m	23500	16893		
CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	12		
Sodium	ppm	ASTM D5185m	>L0	1		
Potassium		ASTM D5185m	>20	0		
Water	ppm %	ASTM D5165111	>0.05	0.006		
ppm Water	ppm	ASTM D6304	>50.05	64.3		
FLUID CLEANLIN		method	limit/base	current	history 1	history 2
			mmedase			
Particles >4µm		ASTM D7647	. 1000	17357		
Particles >6µm		ASTM D7647	>1300	<u>^</u> 5252		
Particles >14µm		ASTM D7647	>80	<u>^</u> 259		
Particles >21μm		ASTM D7647	>20	<u>^</u> 54		
Particles >38μm		ASTM D7647	>4	2		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 21/20/15		
FLUID DEGRADA	TION	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.41		



OIL ANALYSIS REPORT

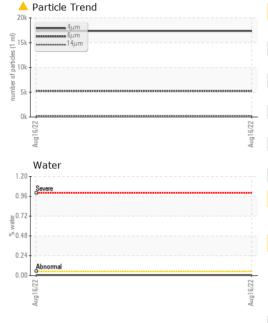

VIOLIAL		and the seal	Provide the second		for the control of	la la tarre o
VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	LIGHT		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	IES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	45	44.3		
SAMPLE IMAGES	3	method	limit/base	current	history 1	history 2
Color					no image	no image

Ferrous Alloys	Aparticle Count	
iron		
- management nickel	122,880	
<u> </u>	30,720	
2	7,680	
Aug16,722	Aug 16/22 (per 1 ml	
Non-ferrous Metals	Aug 16/22 1700 -	
copper	120-	
- tin lead	- 30 -	
	8 Sebreve mal	
22		
Aug16/22.	27- 2- 2-	
Viscosity @ 40°C	4μ 6μ 14μ Acid Number	21μ 38μ 7
Severe	1.20 Appenmal Appenman Appenma	
Abnormal	© 0.75 † 7	
Abnomai	ag 0.48	
Severe	S 0.24	



Laboratory Sample No. Lab Number Unique Number : 10112472

: KCP50621 : 05627951

Bottom

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received Diagnosed

: 26 Aug 2022 : 29 Aug 2022 Diagnostician : Don Baldridge

Test Package: IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

FORSCH POLYMER 3025 S WYANDOT ST ENGLEWOOD, CO

USA 80110

Contact: Service Manager

no image

no image