


Machine Id
KAESER SM 7.5 2942540 (S/N 1029)


Component
Compressor

Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

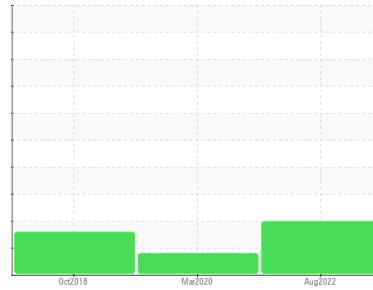

COMPONENT CONDITION SUMMARY

▲ Particle Trend

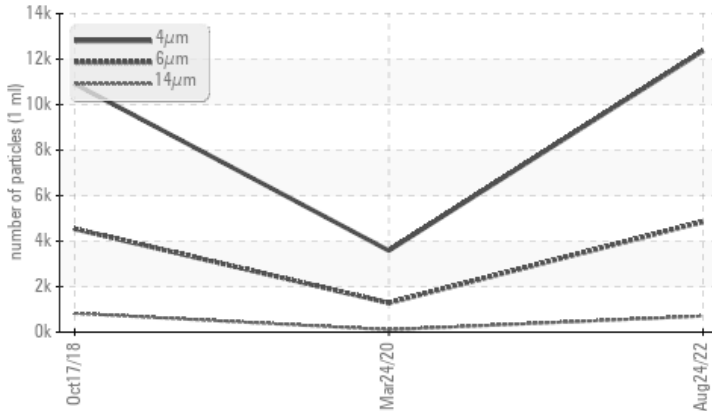

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ABNORMAL	ATTENTION	ABNORMAL
Particles >6µm	ASTM D7647	>1300	▲ 4847	1283	▲ 4539
Particles >14µm	ASTM D7647	>80	▲ 706	▲ 105	▲ 827
Particles >21µm	ASTM D7647	>20	▲ 137	▲ 36	▲ 277
Particles >38µm	ASTM D7647	>4	▲ 6	3	▲ 14
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 21/19/17	▲ 17/14	▲ 19/17

Customer Id: SELEUR
Sample No.: KCP37331
Lab Number: 05629566
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Doug Bogart +1 (800)237-1369 x4016
dougb@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

24 Mar 2020 Diag: Angela Borella

ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)



17 Oct 2018 Diag: Angela Borella

ISO




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

[view report](#)



Machine Id
KAESER SM 7.5 2942540 (S/N 1029)
Component
Compressor
Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

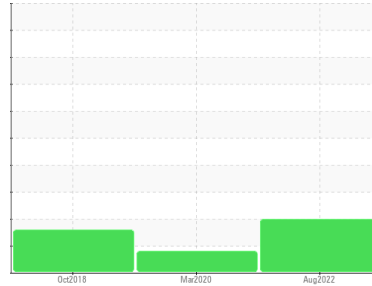

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number			KCP37331	KCP26809	KCP14961
Sample Date			24 Aug 2022	24 Mar 2020	17 Oct 2018
Machine Age	hrs		20359	17236	15327
Oil Age	hrs		3000	2908	1361
Oil Changed			Changed	Changed	Changed
Sample Status			ABNORMAL	ATTENTION	ABNORMAL

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >50	0	0	<1
Chromium	ppm	ASTM D5185m >10	0	0	<1
Nickel	ppm	ASTM D5185m >3	0	<1	<1
Titanium	ppm	ASTM D5185m >3	0	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >10	0	<1	<1
Lead	ppm	ASTM D5185m >10	0	0	0
Copper	ppm	ASTM D5185m >50	10	1	1
Tin	ppm	ASTM D5185m >10	0	0	0
Antimony	ppm	ASTM D5185m	---	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	<1	0

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m 0	0	0	0
Barium	ppm	ASTM D5185m 90	<1	4	3
Molybdenum	ppm	ASTM D5185m 0	0	0	<1
Manganese	ppm	ASTM D5185m	<1	0	<1
Magnesium	ppm	ASTM D5185m 100	23	62	66
Calcium	ppm	ASTM D5185m 0	0	1	<1
Phosphorus	ppm	ASTM D5185m 0	1	2	<1
Zinc	ppm	ASTM D5185m 0	51	12	10
Sulfur	ppm	ASTM D5185m 23500	17885	19027	19068

CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >25	<1	2	<1
Sodium	ppm	ASTM D5185m	9	17	16
Potassium	ppm	ASTM D5185m >20	0	7	0
Water	%	ASTM D6304 >0.05	0.017	0.024	0.028
ppm Water	ppm	ASTM D6304 >500	172.7	244.0	280


FLUID CLEANLINESS

	method	limit/base	current	history 1	history 2
Particles >4µm	ASTM D7647		12362	3583	10917
Particles >6µm	ASTM D7647 >1300		▲ 4847	1283	▲ 4539
Particles >14µm	ASTM D7647 >80		▲ 706	▲ 105	▲ 827
Particles >21µm	ASTM D7647 >20		▲ 137	▲ 36	▲ 277
Particles >38µm	ASTM D7647 >4		▲ 6	3	▲ 14
Particles >71µm	ASTM D7647 >3		0	0	0
Oil Cleanliness	ISO 4406 (c) >--/17/13		▲ 21/19/17	▲ 17/14	▲ 19/17

FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	0.33	0.381	0.365


OIL ANALYSIS REPORT

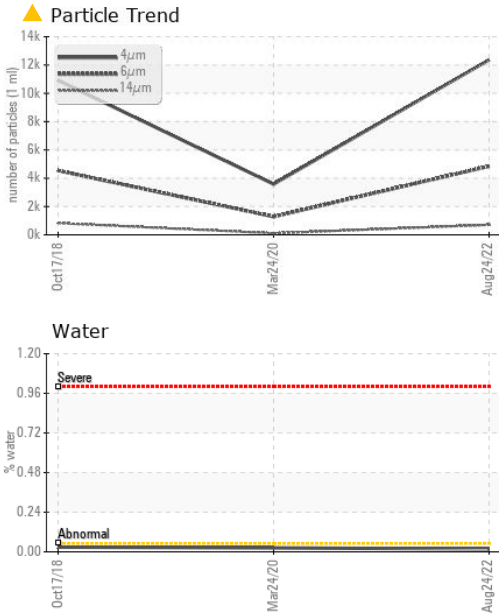


VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	45	48.4	45.8

SAMPLE IMAGES	method	limit/base	current	history 1	history 2
---------------	--------	------------	---------	-----------	-----------

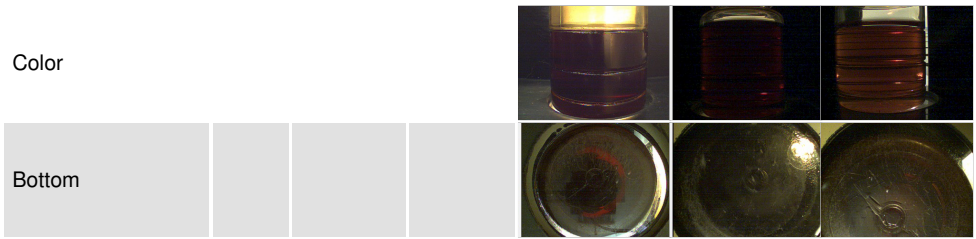

GRAPHS

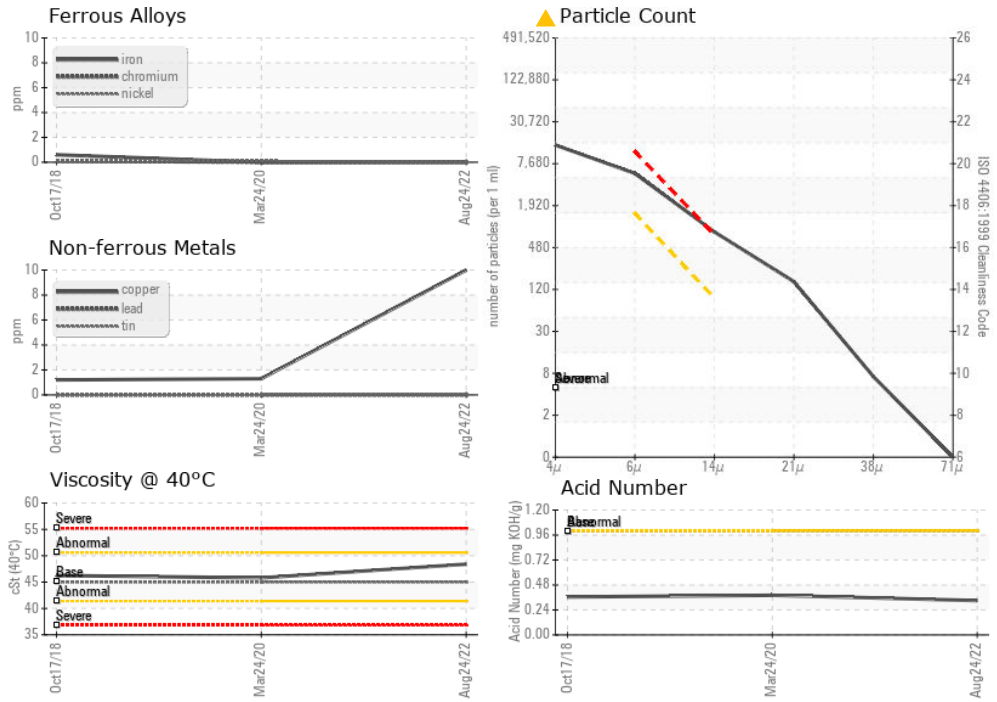

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCP37331 **Received** : 29 Aug 2022
Lab Number : 05629566 **Diagnosed** : 30 Aug 2022
Unique Number : 10114087 **Diagnostician** : Doug Bogart
Test Package : IND 2 (Additional Tests: KF, PrtCount)

SELBERTS AUTO BODY
 410 W 4TH ST
 EUREKA, MO
 USA 63025
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)