

PROBLEM SUMMARY

Sample Rating Trend

ISO


7861264 (S/N 1635)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

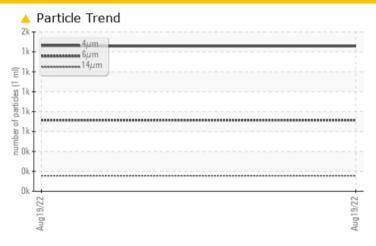

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST	T RESULTS			
Sample Status			ATTENTION	
Particles >14µm	ASTM D7647	>80	156	
Particles >21µm	ASTM D7647	>20	45	
Oil Cleanliness	ISO 4406 (c)	>/17/13	18/17/14	

Customer Id: VANOPE Sample No.: KCP48277 Lab Number: 05629592 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com


To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS					
Action	Status	Date	Done By	Description	
Change Fluid			?	Oil and filter change at the time of sampling has been noted.	
Change Filter			?	Oil and filter change at the time of sampling has been noted.	

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



ISO

7861264 (S/N 1635)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Aug2022		
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number				KCP48277		
Sample Date				19 Aug 2022		
Machine Age	hrs			3011		
Oil Age	hrs			3011		
Oil Changed				Changed		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	<1		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	17		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES	1-1-	method	limit/base	current	history 1	history 2
						Í
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	<1		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m	100	0		
Magnesium	ppm	ASTM D5185m	100	5		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	1		
Zinc	ppm	ASTM D5185m	0	11		
Sulfur	ppm	ASTM D5185m	23500	15698		
CONTAMINANTS	3	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m		0		
Water	%	ASTM D6304	>0.05	0.010		
ppm Water	ppm	ASTM D6304	>500	103.4		
FLUID CLEANLIN	NESS	method	limit/base	current	history 1	history 2
Particles >4μm		ASTM D7647		1456		
Particles >6µm		ASTM D7647		714		
Particles >14μm		ASTM D7647	>80	<u> </u>		
Particles >21μm		ASTM D7647	>20	<u>45</u>		
Particles >38μm		ASTM D7647	>4	4		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u> </u>		
FLUID DEGRADA	ATION	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.30		



OIL ANALYSIS REPORT

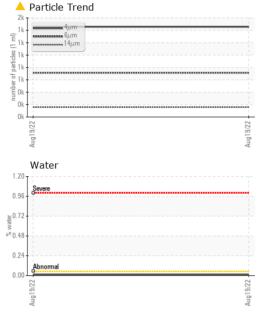

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	LIGHT		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	TES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	45	44.2		
SAMPLE IMAGES	3	method	limit/base	current	history 1	history 2
Color					no image	no image

Ferrous Alloys	Particle Count	
I	491,520	
iron saaaaaaaaa chromium	122,880	
	122,000	
† ;	30,720	
	7,680	
9/22	Aug 19/22 (m 1 m) (m 19/22 m)	
Aug19/22	1,920	
Non-ferrous Metals	480	
copper	Aug 19/22 170 170 170 170 170 170 170 170 170 170	

entranscent (III)	30 -	
1	8 Sibrese mal	
Aug 19,722	Aug19/22	
₹ Viscosity @ 40°C	4μ 6μ 14μ	21μ 38μ 7
T:	Acid Number	
Severe	8 0.96 Bisso rmal	
Abnormal Base	£0.72	
Base Abnormal	1.20 Bhearmal Bhearmal	
Severe	30.24	
Aug 19/22 4-6	Aug 19/22 + Aug 19	



Certificate L2367

Laboratory Sample No. Lab Number Unique Number : 10114113

: KCP48277 : 05629592

Bottom

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

: 29 Aug 2022 Diagnosed : 30 Aug 2022

Diagnostician : Doug Bogart

Test Package: IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

VAN NOSTRAND CABINETS

1819 PEPPERELL PKWY OPELITEA, AL

USA 36801

Contact: Service Manager

no image

no image