

## **PROBLEM SUMMARY**

Sample Rating Trend

ISO

Machine Id


# KAESER SFC1105 5945066 (S/N 1045)

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

## **COMPONENT CONDITION SUMMARY**

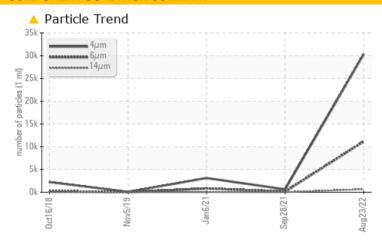

## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS							
Sample Status			ABNORMAL	NORMAL	NORMAL		
Particles >6µm	ASTM D7647	>1300	<u> </u>	154	835		
Particles >14µm	ASTM D7647	>160	<b>△</b> 677	6	39		
Particles >21µm	ASTM D7647	>40	<u>^</u> 60	0	9		
Oil Cleanliness	ISO 4406 (c)	>/17/14	<b>22/21/17</b>	14/10	17/12		

Customer Id: ALLDOV Sample No.: KC95233 Lab Number: 05629603 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

## **RECOMMENDED ACTIONS**

There are no recommended actions for this sample.

## HISTORICAL DIAGNOSIS

## 28 Sep 2021 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



### 06 Jan 2021 Diag: Angela Borella

NORMAL



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



## 05 Nov 2019 Diag: Jonathan Hester

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





## **OIL ANALYSIS REPORT**



ISO

# KAESER SFC1105 5945066 (S/N 1045)

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)



### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

## Contamination

There is a high amount of particulates present in the oil.

## **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Oct2018	Nov2019	Jan2021 Sep2021	Aug2022	
SAMPLE INFORM	<b>NOITAN</b>	method	limit/base	current	history 1	history 2
Sample Number				KC95233	KC99453	KC82952
Sample Date				23 Aug 2022	28 Sep 2021	06 Jan 2021
Machine Age	hrs			40865	33561	27285
Oil Age	hrs			5346	6276	8600
Oil Changed				Not Changd	Not Changd	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	9	11	7
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m		0	<1	0
Barium	ppm	ASTM D5185m	90	<1	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	0	<1	0
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus						
	ppm	ASTM D5185m		0	<1	4
Zinc	ppm	ASTM D5185m ASTM D5185m		0	<1 0	4 0
Zinc CONTAMINANTS	ppm		limit/base			
	ppm	ASTM D5185m		0	0	0
CONTAMINANTS	ppm	ASTM D5185m method		o current	0 history 1	0 history 2
CONTAMINANTS Silicon	ppm	ASTM D5185m  method  ASTM D5185m		current <1	0 history 1	0 history 2 <1
CONTAMINANTS Silicon Sodium	ppm ppm ppm	Method  ASTM D5185m  ASTM D5185m  ASTM D5185m	>25 >20	current <1 0	0 history 1 1 <1	history 2 <1 0
CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm	Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20 >0.05	0 current <1 0 0	0 history 1 1 <1 0	history 2 <1 0 0
CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	0 current <1 0 0 0 0.007	0 history 1 1 <1 0 0.007	history 2 <1 0 0 0 0 0 0.003
CONTAMINANTS Silicon Sodium Potassium Water ppm Water	ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304	>25 >20 >0.05 >500	0 current <1 0 0 0.007 70.6	0 history 1 1 <1 0 0.007 72.8	history 2 <1 0 0 0 0 0.003 31.9
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m  Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 method	>25 >20 >0.05 >500 limit/base	0 current <1 0 0 0.007 70.6 current 30350 ▲ 11156	0 history 1 1 <1 0 0.007 72.8 history 1	history 2 <1 0 0 0.003 31.9 history 2
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m  Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304  Method ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base	0 current <1 0 0 0 0.007 70.6 current 30350	0 history 1 1 <1 0 0.007 72.8 history 1 645	0 history 2 <1 0 0 0.003 31.9 history 2 3123
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base	0 current <1 0 0 0.007 70.6 current 30350 ▲ 11156	0 history 1 1 <1 0 0.007 72.8 history 1 645 154	history 2 <1 0 0 0.003 31.9 history 2 3123 835
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >14µm	ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m  Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304  Method ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >160	0 current <1 0 0 0.007 70.6 current 30350 ▲ 11156 ▲ 677	0 history 1 1 <1 0 0.007 72.8 history 1 645 154 6	history 2 <1 0 0 0.003 31.9 history 2 3123 835 39
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m MSTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >160 >40	0 current <1 0 0 0.007 70.6 current 30350 ▲ 11156 ▲ 677 ▲ 60	0 history 1  1 <1 0 0.007 72.8 history 1 645 154 6 0	history 2 <1 0 0 0 0.003 31.9 history 2 3123 835 39 9
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm ppm ppm ppm ppm	method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 ASTM D6304  method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >160 >40 >10	0 current <1 0 0 0.007 70.6 current 30350 △ 11156 △ 677 △ 60 3	0 history 1 1 <1 0 0.007 72.8 history 1 645 154 6 0 0	history 2 <1 0 0 0.003 31.9 history 2 3123 835 39 9 2

Acid Number (AN)

mg KOH/g ASTM D8045 0.4


0.418

0.40


0.443



## **OIL ANALYSIS REPORT**

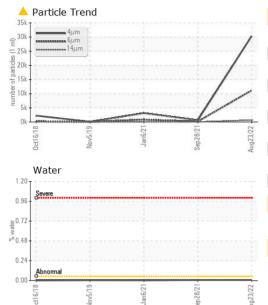

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
<b>Emulsified Water</b>	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	TES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	46	44.5	44.3	43.6
SAMPLE IMAGES	3	method	limit/base	current	history 1	history 2
Color						
Bottom						

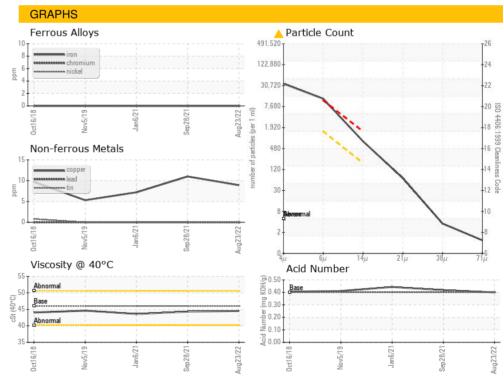





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** 

: KC95233

: 05629603 : 10114124 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 29 Aug 2022 Diagnosed : 30 Aug 2022

Diagnostician : Doug Bogart

**ALLIED MACHINE** 485 W 3RD ST

DOVER, OH USA 44662

Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: