

PROBLEM SUMMARY

,

Sample Rating Trend

ISO

ISO


8379922 (S/N 1332)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- QTS)

COMPONENT CONDITION SUMMARY

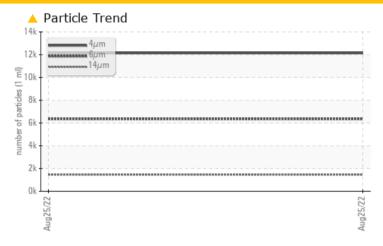

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS					
Sample Status			ABNORMAL		
Particles >6µm	ASTM D7647	>1300	△ 6358		
Particles >14µm	ASTM D7647	>80	1455		
Particles >21µm	ASTM D7647	>20	447		
Particles >38µm	ASTM D7647	>4	45		
Oil Cleanliness	ISO 4406 (c)	>/17/13	<u>^</u> 21/20/18		

Customer Id: PROGNA Sample No.: KC97082 Lab Number: 05629629 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDE	O ACTIONS			
Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



8379922 (S/N 1332)

Compressor

KAESER SIGMA (OEM) M-460 (--- QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Aug2022		
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number				KC97082		
Sample Date				25 Aug 2022		
Machine Age	hrs			3501		
Oil Age	hrs			3501		
Oil Changed				Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	<1		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	12		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	<1		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	100	26		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	2		
Zinc	ppm	ASTM D5185m	0	30		
CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		11		
Potassium	ppm	ASTM D5185m	>20	8		
Water	%	ASTM D6304	>0.05	0.020		
ppm Water	ppm	ASTM D6304	>500	207.1		
FLUID CLEANLIN	IESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647		12140		
Particles >6µm		ASTM D7647	>1300	6358		
Particles >14µm		ASTM D7647	>80	1455		
Particles >21µm		ASTM D7647	>20	447		
Particles >38µm		ASTM D7647	>4	45		
Particles >71µm		ASTM D7647	>3	2		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 21/20/18		
FLUID DEGRADA	TION	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.36		



OIL ANALYSIS REPORT

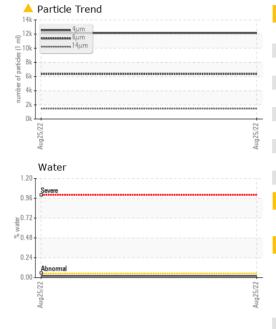

VISUAL		method	limit/base	current	history 1	history 2
VIOOAL		method	III III Dasc	Current	Thistory I	Thistory Z
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	LIGHT		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	TES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	45	44.3		
SAMPLE IMAGES	3	method	limit/base	current	history 1	history 2
Color					no image	no image

GRAPHS					
Ferrous Alloys	Particle Count				
iron					
- manananana nickel	122,880				
	30,720	100000000000000000000000000000000000000			
	7,680				
Aug25/22	Aug255/22 number of particles (per 1 ml) 120 –				
₹ Non-ferrous Metals	Auritcles (p				
	o o bad				
copper	- Jag 120 -				
seesessesses till	30				
	8 Bioresemal				
	2				
Aug25/22.	Aug25/22				
Viscosity @ 40°C	$^{4\mu}$ $_{6\mu}$ $^{14\mu}$ Acid Number	21μ 38μ 7			
Severe					
Abnormal	00 0.96 9				
Base Canada	1.20 Hy 0.96 E 0.72 hy 0.48 Hy 0.24				
Severe	N 0.24				
Aug25/22 + 5	Aug25/72 +				



Certificate L2367

Laboratory Sample No. Lab Number Unique Number : 10114150 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KC97082 : 05629629

Bottom

Received Diagnosed

: 29 Aug 2022 : 31 Aug 2022 Diagnostician : Don Baldridge

PROGRESSIVE FOAM 1 SOUTHERN GATEWAY DR GNADENHUTTEN, OH

USA 44629 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

no image

no image

T:

F: