


PROBLEM SUMMARY

Sample Rating Trend



ISO

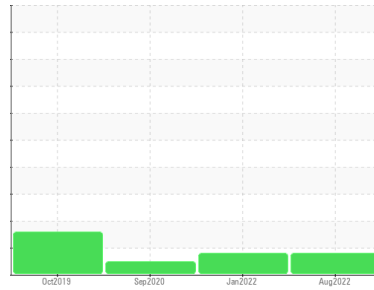


Machine Id
KAESER BSD 50 6523422 (S/N 1939)

Component
Compressor

Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

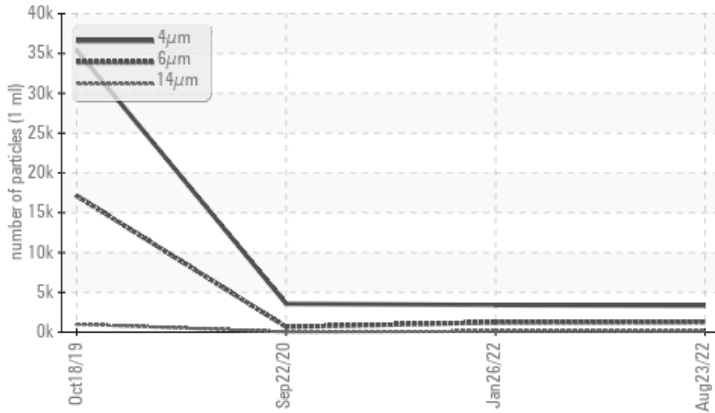

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status		ATTENTION	ATTENTION	NORMAL
Particles >14µm	ASTM D7647 >80	▲ 110	▲ 113	32
Oil Cleanliness	ISO 4406 (c) >--/17/13	▲ 19/17/14	▲ 17/14	17/12

Customer Id: NORCOT
Sample No.: KCP50562
Lab Number: 05629638
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

26 Jan 2022 Diag: Don Baldrige

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



22 Sep 2020 Diag: Angela Borella

NORMAL



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid.

view report



18 Oct 2019 Diag: Jonathan Hester

ISO




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



Machine Id
KAESER BSD 50 6523422 (S/N 1939)

Component
Compressor
Fluid
KAESER SIGMA (OEM) M-460 (--- GAL)

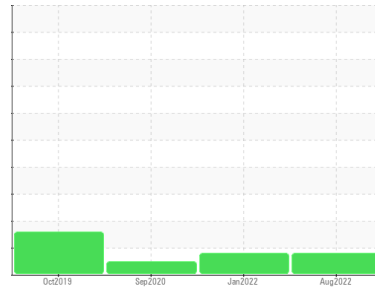

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number			KCP50562	KCP35091	KCP30338
Sample Date			23 Aug 2022	26 Jan 2022	22 Sep 2020
Machine Age	hrs		11735	9356	5621
Oil Age	hrs		2379	3592	2887
Oil Changed			Changed	Changed	Changed
Sample Status			ATTENTION	ATTENTION	NORMAL

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m	>50	<1	<1	<1
Chromium	ppm ASTM D5185m	>10	0	0	0
Nickel	ppm ASTM D5185m	>3	0	0	0
Titanium	ppm ASTM D5185m	>3	0	0	0
Silver	ppm ASTM D5185m	>2	0	0	<1
Aluminum	ppm ASTM D5185m	>10	2	2	0
Lead	ppm ASTM D5185m	>10	0	0	0
Copper	ppm ASTM D5185m	>50	11	8	3
Tin	ppm ASTM D5185m	>10	0	<1	<1
Antimony	ppm ASTM D5185m		---	0	0
Vanadium	ppm ASTM D5185m		0	0	0
Cadmium	ppm ASTM D5185m		0	0	<1

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m	0	0	<1	<1
Barium	ppm ASTM D5185m	90	<1	0	8
Molybdenum	ppm ASTM D5185m	0	0	0	0
Manganese	ppm ASTM D5185m		0	0	<1
Magnesium	ppm ASTM D5185m	100	0	2	42
Calcium	ppm ASTM D5185m	0	0	0	<1
Phosphorus	ppm ASTM D5185m	0	1	9	4
Zinc	ppm ASTM D5185m	0	<1	0	3
Sulfur	ppm ASTM D5185m	23500	17908	17026	17698

CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m	>25	<1	2	1
Sodium	ppm ASTM D5185m		1	1	16
Potassium	ppm ASTM D5185m	>20	0	<1	8
Water	% ASTM D6304	>0.05	0.013	0.008	0.026
ppm Water	ppm ASTM D6304	>500	138.6	85.9	269.3


FLUID CLEANLINESS

	method	limit/base	current	history 1	history 2
Particles >4µm	ASTM D7647		3330	3402	3564
Particles >6µm	ASTM D7647	>1300	1261	1232	656
Particles >14µm	ASTM D7647	>80	▲ 110	▲ 113	32
Particles >21µm	ASTM D7647	>20	15	▲ 27	9
Particles >38µm	ASTM D7647	>4	1	0	1
Particles >71µm	ASTM D7647	>3	0	0	0
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 19/17/14	▲ 17/14	17/12

FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g ASTM D8045	1.0	0.50	0.43	0.402


OIL ANALYSIS REPORT

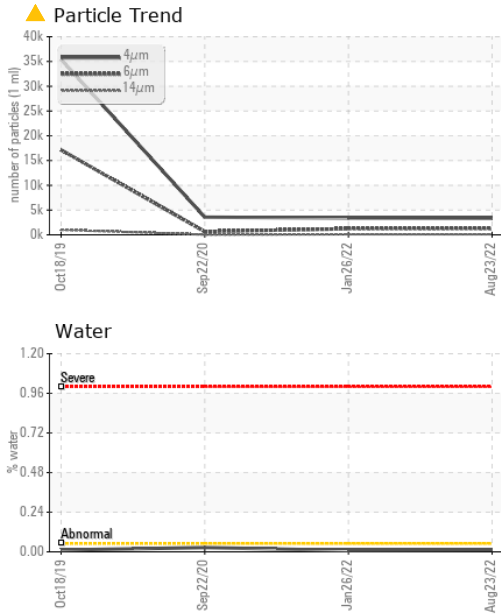


VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	45	50.3	49.9

SAMPLE IMAGES	method	limit/base	current	history 1	history 2
---------------	--------	------------	---------	-----------	-----------

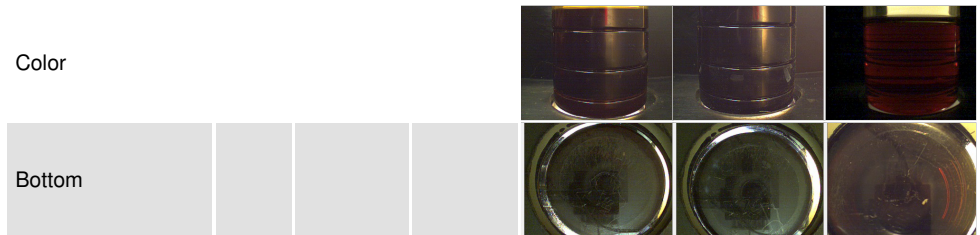

GRAPHS

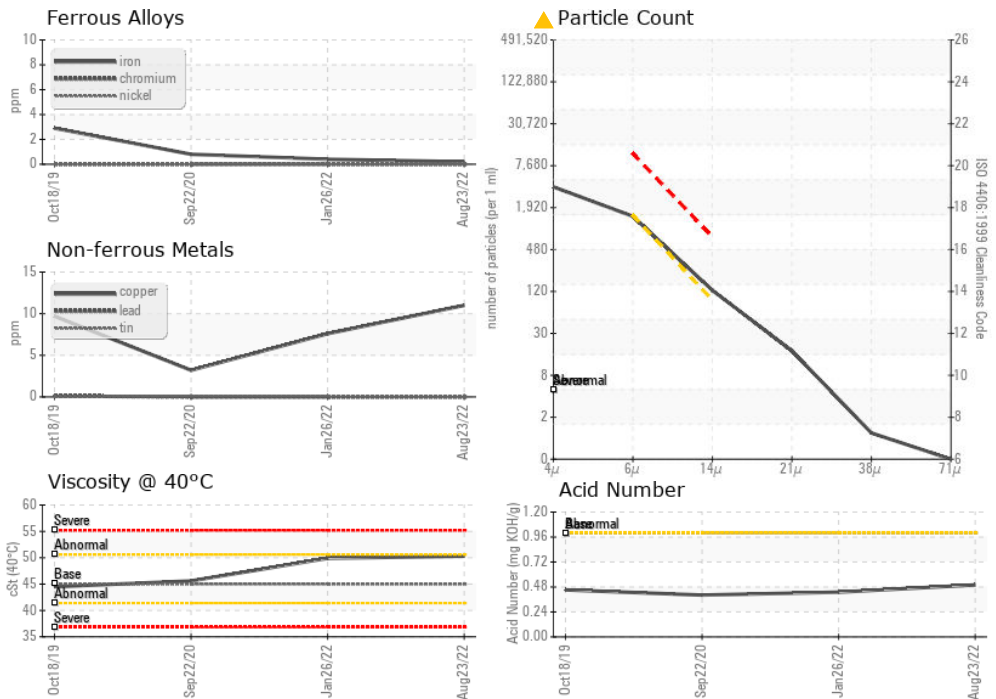

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCP50562 **Received** : 29 Aug 2022
Lab Number : 05629638 **Diagnosed** : 31 Aug 2022
Unique Number : 10114159 **Diagnostician** : Don Baldrige
Test Package : IND 2 (Additional Tests: KF, PrtCount)

NORTH STAR SHEETS
 7550 91ST ST S
 COTTAGE GROVE, MN
 USA 55016
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: