

PROBLEM SUMMARY




7374227 (S/N 1001)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

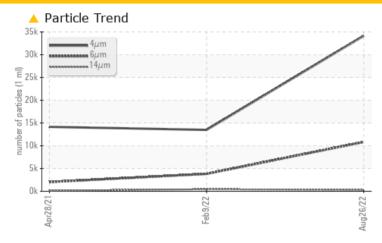

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS							
Sample Status			ABNORMAL	ABNORMAL	ATTENTION		
Particles >6µm	ASTM D7647	>1300	10835	▲ 3826	<u>^</u> 2028		
Particles >14μm	ASTM D7647	>80	4 305	447	<u> </u>		
Particles >21µm	ASTM D7647	>20	4 35	134	△ 36		
Oil Cleanliness	ISO 4406 (c)	>/17/13	22/21/15	<u> </u>	▲ 18/14		

Customer Id: CHEKNO Sample No.: KCP33328 Lab Number: 05629656 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

09 Feb 2022 Diag: Doug Bogart





Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



28 Apr 2021 Diag: Jonathan Hester

ISO




Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a moderate amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





OIL ANALYSIS REPORT

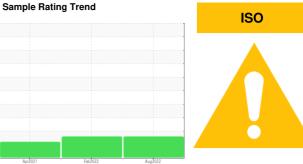

7374227 (S/N 1001)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		Ap	2021	Feb2022 Aug20	22	
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number				KCP33328	KCP41283	KCP31715
Sample Date				26 Aug 2022	09 Feb 2022	28 Apr 2021
Machine Age	hrs			9797	9038	4509
Oil Age	hrs			759	5529	4509
Oil Changed				Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ATTENTION
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	<1	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	<1
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>10	<1	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>50	<1	2	2
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m			0	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	0	0	2	<1
Barium	ppm	ASTM D5185m	90	13	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	100	74	59	55
Calcium	ppm	ASTM D5185m	0	<1	1	0
Phosphorus	ppm	ASTM D5185m	0	2	8	4
Zinc	ppm	ASTM D5185m	0	9	21	1
Sulfur	ppm	ASTM D5185m	23500	17688	16054	16434
CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	0	<1	0
Sodium	ppm	ASTM D5185m		11	21	17
Potassium	ppm	ASTM D5185m	>20	0	6	10
Water	%	ASTM D6304	>0.05	0.039	0.017	0.024
ppm Water	ppm	ASTM D6304	>500	391.7	179.1	249.8
FLUID CLEANLIN	IESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647		34153	13488	14162
Particles >6μm		ASTM D7647		<u> </u>	▲ 3826	▲ 2028
Particles >14μm		ASTM D7647	>80	4 305	<u>447</u>	<u>124</u>
Particles >21μm		ASTM D7647	>20	<u>▲</u> 35	<u>134</u>	▲ 36
Particles >38μm		ASTM D7647	>4	2	<u>^</u> 5	2
Particles >71μm		ASTM D7647		0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>22/21/15</u>	<u> </u>	<u>▲</u> 18/14
FLUID DEGRADA	TION	method	limit/base	current	history 1	history 2



OIL ANALYSIS REPORT

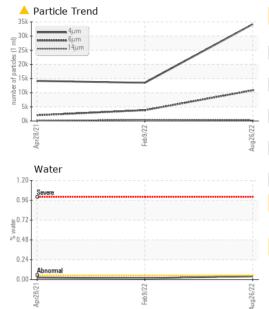

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERTIES		method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	45	46.3	46.7	43.9
SAMPLE IMAGES	S	method	limit/base	current	history 1	history 2
Color						
Bottom						

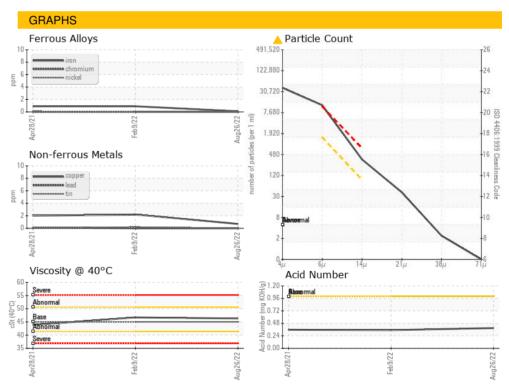





Laboratory Sample No. Lab Number Unique Number : 10114177

: KCP33328 : 05629656

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

Diagnosed Diagnostician : Don Baldridge

: 29 Aug 2022 : 31 Aug 2022

CHEP USA 1540 AMHERST RD KNOXVILLE, TN USA 37909 Contact: Service Manager

Test Package : IND 2 (Additional Tests: KF, PrtCount) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: