KAESER COMPRESSORS®
Built for a lifetime.

PROBLEM SUMMARY

Sample Rating Trend

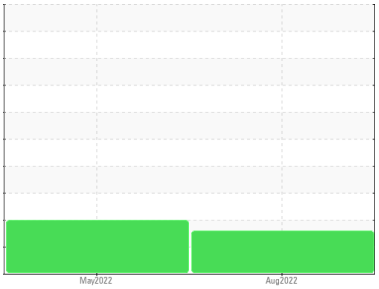

ISO

Machine Id
KAESER DSD 150 7873171 (S/N 3765)
Component
Compressor
Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

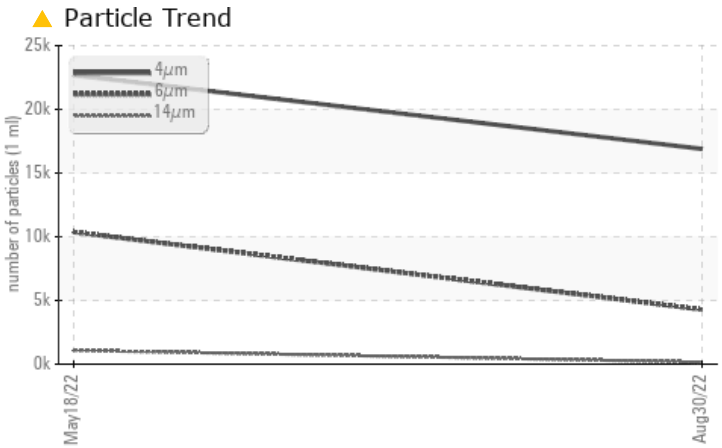

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				**ABNORMAL**	ABNORMAL	---
Particles >6µm		ASTM D7647	>1300	▲ **4284**	▲ 10360	---
Particles >14µm		ASTM D7647	>80	▲ **153**	▲ 1081	---
Particles >21µm		ASTM D7647	>20	▲ **29**	▲ 211	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ **21/19/14**	▲ 22/21/17	---

Customer Id: RUMCIN
Sample No.: KC107264
Lab Number: 05631288
Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldridge +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

18 May 2022 Diag: Don Baldridge

ISO

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report

KAESER COMPRESSORS
Built for a lifetime.

OIL ANALYSIS REPORT

Sample Rating Trend

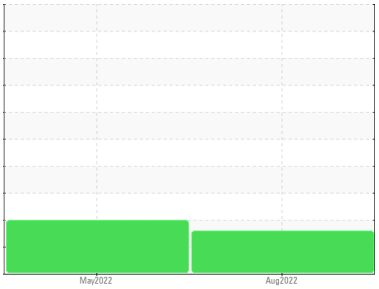

ISO

Machine Id
KAESER DSD 150 7873171 (S/N 3765)
Component
Compressor
Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation
No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear
All component wear rates are normal.

Contamination
There is a high amount of particulates present in the oil.

Fluid Condition
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history 1	history 2
Sample Number				**KC107264**	KC106111	---
Sample Date				**30 Aug 2022**	18 May 2022	---
Machine Age	hrs			**11996**	9802	---
Oil Age	hrs			**4087**	1893	---
Oil Changed				**Not Changd**	Not Changd	---
Sample Status				**ABNORMAL**	ABNORMAL	---

WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	**0**	0	---
Chromium	ppm	ASTM D5185m	>10	**0**	0	---
Nickel	ppm	ASTM D5185m	>3	**0**	0	---
Titanium	ppm	ASTM D5185m	>3	**0**	0	---
Silver	ppm	ASTM D5185m	>2	**<1**	<1	---
Aluminum	ppm	ASTM D5185m	>10	**<1**	2	---
Lead	ppm	ASTM D5185m	>10	**0**	0	---
Copper	ppm	ASTM D5185m	>50	**17**	4	---
Tin	ppm	ASTM D5185m	>10	**0**	<1	---
Vanadium	ppm	ASTM D5185m		**0**	0	---
Cadmium	ppm	ASTM D5185m		**0**	0	---

ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m		**0**	0	---
Barium	ppm	ASTM D5185m	90	**2**	0	---
Molybdenum	ppm	ASTM D5185m		**0**	0	---
Manganese	ppm	ASTM D5185m		**0**	0	---
Magnesium	ppm	ASTM D5185m	90	**0**	2	---
Calcium	ppm	ASTM D5185m	2	**0**	0	---
Phosphorus	ppm	ASTM D5185m		**1**	4	---
Zinc	ppm	ASTM D5185m		**0**	<1	---

CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	**0**	0	---
Sodium	ppm	ASTM D5185m		**0**	1	---
Potassium	ppm	ASTM D5185m	>20	**<1**	0	---
Water	%	ASTM D6304	>0.05	**0.007**	0.008	---
ppm Water	ppm	ASTM D6304	>500	**74.3**	86.9	---

FLUID CLEANLINESS		method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647		**16896**	22686	---
Particles >6µm		ASTM D7647	>1300	▲ **4284**	▲ 10360	---
Particles >14µm		ASTM D7647	>80	▲ **153**	▲ 1081	---
Particles >21µm		ASTM D7647	>20	▲ **29**	▲ 211	---
Particles >38µm		ASTM D7647	>4	**1**	▲ 8	---
Particles >71µm		ASTM D7647	>3	**0**	0	---
Oil Cleanliness		ISO 4406 (c)	>--/17/13	▲ **21/19/14**	▲ 22/21/17	---

FLUID DEGRADATION		method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	**0.41**	0.40	---

KAESER COMPRESSORS®
Built for a lifetime.

OIL ANALYSIS REPORT

Particle Trend

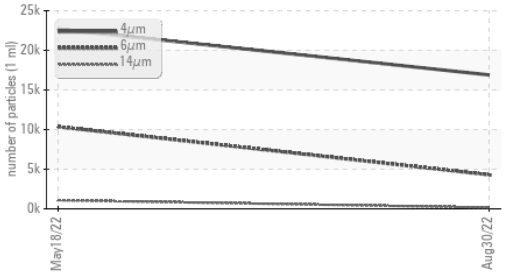

Water

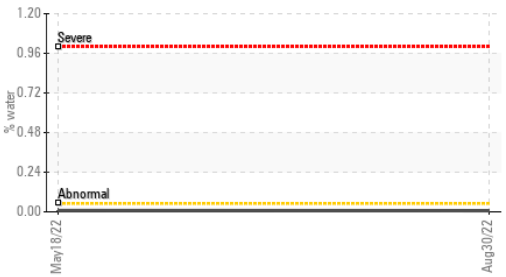

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	**NONE**	NONE	---
Yellow Metal	scalar	*Visual	NONE	**NONE**	NONE	---
Precipitate	scalar	*Visual	NONE	**NONE**	NONE	---
Silt	scalar	*Visual	NONE	**NONE**	NONE	---
Debris	scalar	*Visual	NONE	**NONE**	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	**NONE**	NONE	---
Appearance	scalar	*Visual	NORML	**NORML**	NORML	---
Odor	scalar	*Visual	NORML	**NORML**	NORML	---
Emulsified Water	scalar	*Visual	>0.05	**NEG**	NEG	---
Free Water	scalar	*Visual		**NEG**	NEG	---

FLUID PROPERTIES		method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	46	**44.6**	44.6	---

SAMPLE IMAGES	method	limit/base	current	history 1	history 2
Color					*no image*
Bottom					*no image*

GRAPHS

Ferrous Alloys

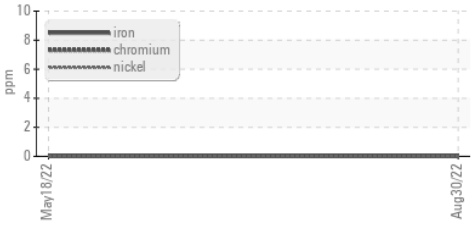

Non-ferrous Metals

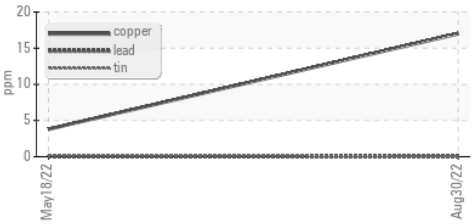

Viscosity @ 40°C

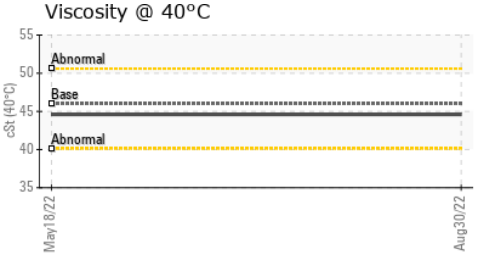

Particle Count

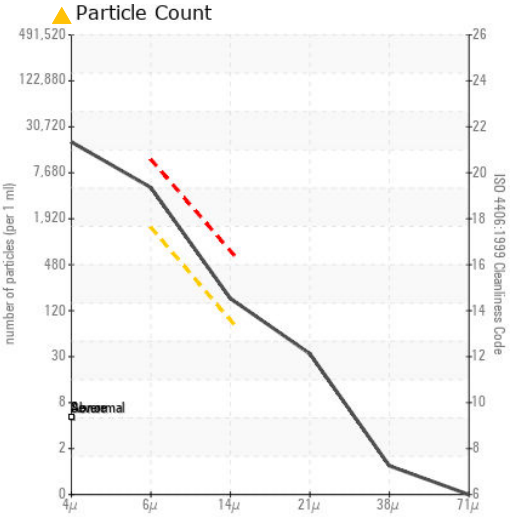

Acid Number

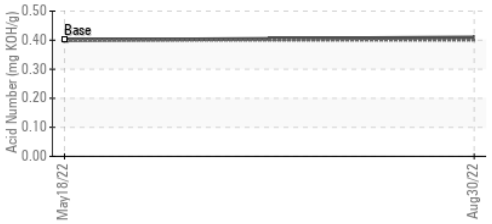

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC107264
Lab Number : 05631288
Unique Number : 10115809
Test Package : IND 2

Received : 31 Aug 2022
Diagnosed : 01 Sep 2022
Diagnostician : Don Baldridge

Certificate L2367

RUMPKE
10795 HUGHES ROAD
CINCINNATI, OH
USA 45251
Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: