

PROBLEM SUMMARY

Sample Rating Trend

ISO


KAESER 8067642

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

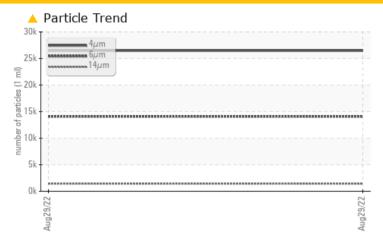

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

| PROBLEMATIC TEST RESULTS | | | | | | |
|--------------------------|--------------|---------|-----------------|--|--|--|
| Sample Status | | | ABNORMAL | | | |
| Particles >6µm | ASTM D7647 | >1300 | 14085 | | | |
| Particles >14µm | ASTM D7647 | >80 | 1432 | | | |
| Particles >21µm | ASTM D7647 | >20 | 227 | | | |
| Particles >38µm | ASTM D7647 | >4 | <u>^</u> 8 | | | |
| Oil Cleanliness | ISO 4406 (c) | >/17/13 | <u>22/21/18</u> | | | |

Customer Id: BUCMCA Sample No.: KCP37304 Lab Number: 05633650 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com


To change component or sample information: Gloria Gonzalez +1 (905)569-8600 x4643 gloria.gonzalez@wearcheck.com

| RECOMMENDED ACTIONS | | | | |
|---------------------|--------|------|---------|---|
| Action | Status | Date | Done By | Description |
| Change Fluid | | | ? | Oil and filter change at the time of sampling has been noted. |
| Change Filter | | | ? | Oil and filter change at the time of sampling has been noted. |

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

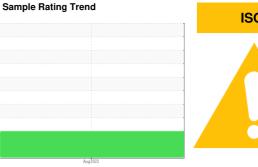

ISO

KAESER 8067642

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| | | | | Aug2022 | | |
|------------------|----------|--------------|------------|-----------------|-----------|-----------|
| SAMPLE INFORM | MATION | method | limit/base | current | history 1 | history 2 |
| Sample Number | | | | KCP37304 | | |
| Sample Date | | | | 29 Aug 2022 | | |
| Machine Age | hrs | | | 3129 | | |
| Oil Age | hrs | | | 3129 | | |
| Oil Changed | | | | Changed | | |
| Sample Status | | | | ABNORMAL | | |
| WEAR METALS | | method | limit/base | current | history 1 | history 2 |
| Iron | ppm | ASTM D5185m | >50 | <1 | | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | | |
| Nickel | ppm | ASTM D5185m | >3 | 0 | | |
| Titanium | ppm | ASTM D5185m | >3 | 0 | | |
| Silver | ppm | ASTM D5185m | >2 | <1 | | |
| Aluminum | ppm | ASTM D5185m | >10 | <1 | | |
| Lead | ppm | ASTM D5185m | >10 | <1 | | |
| Copper | ppm | ASTM D5185m | >50 | 14 | | |
| Tin | ppm | ASTM D5185m | >10 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | 0 | | |
| Cadmium | ppm | ASTM D5185m | | 0 | | |
| ADDITIVES | | method | limit/base | current | history 1 | history 2 |
| Boron | ppm | ASTM D5185m | 0 | 0 | | |
| Barium | ppm | ASTM D5185m | 90 | 2 | | |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | | |
| Manganese | ppm | ASTM D5185m | | <1 | | |
| Magnesium | ppm | ASTM D5185m | 100 | 28 | | |
| Calcium | ppm | ASTM D5185m | 0 | 0 | | |
| Phosphorus | ppm | ASTM D5185m | 0 | 4 | | |
| Zinc | ppm | ASTM D5185m | 0 | 34 | | |
| Sulfur | ppm | ASTM D5185m | 23500 | 17738 | | |
| CONTAMINANTS | 3 | method | limit/base | current | history 1 | history 2 |
| Silicon | ppm | ASTM D5185m | >25 | <1 | | |
| Sodium | ppm | ASTM D5185m | | 6 | | |
| Potassium | ppm | ASTM D5185m | >20 | 2 | | |
| Water | % | ASTM D6304 | >0.05 | 0.014 | | |
| ppm Water | ppm | ASTM D6304 | >500 | 145.0 | | |
| FLUID CLEANLIN | IESS | method | limit/base | current | history 1 | history 2 |
| Particles >4μm | | ASTM D7647 | | 26471 | | |
| Particles >6µm | | ASTM D7647 | >1300 | 14085 | | |
| Particles >14μm | | ASTM D7647 | >80 | 1432 | | |
| Particles >21µm | | ASTM D7647 | >20 | <u> </u> | | |
| Particles >38μm | | ASTM D7647 | >4 | <u>^</u> 8 | | |
| Particles >71μm | | ASTM D7647 | >3 | 1 | | |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | <u>22/21/18</u> | | |
| FLUID DEGRADA | ATION | method | limit/base | current | history 1 | history 2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 1.0 | 0.31 | | |



OIL ANALYSIS REPORT

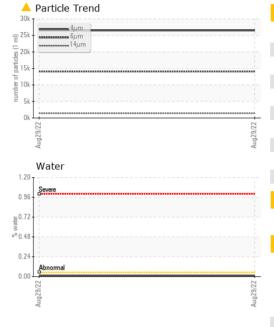

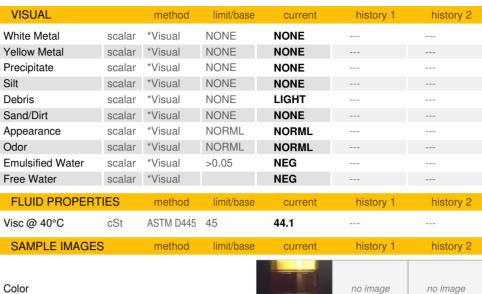

| GRAPHS | | |
|--|--|---|
| Ferrous Alloys | Particle Count | T ²⁶ |
| 8 - Front Chromium 6 - Front Chromium nickel | 122,880 | -24 |
| 2 | 30,720 | -22 |
| 0 2 | 7,680 | -20 ह |
| Aug29/22 | oze'r mi 076'r mi | -18 -16 -14 -14 -14 -14 -14 -14 -14 -14 -14 -14 |
| Non-ferrous Metals | Aug 29/22 Aug 29/22 1,920 120 120 120 120 120 120 120 | -16 |
| copper copper | 120- | -14 |
| 10 - accessoratin | 30+ | 12 |
| 5 | 8 Bibrese mal | 10 |
| Aug 29/22 4 | 2 - 2.762.9m | -8 |
| Viscosity @ 40°C | $\overset{4}{\overset{0}{\overset{4}{\mu}}}$ $\overset{6}{\overset{4}{\overset{\mu}}}$ $\overset{1}{\overset{4}{\overset{4}{\mu}}}$ $\overset{2}{\overset{1}{\overset{4}{\mu}}}$ Acid Number | 38μ 71 ⁶ μ |
| 60 Severe | 4.00 | |
| 50 Abnormal | Q 0.96 + 7 - 2 - 2 - 2 - 2 - 2 - 2 - 2 - 2 - 2 - | |
| Abnormal | 9 0.48 - | |
| Severe 35 | (8) 1.20 (9) 0.96 (10) 0.72 10) 0.48 10) 0.24 10) 0.24 | |
| Aug29/22 | Aug29/22 Aug29/22 | Aug 29/22 |
| Au | Au | Au |



Certificate L2367

Laboratory Sample No. Lab Number Unique Number

: 05633650 : 10118171

Bottom

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCP37304 Received : 02 Sep 2022 Diagnosed : 06 Sep 2022 Diagnostician : Doug Bogart

Test Package : IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

BUCK WILSON BODY SHOP

103 OKLAHOMA AVE MCALESTER, OK USA 74501

Contact: Service Manager

T: F:

no image

no image