


# PROBLEM SUMMARY

Sample Rating Trend



**VIS DEBRIS**

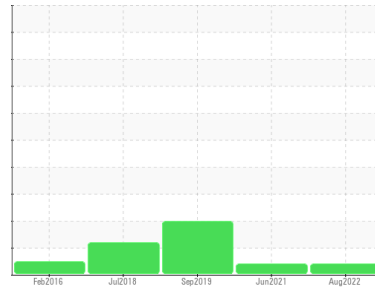

Machine Id  
**KAESER CSD 100 5390603 (S/N 1106)**  
Component  
**Compressor**  
Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

## COMPONENT CONDITION SUMMARY

No relevant graphs to display

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

## PROBLEMATIC TEST RESULTS

Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL
Debris	scalar	*Visual	NONE	<b>▲ MODER</b>	▲ MODER	LIGHT

**Customer Id:** CENEXT  
**Sample No.:** KCP51539  
**Lab Number:** 05635012  
**Test Package:** IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Alert	---	---	?	We were unable to perform a particle count due to a high concentration of particles present in this sample.

## HISTORICAL DIAGNOSIS

### 21 Jun 2021 Diag: Angela Borella

#### VIS DEBRIS



The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample. All component wear rates are normal. Moderate concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 26 Sep 2019 Diag: Jonathan Hester

#### ISO



No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

view report



### 25 Jul 2018 Diag: Doug Bogart

#### ISO



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


view report



Machine Id  
**KAESER CSD 100 5390603 (S/N 1106)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) S-460 (--- GAL)**

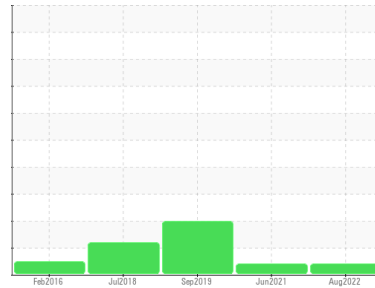

**DIAGNOSIS**

**▲ Recommendation**

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

**Wear**

All component wear rates are normal.

**▲ Contamination**

Moderate concentration of visible dirt/debris present in the oil.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

	method	limit/base	current	history 1	history 2
Sample Number			<b>KCP51539</b>	KCP32411	KC65827
Sample Date			<b>19 Aug 2022</b>	21 Jun 2021	26 Sep 2019
Machine Age	hrs		<b>22780</b>	18717	13593
Oil Age	hrs		<b>0</b>	2524	0
Oil Changed			<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

**WEAR METALS**

	method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m >50	<b>&lt;1</b>	<1	<1
Chromium	ppm	ASTM D5185m >10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m >3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>&lt;1</b>	1	1
Lead	ppm	ASTM D5185m >10	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >50	<b>21</b>	16	17
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	0
Antimony	ppm	ASTM D5185m	<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

**ADDITIVES**

	method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	<b>&lt;1</b>	12	<1
Barium	ppm	ASTM D5185m 90	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m 90	<b>5</b>	22	28
Calcium	ppm	ASTM D5185m 2	<b>0</b>	0	0
Phosphorus	ppm	ASTM D5185m	<b>4</b>	7	1
Zinc	ppm	ASTM D5185m	<b>9</b>	4	21
Sulfur	ppm	ASTM D5185m	<b>16141</b>	18048	13456

**CONTAMINANTS**

	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m >25	<b>0</b>	<1	<1
Sodium	ppm	ASTM D5185m	<b>4</b>	9	14
Potassium	ppm	ASTM D5185m >20	<b>0</b>	3	6
Water	%	ASTM D6304 >0.05	<b>0.012</b>	0.017	0.016
ppm Water	ppm	ASTM D6304 >500	<b>127.1</b>	177.4	163.4


**FLUID CLEANLINESS**

	method	limit/base	current	history 1	history 2
Particles >4µm	ASTM D7647		<b>---</b>	---	29178
Particles >6µm	ASTM D7647 >1300		<b>---</b>	---	▲ 14462
Particles >14µm	ASTM D7647 >80		<b>---</b>	---	▲ 2356
Particles >21µm	ASTM D7647 >20		<b>---</b>	---	▲ 722
Particles >38µm	ASTM D7647 >4		<b>---</b>	---	▲ 46
Particles >71µm	ASTM D7647 >3		<b>---</b>	---	▲ 3
Oil Cleanliness	ISO 4406 (c) >--/17/13		<b>---</b>	---	▲ 21/18

**FLUID DEGRADATION**

	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.4	<b>0.41</b>	0.341	0.342


# OIL ANALYSIS REPORT

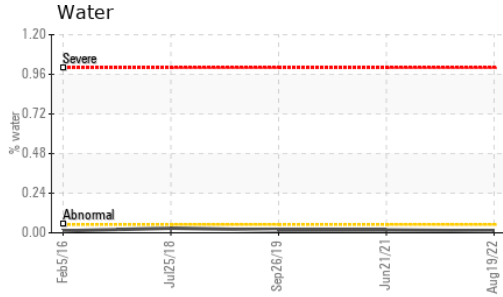





VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	▲ MODER	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	46	45.0	44.1

SAMPLE IMAGES	method	limit/base	current	history 1	history 2
---------------	--------	------------	---------	-----------	-----------

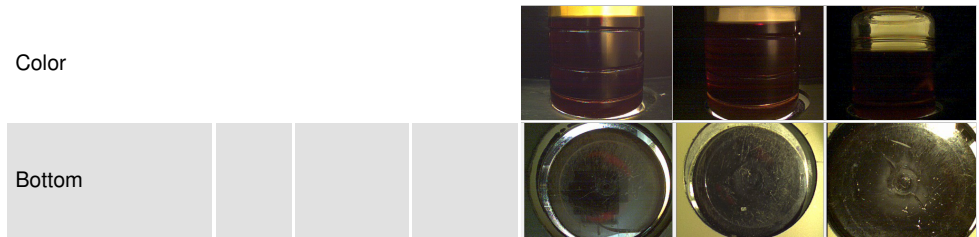

## GRAPHS

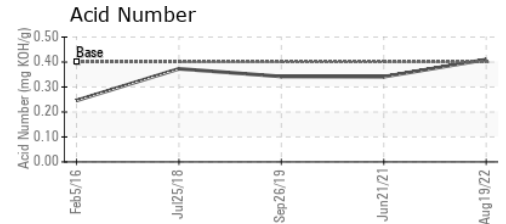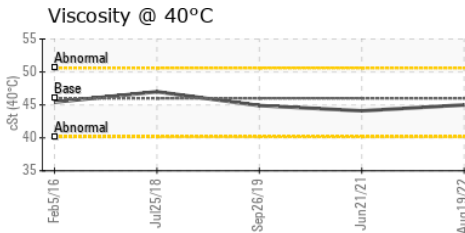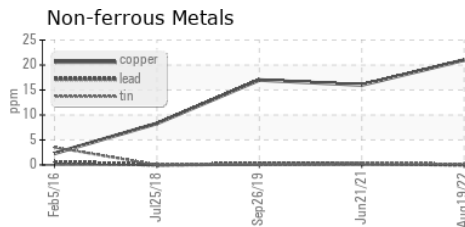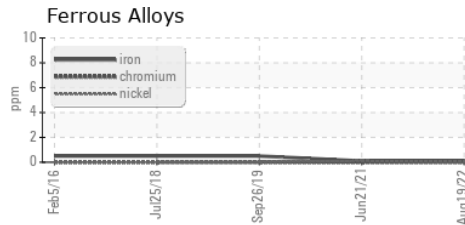

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCP51539 **Received** : 06 Sep 2022  
**Lab Number** : 05635012 **Diagnosed** : 08 Sep 2022  
**Unique Number** : 10124542 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**CENTURY CABINetry INC**  
 221 PHILLIPS RD  
 EXTON, PA  
 USA 19341  
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: