

PROBLEM SUMMARY

Sample Rating Trend

VIS DEBRIS

Machine Id

6584703 (S/N 1223)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

No relevant graphs to display

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

| PROBLEMATIC TEST RESULTS | | | | | | |
|--------------------------|--------|---------|------|----------|--------|----------|
| Sample Status | | | | ABNORMAL | NORMAL | ABNORMAL |
| Debris | scalar | *Visual | NONE | MODER | LIGHT | NONE |

Customer Id: VANWIL Sample No.: KCP48408 Lab Number: 05635059 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|--------|--------|------|---------|---|
| Alert | | | ? | We were unable to perform a particle count due to a high concentration of particles present in this sample. |

HISTORICAL DIAGNOSIS

18 Feb 2022 Diag: Jonathan Hester





Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



26 Aug 2020 Diag: Angela Borella

ISO




Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service





OIL ANALYSIS REPORT

Sample Rating Trend

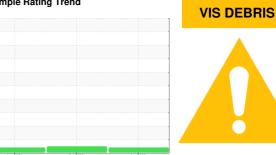

6584703 (S/N 1223)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


| | | Au | 2020 | Feb 2022 Aug 20 | 22 | |
|------------------|----------|----------------------|------------|-----------------|-------------|----------------|
| SAMPLE INFORM | MATION | method | limit/base | current | history 1 | history 2 |
| Sample Number | | | | KCP48408 | KCP35373 | KCP31063 |
| Sample Date | | | | 12 Aug 2022 | 18 Feb 2022 | 26 Aug 2020 |
| Machine Age | hrs | | | 15514 | 13435 | 7613 |
| Oil Age | hrs | | | 1076 | 2113 | 3100 |
| Oil Changed | 1110 | | | Not Changd | Not Changd | Changed |
| Sample Status | | | | ABNORMAL | NORMAL | ABNORMAL |
| · | | and the selection of | 1111-0 | | - | |
| WEAR METALS | | method | limit/base | current | history 1 | history 2 |
| Iron | ppm | ASTM D5185m | >50 | <1 | <1 | 0 |
| Chromium | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185m | >10 | <1 | <1 | 0 |
| Lead | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >50 | 22 | 5 | 3 |
| Tin | ppm | ASTM D5185m | >10 | 0 | 0 | 0 |
| Antimony | ppm | ASTM D5185m | | | | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| ADDITIVES | | method | limit/base | current | history 1 | history 2 |
| Boron | ppm | ASTM D5185m | 0 | <1 | <1 | <1 |
| Barium | ppm | ASTM D5185m | 90 | 20 | 12 | 6 |
| Molybdenum | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | 100 | 20 | 21 | 9 |
| Calcium | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Phosphorus | ppm | ASTM D5185m | 0 | 2 | 7 | 0 |
| Zinc | ppm | ASTM D5185m | 0 | 3 | 4 | 0 |
| Sulfur | ppm | ASTM D5185m | 23500 | 17080 | 20403 | 18775 |
| CONTAMINANTS | | method | limit/base | current | history 1 | history 2 |
| Silicon | ppm | ASTM D5185m | >25 | <1 | 2 | <1 |
| Sodium | ppm | ASTM D5185m | | 2 | <1 | 0 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | <1 | 0 |
| Water | % | ASTM D6304 | >0.05 | 0.014 | 0.008 | 0.004 |
| ppm Water | ppm | ASTM D6304 | >500 | 140.2 | 87.3 | 40.0 |
| FLUID CLEANLIN | IESS | method | limit/base | current | history 1 | history 2 |
| Particles >4µm | | ASTM D7647 | | | 2170 | 8498 |
| Particles >6µm | | ASTM D7647 | >1300 | | 488 | △ 2738 |
| Particles >14µm | | ASTM D7647 | >80 | | 51 | 55 |
| Particles >21µm | | ASTM D7647 | >20 | | 15 | 10 |
| Particles >38µm | | ASTM D7647 | >4 | | 1 | 1 |
| Particles >71µm | | ASTM D7647 | >3 | | 0 | 0 |
| Oil Cleanliness | | ISO 4406 (c) | >/17/13 | | 18/16/13 | △ 19/13 |
| FLUID DEGRADA | TION | method | limit/base | current | history 1 | history 2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | 1.0 | 0.39 | 0.40 | 0.377 |



OIL ANALYSIS REPORT

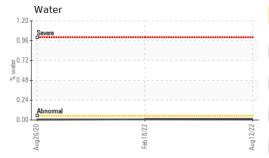

| VISUAL | | method | limit/base | current | history 1 | history 2 |
|-------------------------|--------|-----------|------------|---------|-----------|-----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | MODER | LIGHT | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |
| FLUID PROPERTIES | | method | limit/base | current | history 1 | history 2 |
| Visc @ 40°C | cSt | ASTM D445 | 45 | 48.7 | 51.7 | 47.5 |
| SAMPLE IMAGES | | method | limit/base | current | history 1 | history 2 |
| Color | | | | | | |
| Bottom | | | | | | |

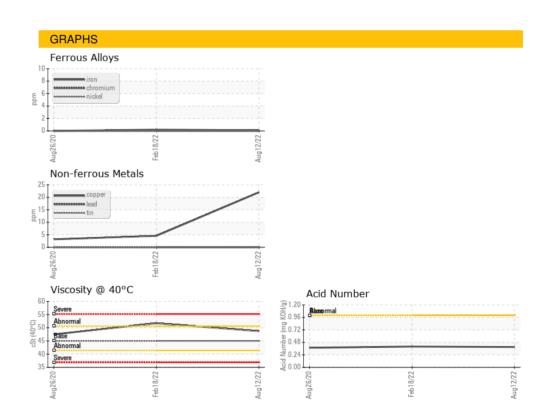





Certificate L2367

Laboratory Sample No. Lab Number Unique Number : 10124589

: KCP48408 : 05635059

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

Diagnosed

: 08 Sep 2022 Diagnostician : Don Baldridge

: 06 Sep 2022

Test Package : IND 2 (Additional Tests: KF, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

VANDERSLICE MACHINE CO

2557 WYANDOTTE RD WILLOW GROVE, PA

USA 19090

Contact: Service Manager

T: F: