

PROBLEM SUMMARY

Sample Rating Trend

ISO

A

Machine Id


KAESER SX 5 AIRCENTER 8445138 (S/N 1528)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

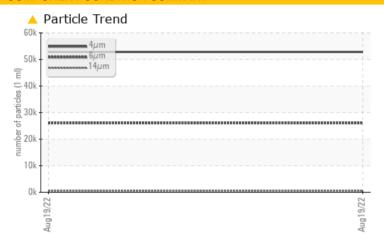

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS									
Sample Status			ABNORMAL						
Particles >6µm	ASTM D7647	>1300	26055						
Particles >14μm	ASTM D7647	>80	▲ 573						
Oil Cleanliness	ISO 4406 (c)	>/17/13	23/22/16						

Customer Id: CRAALL Sample No.: KC97357 Lab Number: 05636514 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS							
Action	Status	Date	Done By	Description			
Change Fluid			?	Oil and filter change at the time of sampling has been noted.			
Change Filter			?	Oil and filter change at the time of sampling has been noted.			

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

ISO

Machine Id

KAESER SX 5 AIRCENTER 8445138 (S/N 1528)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			,	Aug2022		
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number				KC97357		
Sample Date				19 Aug 2022		
Machine Age	hrs			2588		
Oil Age	hrs			2588		
Oil Changed	1110			Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	nnm	ASTM D5185m	>50	<1		
Chromium	ppm			0		
Nickel	ppm	ASTM D5185m	>10	-		
	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	<1		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	1		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	4		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	100	43		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	2		
Zinc	ppm	ASTM D5185m	0	0		
CONTAMINANTS	,	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m		11		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.05	0.024		
ppm Water	ppm	ASTM D6304	>500	243.0		
FLUID CLEANLIN	IESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647		52853		
Particles >6µm		ASTM D7647	>1300	<u>^</u> 26055		
Particles >14µm		ASTM D7647	>80	▲ 573		
Particles >21µm		ASTM D7647	>20	20		
Particles >38µm		ASTM D7647	>4	1		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	23/22/16		
FLUID DEGRADA	MOIT	method	limit/base	current	history 1	history 2
- LOID DEGRADA	TION	methou	mini/base	Current	HISTORY I	HISTORY 2


Acid Number (AN)


mg KOH/g ASTM D8045 1.0

0.33



OIL ANALYSIS REPORT

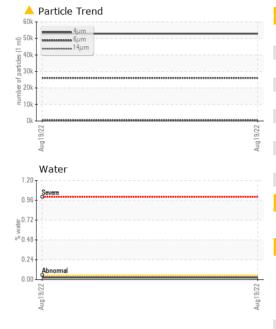

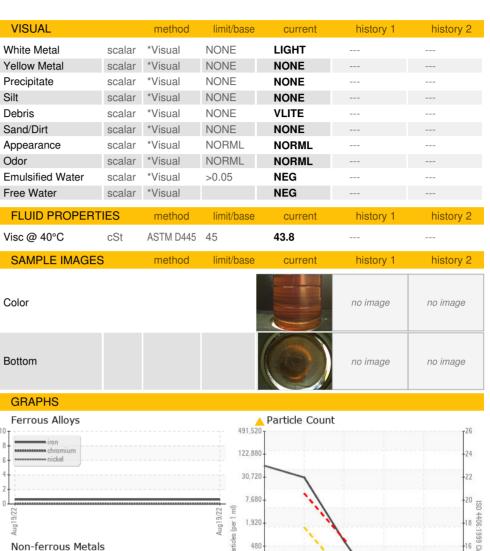

120

(B) 1.20 0.96 € 0.72

은 0.48

0.24 0.00 Acid Number





Certificate L2367

Laboratory Sample No. Lab Number Unique Number Test Package

: KC97357 . 05636514 : 10126044 : IND 2

ද්දු 45

40

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 08 Sep 2022 : 09 Sep 2022 Diagnosed

: Don Baldridge Diagnostician

CRAMER ARCHITECTURAL MILLWORK

7377 WILLIAM AVE. ALLENTOWN, PA USA 18106

Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Viscosity @ 40°C

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: