

PROBLEM SUMMARY

KAESER ASD 25 8070120 - 1154

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY



RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status		ABNORMAL	
Particles >6µm	ASTM D7647 >1300	<u> </u>	
Particles >14µm	ASTM D7647 >80	<u> </u>	
Particles >21µm	ASTM D7647 >20	<u> </u>	
Oil Cleanliness	ISO 4406 (c) >/17/13	<u> </u>	


Customer Id: SMOMAC Sample No.: KC93062 Lab Number: 05636543 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Don Baldridge +1 <u>don.b505@comcast.net</u>

To change component or sample information: Customer Service +1 1-800-237-1369 <u>customerservice@wearcheck.com</u>

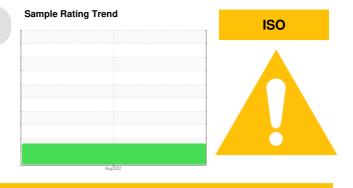

RECOMMENDED	ACTIONS			
Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Built for a lifetime.

Machine Id KAESER ASD 25 8070120 - 1154 Component

Compressor

Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		-				
				Aug2022		
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number				KC93062		
Sample Date				26 Aug 2022		
Machine Age	hrs			3082		
Oil Age	hrs			3082		
Oil Changed				Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	<1		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	4		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	100	40		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	2		
Zinc	ppm	ASTM D5185m	0	7		
CONTAMINANTS	6	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	5		
Sodium	ppm	ASTM D5185m		13		
Potassium	ppm	ASTM D5185m	>20	4		
Water	%	ASTM D6304	>0.05	0.015		
ppm Water	ppm	ASTM D6304	>500	157.5		
FLUID CLEANLIN	IESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647		24819		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	<u> </u>		
Particles >21µm		ASTM D7647	>20	<mark>/</mark> 23		
Particles >38µm		ASTM D7647	>4	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	A 22/20/15		
FLUID DEGRADA	ATION	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.34		


Sample Rating Trend

ISO



Built for a lifetime.

OIL ANALYSIS REPORT

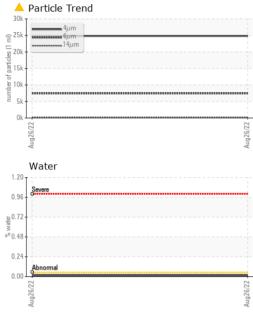

White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt	scalar scalar scalar	*Visual *Visual	NONE NONE	NONE NONE		
Precipitate Silt Debris	scalar			NONE		
Silt Debris		*\/:				
Debris		*Visual	NONE	NONE		
	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	LIGHT		
	scalar	*Visual	NONE	NONE		
Appearance Odor	scalar	*Visual	NORML	NORML		
	scalar	*Visual	NORML	NORML		
Emulsified Water Free Water	scalar	*Visual	>0.05	NEG NEG		
	scalar	*Visual				
FLUID PROPER		method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	45	44.1		
SAMPLE IMAGE	ES	method	limit/base	current	history 1	history 2
Color					no image	no image
Bottom					no image	no image
GRAPHS						
Ferrous Alloys				Particle Count		
10 iron			491,520	I		T ²⁶
6 - management of the second s			122,880			-24
			20.700			
2			30,720			-22
0			7,680	1		-20
4ug 26/22			Aug26/22 s (per 1 ml)	N.		18
Aug			Aug.	. /		10
Non-ferrous Met	als		Potuned 480		<	+16
10 copper			Aug26/22 Aug26/22 10er 1 ml)	-	1	+20 +18 +16 +14
					. /	-12
			30			+12
2-			8	Seree mal		-10
				I		8
Aug26/22			Aug26/22			
	_		NY 04	μ 6μ	14µ 21µ	38µ 71µ
Viscosity @ 40°C	.			Acid Number	anant to potto	antas 83353
55 - Severe			(B) 1.20	Basermal		
			Ê 0.72			
G 50 - S 50 - S 45 - Base Abnormal						
40			(B) 1.20 (B) 1.20 (B) 0.96 (C) 1.0 (C) 1.20 (C)			
35 Severe			. 0.00	5		,
Aug26/22			Aug26/22	Aug26/22		
Aur			Au	Au		
pratory : WearCheck USA - ple No. : KC93062 Number : 05636543 ue Number : 10126073 Package : IND 2	- 501 Madis Received Diagnose Diagnost	d : 08 \$ ed : 09 \$	ry, NC 27513 Sep 2022 Sep 2022 n Baldridge		5600 LOWER M M	SMOOTH-O MACUNGIE R MACUNGIE, P USA 1806 Contact

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: ? ? - SMOMAC

Page 4 of 4