

# **PROBLEM SUMMARY**

Sample Rating Trend




KAESER 6933442

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

## COMPONENT CONDITION SUMMARY

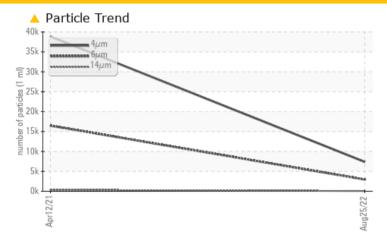

### RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TE	EST RESULTS				
Sample Status			ABNORMAL	ABNORMAL	
Particles >6µm	ASTM D7647	>1300	<b>2948</b>	<u>16486</u>	
Oil Cleanliness	ISO 4406 (c)	>/17/13	A 20/19/13	A 21/16	

Customer Id: TWORED Sample No.: KC90369 Lab Number: 05636570 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Fluid			?	Oil and filter change at the time of sampling has been noted.		
Change Filter			?	Oil and filter change at the time of sampling has been noted.		

## HISTORICAL DIAGNOSIS

## 12 Apr 2021 Diag: Don Baldridge

ISO



No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





# **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO

**KAESER 6933442** Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

# **DIAGNOSIS**

### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

## Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Apr2021	Aug2022	<u> </u>	
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number				KC90369	KC74905	
Sample Date				25 Aug 2022	12 Apr 2021	
Machine Age	hrs			2104	611	
Oil Age	hrs			1493	611	
Oil Changed				Changed	Changed	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	<1	<1	
Lead	ppm	ASTM D5185m	>10	0	<1	
Copper	ppm	ASTM D5185m	>50	1	2	
Tin	ppm	ASTM D5185m	>10	0	<1	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m		0	9	
Barium	ppm	ASTM D5185m	90	10	12	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		0	<1	
Magnesium	ppm	ASTM D5185m	90	71	74	
Calcium	ppm	ASTM D5185m	2	0	<1	
Phosphorus	nnm			_		
	ppm	ASTM D5185m		1	8	
Zinc	ppm	ASTM D5185m ASTM D5185m		1 2	8	
Zinc CONTAMINANTS	ppm		limit/base			
	ppm	ASTM D5185m	limit/base >25	2	4	
CONTAMINANTS	ppm	ASTM D5185m method		2 current	4 history 1	history 2
CONTAMINANTS Silicon	ppm	ASTM D5185m  method  ASTM D5185m		current 0	4 history 1 0	history 2
CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm	ASTM D5185m  method  ASTM D5185m  ASTM D5185m	>25 >20	current 0 17	4 history 1 0 11	history 2
CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm	Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	>25 >20	2 current 0 17 0	4 history 1 0 11 < 1	history 2
CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm ppm ppm ppm	Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304	>25 >20 >0.05	2 current 0 17 0 0.022	4 history 1 0 11 <1 0.019	history 2
CONTAMINANTS Silicon Sodium Potassium Water ppm Water	ppm ppm ppm ppm ppm ppm	ASTM D5185m  method  ASTM D5185m  ASTM D5185m  ASTM D5185m  ASTM D6304  ASTM D6304	>25 >20 >0.05 >500	2 current 0 17 0 0.022 225.5	4 history 1 0 11 <1 0.019 193.6	history 2
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm ppm ppm ppm	ASTM D5185m  method  ASTM D5185m  ASTM D5185m  ASTM D5185m  ASTM D6304  ASTM D6304  method	>25 >20 >0.05 >500 limit/base	2	4 history 1 0 11 <1 0.019 193.6 history 1	history 2 history 2
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm ppm ppm	ASTM D5185m  method  ASTM D5185m  ASTM D5185m  ASTM D5185m  ASTM D6304  ASTM D6304  method  ASTM D7647	>25 >20 >0.05 >500 limit/base	2	4 history 1 0 11 <1 0.019 193.6 history 1 38845	history 2 history 2 history 2
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm ppm	ASTM D5185m  method  ASTM D5185m  ASTM D5185m  ASTM D5185m  ASTM D6304  ASTM D6304  method  ASTM D7647  ASTM D7647	>25 >20 >0.05 >500 limit/base	2 current 0 17 0 0.022 225.5 current 7375  2948	4  history 1  0 11 <1 0.019 193.6  history 1  38845  ▲ 16486	history 2 history 2 history 2
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm	ppm ppm ppm ppm ppm ppm	Method ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D6304 ASTM D6304 Method ASTM D7647 ASTM D7647 ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80	2	4  history 1  0 11 <1 0.019 193.6  history 1  38845  ▲ 16486  ▲ 352	history 2 history 2
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm ppm	Method  ASTM D5185m  method  ASTM D5185m  ASTM D5185m  ASTM D6304  ASTM D6304  Method  ASTM D7647  ASTM D7647  ASTM D7647  ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20	2	4  history 1  0 11 <1 0.019 193.6  history 1  38845  △ 16486  △ 352  △ 57	history 2 history 2
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm	ppm ppm ppm ppm ppm ppm	Method  ASTM D5185m  Method  ASTM D5185m  ASTM D5185m  ASTM D6304  ASTM D6304  Method  ASTM D7647  ASTM D7647  ASTM D7647  ASTM D7647  ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4	2 current 0 17 0 0.022 225.5 current 7375 2948 51 7 0	4  history 1  0 11 <1 0.019 193.6  history 1  38845  △ 16486  △ 352  △ 57 3	history 2 history 2
CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm Particles >14µm Particles >21µm Particles >38µm Particles >71µm	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m  method  ASTM D5185m  ASTM D5185m  ASTM D5185m  ASTM D6304  ASTM D6304  method  ASTM D7647  ASTM D7647  ASTM D7647  ASTM D7647  ASTM D7647  ASTM D7647  ASTM D7647	>25 >20 >0.05 >500 limit/base >1300 >80 >20 >4 >3	2 current 0 17 0 0.022 225.5 current 7375 2948 51 7 0	4  history 1  0 11 <1 0.019 193.6  history 1 38845  ▲ 16486 ▲ 352  ▲ 57 3 0	history 2 history 2 history 2

Acid Number (AN)


mg KOH/g ASTM D8045 0.4


0.347

0.39



# **OIL ANALYSIS REPORT**

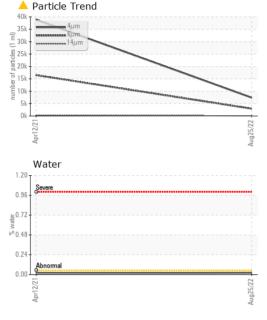

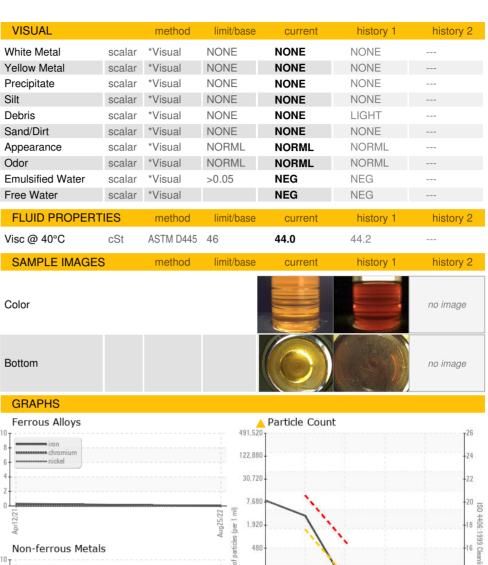

120

0.50 0.40 0.40 E 0.30 흩 0.20 0.10 0.00

Acid Number





Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** 

Test Package : IND 2

: KC90369 : 05636570 : 10126100

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

Viscosity @ 40°C

Diagnosed Diagnostician

: 08 Sep 2022 : 12 Sep 2022 : Don Baldridge TWO RIVER THEATRE 21 BRIDGE AVE RED BANK, NJ

USA 07701

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: