

PROBLEM SUMMARY

KAESER 5530462


Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

Sample Rating Trend ISO

COMPONENT CONDITION SUMMARY

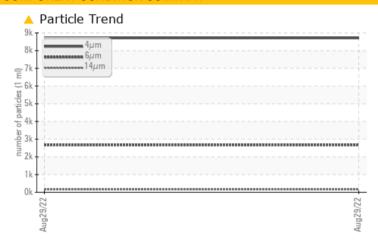

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS					
Sample Status			ABNORMAL		
Particles >6µm	ASTM D7647	>1300	^ 2669		
Particles >14µm	ASTM D7647	>80	158		
Oil Cleanliness	ISO 4406 (c)	>/17/13	20/19/14		

Customer Id: LAKKEL Sample No.: KCP28751 Lab Number: 05636579 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED	ACTIONS			
Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS




OIL ANALYSIS REPORT

KAESER 5530462

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

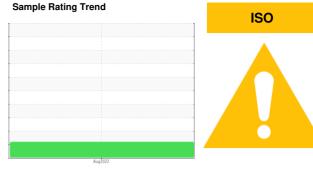

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Aug ² 022		
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number				KCP28751		
Sample Date				29 Aug 2022		
Machine Age	hrs			10104		
Oil Age	hrs			3834		
Oil Changed				Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	<1		
Aluminum	ppm	ASTM D5185m	>10	1		
Lead	ppm	ASTM D5185m	>10	<1		
Copper	ppm	ASTM D5185m	>50	4		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES	la la	method	limit/base		history 1	hiotom. O
				current	history 1	history 2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	8		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	100	29		
Calcium	ppm	ASTM D5185m	0	<1		
Phosphorus	ppm	ASTM D5185m	0	0		
Zinc	ppm	ASTM D5185m	0	9		
Sulfur	ppm	ASTM D5185m	23500	20620		
CONTAMINANTS)	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	3		
Sodium	ppm	ASTM D5185m		6		
Potassium	ppm	ASTM D5185m	>20	2		
Water	%	ASTM D6304	>0.05	0.005		
ppm Water	ppm	ASTM D6304	>500	51.0		
FLUID CLEANLIN	IESS	method	limit/base	current	history 1	history 2
Particles >4μm		ASTM D7647		8709		
Particles >6µm		ASTM D7647	>1300	<u>^</u> 2669		
Particles >14μm		ASTM D7647	>80	<u> </u>		
Particles >21µm		ASTM D7647	>20	18		
Particles >38µm		ASTM D7647	>4	1		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	20/19/14		
FLUID DEGRADA	TION	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.39		



OIL ANALYSIS REPORT

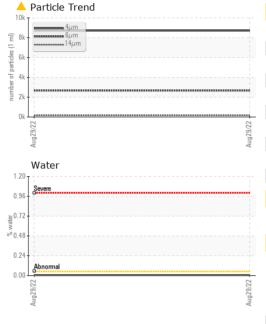

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	IES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	45	46.7		
SAMPLE IMAGES	3	method	limit/base	current	history 1	history 2

GRAPHS					
Ferrous Alloys	Particle Count				
iron Iron					
- nonnonnonn nickel	122,880	+2			
	30,720	+2			
	7,680	-2			
Aug29,722	Aug29/22 Aug29/22 100 100 100 100 100 100 100	+1			
Non-ferrous Metals	19 480 480				
copper	120-	1			
- enconnection fill	30	1			
	8 Bibroemal	-1			
722	2-	\			
Aug29/22	Aug29/22				
Viscosity @ 40°C	Acid Number $^{4\mu}$ $^{6\mu}$ $^{14\mu}$ $^{21\mu}$	38μ 71μ			
Severe	1.20 Basemal				
Abnormal Base Abnormal	<u> </u>				
Abhomia	9 0.48 -				
Severe	S 1.20				
Aug29/22	Aug29/22 Aug29/22				
Aug	Aug				



Certificate L2367

Laboratory Sample No. Lab Number Unique Number : 10126109

: 05636579

Color

Bottom

: KCP28751

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received Diagnosed

: 08 Sep 2022 : 09 Sep 2022 Diagnostician : Don Baldridge

Test Package: IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LAKE COUNTY SPECIAL DISTRICTS

no image

no image

no image

no image

6570 BERGESEN DR KELSEYVILLE, CA

USA 95451

Contact: Service Manager

T: F: