

PROBLEM SUMMARY

Sample Rating Trend




ISO



Machine Id
1183
Component
Compressor
Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Particle Trend

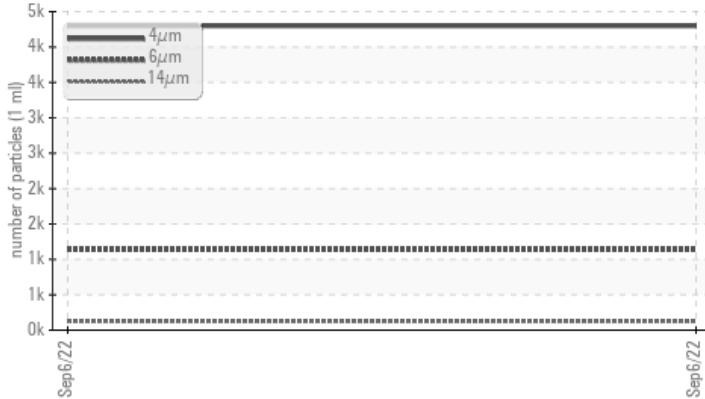

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status			ATTENTION	---	---
Particles >14µm	ASTM D7647	>80	▲ 123	---	---
Particles >21µm	ASTM D7647	>20	▲ 39	---	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 19/17/14	---	---

Customer Id: CENDELKC
Sample No.: KC85964
Lab Number: 05641005
Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:
Angela Borella +1 800-237-1369
angela.borella@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS

OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id
1183
Component
Compressor
Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

▲ Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history 1	history 2
Sample Number			KC85964	---	---
Sample Date			06 Sep 2022	---	---
Machine Age	hrs		16087	---	---
Oil Age	hrs		0	---	---
Oil Changed			Changed	---	---
Sample Status			ATTENTION	---	---

WEAR METALS

	method	limit/base	current	history 1	history 2
Iron	ppm ASTM D5185m	>50	<1	---	---
Chromium	ppm ASTM D5185m	>10	0	---	---
Nickel	ppm ASTM D5185m	>3	0	---	---
Titanium	ppm ASTM D5185m	>3	0	---	---
Silver	ppm ASTM D5185m	>2	0	---	---
Aluminum	ppm ASTM D5185m	>10	4	---	---
Lead	ppm ASTM D5185m	>10	0	---	---
Copper	ppm ASTM D5185m	>50	5	---	---
Tin	ppm ASTM D5185m	>10	0	---	---
Vanadium	ppm ASTM D5185m		0	---	---
Cadmium	ppm ASTM D5185m		0	---	---

ADDITIVES

	method	limit/base	current	history 1	history 2
Boron	ppm ASTM D5185m		0	---	---
Barium	ppm ASTM D5185m	90	<1	---	---
Molybdenum	ppm ASTM D5185m		0	---	---
Manganese	ppm ASTM D5185m		<1	---	---
Magnesium	ppm ASTM D5185m	90	29	---	---
Calcium	ppm ASTM D5185m	2	<1	---	---
Phosphorus	ppm ASTM D5185m		36	---	---
Zinc	ppm ASTM D5185m		139	---	---

CONTAMINANTS

	method	limit/base	current	history 1	history 2
Silicon	ppm ASTM D5185m	>25	<1	---	---
Sodium	ppm ASTM D5185m		10	---	---
Potassium	ppm ASTM D5185m	>20	2	---	---
Water	% ASTM D6304	>0.05	0.040	---	---
ppm Water	ppm ASTM D6304	>500	406.9	---	---


FLUID CLEANLINESS

	method	limit/base	current	history 1	history 2
Particles >4µm	ASTM D7647		4298	---	---
Particles >6µm	ASTM D7647	>1300	1136	---	---
Particles >14µm	ASTM D7647	>80	▲ 123	---	---
Particles >21µm	ASTM D7647	>20	▲ 39	---	---
Particles >38µm	ASTM D7647	>4	5	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ 19/17/14	---	---

FLUID DEGRADATION

	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g ASTM D8045	0.4	0.35	---	---

OIL ANALYSIS REPORT

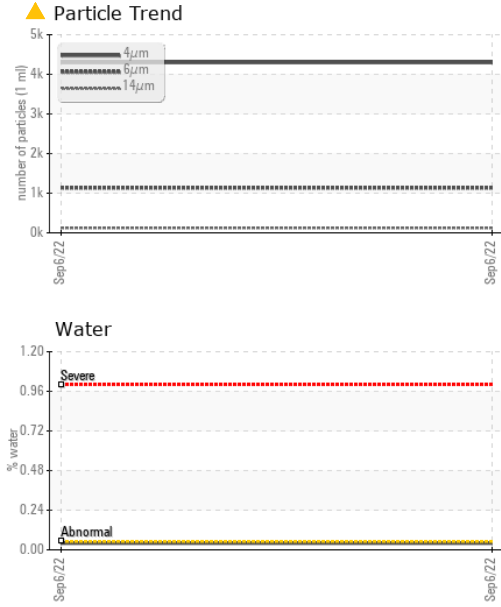






VISUAL	method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	46	44.8	---

SAMPLE IMAGES	method	limit/base	current	history 1	history 2
---------------	--------	------------	---------	-----------	-----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

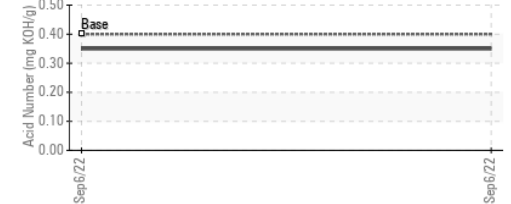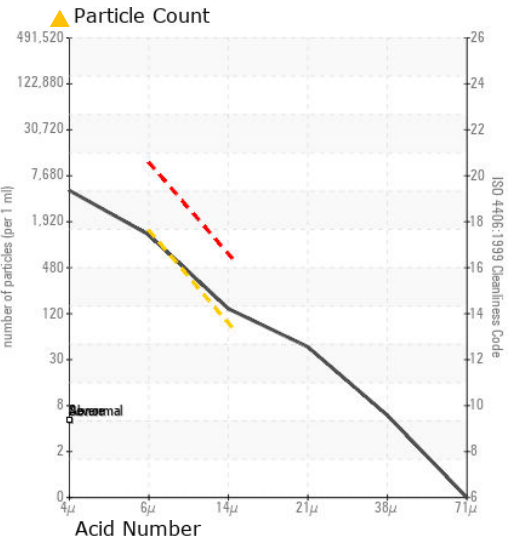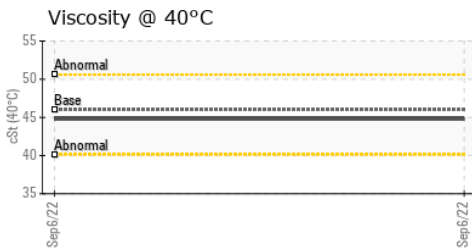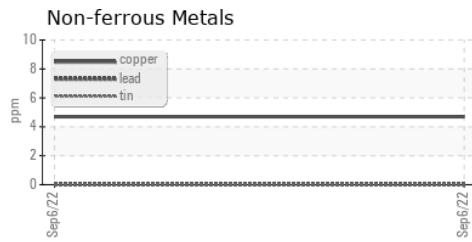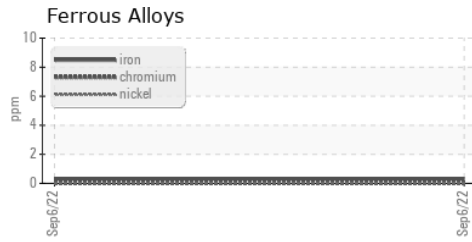

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC85964 **Received** : 14 Sep 2022
Lab Number : 05641005 **Diagnosed** : 15 Sep 2022
Unique Number : 10130535 **Diagnostician** : Angela Borella
Test Package : IND 2

CENTRALI MARBLE
 800 SW 17TH AVE
 DELRAY BEACH, FL
 USA 33444
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: