

PROBLEM SUMMARY

Sample Rating Trend

ISO


Machine Id **8221093 (S/N 2151)**

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

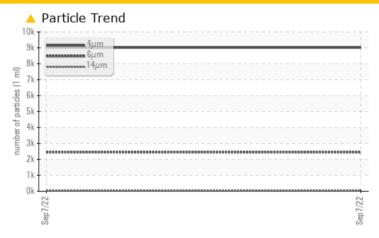

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC T	EST RESULTS			
Sample Status			ATTENTION	
Particles >6µm	ASTM D7647	>1300	4 2457	
Oil Cleanliness	ISO 4406 (c)	>/17/13	A 20/18/13	

Customer Id: TRAMENKC Sample No.: KC94957 Lab Number: 05641616 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Angela Borella +1 800-237-1369 angela.borella@wearcheckusa.com


To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDE	RECOMMENDED ACTIONS					
Action	Status	Date	Done By	Description		
Change Fluid			?	Oil and filter change at the time of sampling has been noted.		
Change Filter			?	Oil and filter change at the time of sampling has been noted.		

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

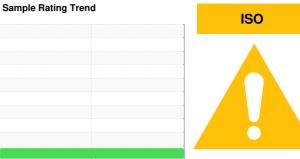

Machine Id

8221093 (S/N 2151)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


Fluid Condition

The condition of the oil is acceptable for the time in service.

				Sep2022		
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
	717 (11014	metrioa	III III Dasc	KC94957		
Sample Number				07 Sep 2022		
Sample Date	hrs			2247		
Machine Age Oil Age	hrs			2247		
Oil Changed	1113			Changed		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	12 In 112	ASTM D5185m	>50			
Chromium	ppm		>10	<1 0		
Nickel	ppm	ASTM D5185m ASTM D5185m	>10	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm		>10	υ <1		
Lead	ppm	ASTM D5185m	>10	0		
	ppm		>50	7		
Copper Tin	ppm	ASTM D5185m	>50	<1		
Vanadium		ASTM D5185m	>10	0		
Cadmium	ppm	ASTM D5185m		0		
	ррпп					
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	13		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	100	53		
Calcium	ppm	ASTM D5185m	0	2		
Phosphorus	ppm	ASTM D5185m	0	3		
Zinc	ppm	ASTM D5185m	0	7		
CONTAMINANTS	5	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		12		
Potassium	ppm	ASTM D5185m	>20	11		
Water	%	ASTM D6304	>0.05	0.013		
ppm Water	ppm	ASTM D6304	>500	135.8		
FLUID CLEANLIN	IESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647		9014		
Particles >6μm		ASTM D7647	>1300	<u>^</u> 2457		
Particles >14µm		ASTM D7647	>80	46		
Particles >21µm		ASTM D7647	>20	6		
Particles >38µm		ASTM D7647	>4	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 20/18/13		
FLUID DEGRADA	ATION	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.32		



OIL ANALYSIS REPORT

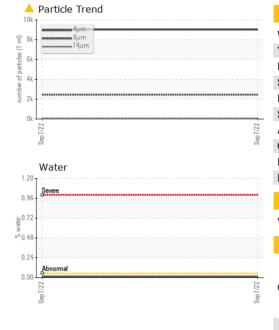

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	IES	method	limit/base	current	history 1	history 2
					, i	
Visc @ 40°C	cSt	ASTM D445	45	45.5		
SAMPLE IMAGES	;	method	limit/base	current	history 1	history 2

Color			no image	no image
Bottom			no image	no image
GRAPHS				

GRAPHS		
Ferrous Alloys	▲ Particle Count	
	491,520	
Iron Iron	122,880	
wasanananan NICKE		
	30,720	
	7,680	
Sep 7/22	25/122 (per 1 m)	
	Se (p. Se)	
Non-ferrous Metals	480	
copper	22/Lebs 2 1,920 - 480 - 480 - 120 -	
ensurence (II)	30	
		\
	8 Serce mal	
Sep7/22	2-2/2 2-	
day	η	
Viscosity @ 40°C	4μ 6μ 14μ Acid Number	21μ 38μ 7
Severe		
Abnormal	0.96 P	
Base	= U.72 = 0.48	
Abnormal	1.20 Hy 0.96 Bhoomal 0.00 0.72 + 0.46 0.46 0.46 0.46 0.46 0.46 0.46 0.46 0.	
Severe C	0.00 Pg	
Sep7/22	Sep7/22 Sep7/22	





Certificate L2367

Laboratory Sample No. Lab Number

Unique Number : 10131146

: KC94957 : 05641616 Test Package : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received Diagnosed

: 14 Sep 2022 : 15 Sep 2022 Diagnostician : Angela Borella TRAILER COMPONENTS 9049 TYLER BLVD MENTOR, OH USA 44060

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: