KAESER COMPRESSORS®
*Built for a lifetime.*

# PROBLEM SUMMARY

**Sample Rating Trend**


**ISO**

Machine Id
## KAESER 7057748
Component
**Compressor**
Fluid
**NOT GIVEN (--- GAL)**

## COMPONENT CONDITION SUMMARY

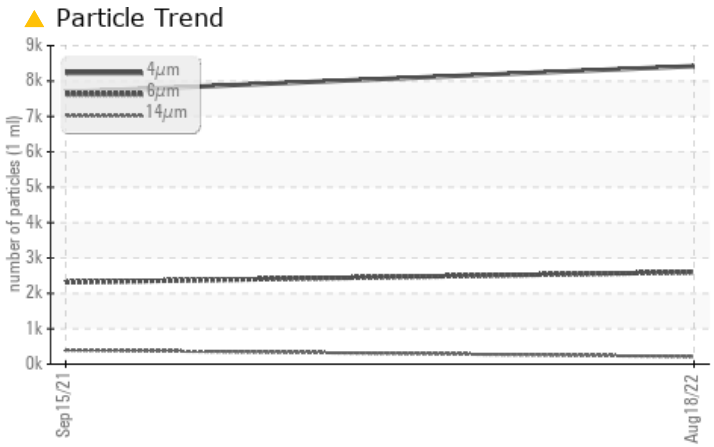


## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

| | | | | | | |
|---|---|---|---|---|---|---|
| Sample Status | | | | **ABNORMAL** | ABNORMAL | --- |
| Particles >6µm | | ASTM D7647 | >1300 | ▲ **2598** | ▲ 2313 | --- |
| Particles >14µm | | ASTM D7647 | >80 | ▲ **213** | ▲ 399 | --- |
| Particles >21µm | | ASTM D7647 | >20 | ▲ **61** | ▲ 119 | --- |
| Oil Cleanliness | | ISO 4406 (c) | >--/17/13 | ▲ **20/19/15** | ▲ 18/16 | --- |

**Customer Id:** HORCONKC
**Sample No.:** KC107357
**Lab Number:** 05644878
**Test Package:** IND 2

*To manage this report scan the QR code*

*To discuss the diagnosis or test data:*
Angela Borella +1 800-237-1369
angela.borella@wearcheckusa.com

*To change component or sample information:*
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

## RECOMMENDED ACTIONS

| Action | Status | Date | Done By | Description |
|---|---|---|---|---|
| Change Fluid | --- | --- | ? | Oil and filter change at the time of sampling has been noted. |
| Change Filter | --- | --- | ? | Oil and filter change at the time of sampling has been noted. |

## HISTORICAL DIAGNOSIS

**15 Sep 2021 Diag: Jonathan Hester**

**ISO**

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.All component wear rates are normal. There is a high amount of particulates present in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**view report**

KAESER COMPRESSORS®
*Built for a lifetime.*

# OIL ANALYSIS REPORT

Sample Rating Trend


ISO

Machine Id
## KAESER 7057748
Component
**Compressor**
Fluid
**NOT GIVEN (--- GAL)**

## DIAGNOSIS

**▲ Recommendation**
Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

**Wear**
All component wear rates are normal.

**▲ Contamination**
There is a high amount of particulates present in the oil.

**Fluid Condition**
The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | method | limit/base | current | history 1 | history 2 |
|---|---|---|---|---|---|
| Sample Number | | | **KC107357** | KC93124 | --- |
| Sample Date | | | **18 Aug 2022** | 15 Sep 2021 | --- |
| Machine Age | hrs | | **20595** | 12826 | --- |
| Oil Age | hrs | | **4000** | 3269 | --- |
| Oil Changed | | | **Changed** | Changed | --- |
| Sample Status | | | **ABNORMAL** | ABNORMAL | --- |

| WEAR METALS | | method | limit/base | current | history 1 | history 2 |
|---|---|---|---|---|---|---|
| Iron | ppm | ASTM D5185m | >50 | **0** | 0 | --- |
| Chromium | ppm | ASTM D5185m | >10 | **0** | 0 | --- |
| Nickel | ppm | ASTM D5185m | >3 | **0** | 0 | --- |
| Titanium | ppm | ASTM D5185m | >3 | **0** | 0 | --- |
| Silver | ppm | ASTM D5185m | >2 | **<1** | 0 | --- |
| Aluminum | ppm | ASTM D5185m | >10 | **<1** | 3 | --- |
| Lead | ppm | ASTM D5185m | >10 | **0** | 0 | --- |
| Copper | ppm | ASTM D5185m | >50 | **9** | 9 | --- |
| Tin | ppm | ASTM D5185m | >10 | **0** | 0 | --- |
| Antimony | ppm | ASTM D5185m | | **---** | 0 | --- |
| Vanadium | ppm | ASTM D5185m | | **0** | 0 | --- |
| Cadmium | ppm | ASTM D5185m | | **0** | 0 | --- |

| ADDITIVES | | method | limit/base | current | history 1 | history 2 |
|---|---|---|---|---|---|---|
| Boron | ppm | ASTM D5185m | | **0** | <1 | --- |
| Barium | ppm | ASTM D5185m | | **0** | 0 | --- |
| Molybdenum | ppm | ASTM D5185m | | **0** | 0 | --- |
| Manganese | ppm | ASTM D5185m | | **0** | 0 | --- |
| Magnesium | ppm | ASTM D5185m | | **0** | 4 | --- |
| Calcium | ppm | ASTM D5185m | | **0** | 0 | --- |
| Phosphorus | ppm | ASTM D5185m | | **2** | 2 | --- |
| Zinc | ppm | ASTM D5185m | | **0** | <1 | --- |

| CONTAMINANTS | | method | limit/base | current | history 1 | history 2 |
|---|---|---|---|---|---|---|
| Silicon | ppm | ASTM D5185m | >25 | **<1** | 0 | --- |
| Sodium | ppm | ASTM D5185m | | **0** | 0 | --- |
| Potassium | ppm | ASTM D5185m | >20 | **0** | 0 | --- |
| Water | % | ASTM D6304 | >0.05 | **0.012** | 0.010 | --- |
| ppm Water | ppm | ASTM D6304 | >500 | **123.8** | 101.7 | --- |

| FLUID CLEANLINESS | | method | limit/base | current | history 1 | history 2 |
|---|---|---|---|---|---|---|
| Particles >4µm | | ASTM D7647 | | **8420** | 7691 | --- |
| Particles >6µm | | ASTM D7647 | >1300 | ▲ **2598** | ▲ 2313 | --- |
| Particles >14µm | | ASTM D7647 | >80 | ▲ **213** | ▲ 399 | --- |
| Particles >21µm | | ASTM D7647 | >20 | ▲ **61** | ▲ 119 | --- |
| Particles >38µm | | ASTM D7647 | >4 | **2** | ▲ 10 | --- |
| Particles >71µm | | ASTM D7647 | >3 | **0** | 0 | --- |
| Oil Cleanliness | | ISO 4406 (c) | >--/17/13 | ▲ **20/19/15** | ▲ 18/16 | --- |

| FLUID DEGRADATION | | method | limit/base | current | history 1 | history 2 |
|---|---|---|---|---|---|---|
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | **0.35** | 0.314 | --- |

KAESER COMPRESSORS®
*Built for a lifetime.*

# OIL ANALYSIS REPORT

Particle Trend

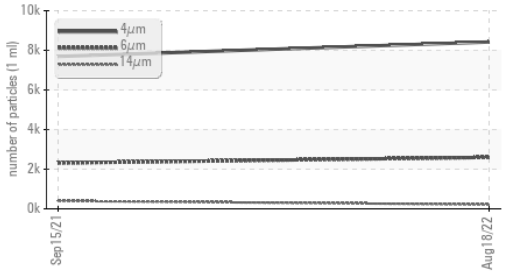


Water

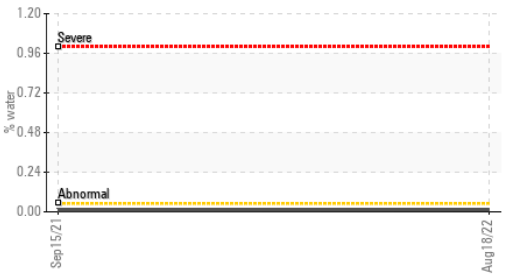


| VISUAL | | method | limit/base | current | history 1 | history 2 |
|---|---|---|---|---|---|---|
| White Metal | scalar | *Visual | NONE | **NONE** | VLITE | --- |
| Yellow Metal | scalar | *Visual | NONE | **NONE** | NONE | --- |
| Precipitate | scalar | *Visual | NONE | **NONE** | NONE | --- |
| Silt | scalar | *Visual | NONE | **NONE** | NONE | --- |
| Debris | scalar | *Visual | NONE | **LIGHT** | VLITE | --- |
| Sand/Dirt | scalar | *Visual | NONE | **NONE** | NONE | --- |
| Appearance | scalar | *Visual | NORML | **NORML** | NORML | --- |
| Odor | scalar | *Visual | NORML | **NORML** | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.05 | **NEG** | NEG | --- |
| Free Water | scalar | *Visual | | **NEG** | NEG | --- |

| FLUID PROPERTIES | | method | limit/base | current | history 1 | history 2 |
|---|---|---|---|---|---|---|
| Visc @ 40°C | cSt | ASTM D445 | | **44.3** | 44.0 | --- |

| SAMPLE IMAGES | method | limit/base | current | history 1 | history 2 |
|---|---|---|---|---|---|
| Color | | |  |  | *no image* |
| Bottom | | |  |  | *no image* |

## GRAPHS

Ferrous Alloys

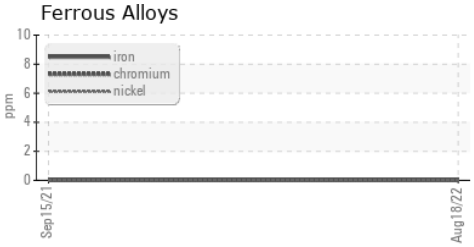


Non-ferrous Metals


Viscosity @ 40°C

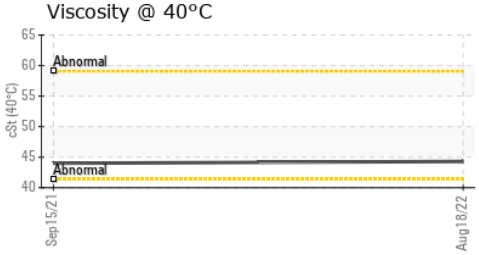


Particle Count

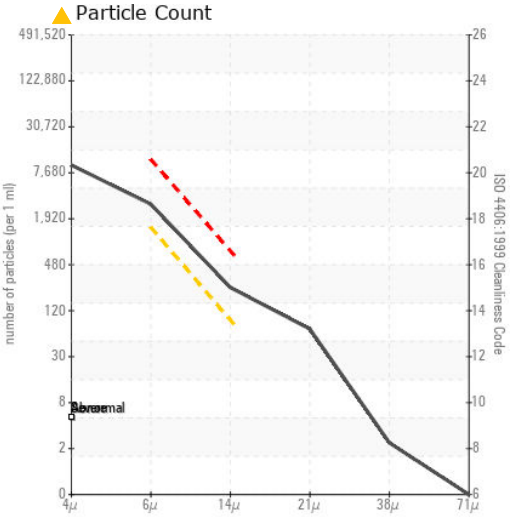


Acid Number

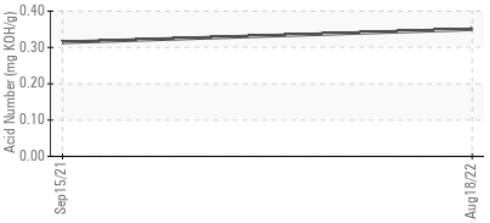


Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513
**Sample No.** : KC107357
**Lab Number** : 05644878
**Unique Number** : 10139417
**Test Package** : IND 2

**Received** : 19 Sep 2022
**Diagnosed** : 20 Sep 2022
**Diagnostician** : Angela Borella

**HORRY COUNTY WASTE**

CONWAY, SC
USA
Contact: Service Manager

T:
F:

*To discuss this sample report, contact Customer Service at 1-800-237-1369.*
** - Denotes test methods that are outside of the ISO 17025 scope of accreditation.*
*Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)*