

PROBLEM SUMMARY

Sample Rating Trend

ISO


7663382 (S/N 1041)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

COMPONENT CONDITION SUMMARY

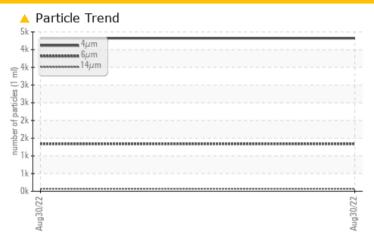

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS Sample Status ATTENTION -- -- Particles >6μm ASTM D7647 >1300 ▲ 1339 -- -- Oil Cleanliness ISO 4406 (c) >--/17/13 ▲ 19/18/13 -- --

Customer Id: LEGBOR Sample No.: KCP37336 Lab Number: 05645546 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com


To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS				
Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

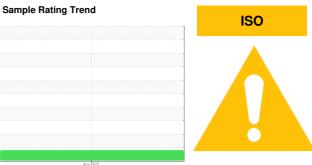

7663382 (S/N 1041)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Aug2022		
SAMPLE INFORM	IATION	method	limit/base	current	history 1	history 2
Sample Number				KCP37336		
Sample Date				30 Aug 2022		
Machine Age	hrs			7379		
Oil Age	hrs			3121		
Oil Changed				Changed		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	<1		
Aluminum	ppm	ASTM D5185m	>10	2		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	4		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	100	3		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	4		
Zinc	ppm	ASTM D5185m	0	60		
Sulfur	ppm	ASTM D5185m	23500	17296		
CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	1		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.05	0.009		
ppm Water	ppm	ASTM D6304	>500	97.7		
FLUID CLEANLIN	ESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647		4321		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14μm		ASTM D7647	>80	70		
Particles >21µm		ASTM D7647	>20	14		
Particles >38µm		ASTM D7647	>4	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u> </u>		
FLUID DEGRADA	TION	method	limit/base	current	history 1	history 2
Acid Number (AN)	ma K∩U/a	ASTM D8045	1.0	n 49		


Acid Number (AN)

mg KOH/g ASTM D8045 1.0

0.49



OIL ANALYSIS REPORT

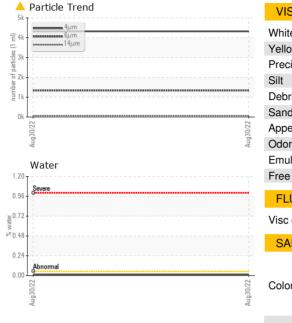

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	LIGHT		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	IES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	45	45.5		
SAMPLE IMAGES	}	method	limit/base	current	history 1	history 2
Color					no image	no image

GRAPHS Formula Alloys	A Particle Count	
Ferrous Alloys	491,520 _T	
iron chromium		
nonnana nickel	122,880	
1	30,720	
	7,680	
722		
Aug30/22.	- 0266'1 mil	
Non-ferrous Metals	Aug 30022	
copper	of too	
sessessesses lead	120	
ennance till	30-	
	8 Shreemal	
Aug30/22.	24 24 2072	
	\overline{V} 0 0 0 0 0 0 0 0 0 0	21μ 38μ 71
Viscosity @ 40°C	Acid Number	17001 1701 23
Severe	\$\frac{1.20}{\text{\$\text{Bbse}}}\$ \text{Bbse}mal	
Abnormal	Q 0.96	
Base	1.20 Hy 0.96 Bhoomal 1.20 Bhoomal 1.20 Bhoomal 1.20 Bhoomal 1.20 Bhoomal 1.20 Bhoomal 1.20 Bhoomal 1.20 Charles Charles	
Abnormal	N 0.24	
Severe	0.00 B	
Aug30/22	Aug30/22 Aug30/22	





Laboratory Sample No. Lab Number

: 05645546 Unique Number : 10140085

Bottom

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCP37336

Received Diagnosed

: 19 Sep 2022 : 21 Sep 2022

Diagnostician : Jonathan Hester

Test Package: IND 2 (Additional Tests: KF, PrtCount) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

no image

no image

USA 08505

T:

F:

LEGACY CONVERTING

Contact: Service Manager

1 ADVANTAGE CT

BORDENTOWN, NJ