

# **PROBLEM SUMMARY**

KAESER 7872719


Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

# Sample Rating Trend ISO

## **COMPONENT CONDITION SUMMARY**

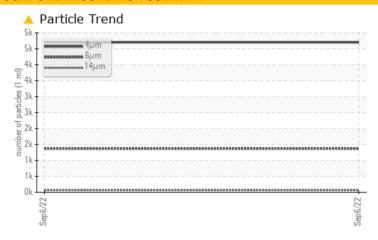

#### RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC T	EST RESULTS			
Sample Status			ATTENTION	 
Particles >6µm	ASTM D7647	>1300	<b>1370</b>	 
Oil Cleanliness	ISO 4406 (c)	>/17/13	<b>19/18/13</b>	 

Customer Id: URBRAM Sample No.: KC105502 Lab Number: 05646068 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDE	O ACTIONS			
Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

## HISTORICAL DIAGNOSIS



## **OIL ANALYSIS REPORT**

Sample Rating Trend ISO

## **KAESER 7872719**

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

## **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Sep2022		
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number				KC105502		
Sample Date				06 Sep 2022		
Machine Age	hrs			12303		
Oil Age	hrs			12303		
Oil Changed	1110			Changed		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	0		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	19		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	100	0		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	1		
Zinc	ppm	ASTM D5185m	0	3		
CONTAMINANTS	;	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	2		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.05	0.008		
ppm Water	ppm	ASTM D6304	>500	85.4		
FLUID CLEANLIN	IESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647		4703		
Particles >6µm		ASTM D7647	>1300	<u> </u>		
Particles >14µm		ASTM D7647	>80	62		
Particles >21µm		ASTM D7647	>20	7		
Particles >38µm		ASTM D7647	>4	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>19/18/13</b>		
FLUID DEGRADA	NOITA	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.30		



## **OIL ANALYSIS REPORT**

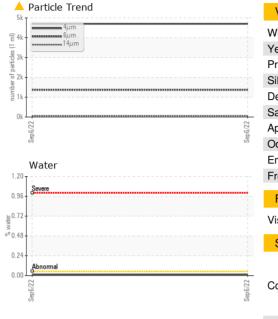

VISUAL		method	limit/base	current	history 1	history 2
Vhite Metal	scalar	*Visual	NONE	LIGHT		
ellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
ree Water	scalar	*Visual		NEG		
FLUID PROPER	TIES	method	limit/base	current	history 1	history 2
/isc @ 40°C	cSt	ASTM D445	45	43.9		
SAMPLE IMAGE	S	method	limit/base	current	history 1	history 2
Color					no image	no image
Bottom					no image	no image
GRAPHS						
Ferrous Alloys				Particle Count		
Terrous Alloys			491,520	Farticle Count		T <sup>26</sup>
iron tromium			122,880			-24
nickel						
1			30,720			+22
			7,680	<b>*</b>		-20
Sep 6/22 -			Sep6/22-20-20-20-20-20-20-20-20-20-20-20-20-2	1		18
S			Sed Sed			+10
Non-ferrous Meta	ls		Participal 480	1		16
			b 120			-14
copper						
copper			30-			12





Certificate L2367

Laboratory Sample No. Lab Number Test Package : IND 2

: 05646068 Unique Number : 10140607

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KC105502 Received

Viscosity @ 40°C

Diagnosed : 21 Sep 2022 Diagnostician : Doug Bogart **URBAN CARWASH** 785 RT 17S

RAMSEY, NJ USA 07446

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Acid Number

0.96 0.96 E 0.72

을 0.48 0.24 0.00

: 20 Sep 2022

T:

F: