

PROBLEM SUMMARY

KAESER 7939881


Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

Sample Rating Trend ISO

COMPONENT CONDITION SUMMARY

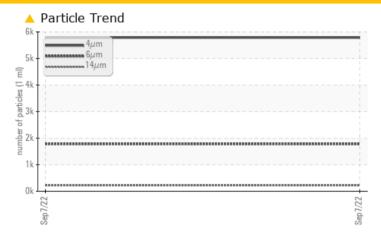

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TES	T RESULTS			
Sample Status			ABNORMAL	
Particles >6µm	ASTM D7647	>1300	1783	
Particles >14μm	ASTM D7647	>80	<u> </u>	
Particles >21µm	ASTM D7647	>20	△ 59	
Particles >38μm	ASTM D7647	>4	<u>^</u> 7	
Oil Cleanliness	ISO 4406 (c)	>/17/13	20/18/15	

Customer Id: AMANEWDE Sample No.: KCP50668 Lab Number: 05646596 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDE	O ACTIONS			
Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT



KAESER 7939881

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				_		
				Sep 2022		
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number				KCP50668		
Sample Date				07 Sep 2022		
Machine Age	hrs			1283		
Oil Age	hrs			1283		
Oil Changed				Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	<1		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	<1		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
	ррпп					
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	55		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	100	82		
Calcium	ppm	ASTM D5185m	0	2		
Phosphorus	ppm	ASTM D5185m	0	<1		
Zinc	ppm	ASTM D5185m	0	0		
Sulfur	ppm	ASTM D5185m	23500	20940		
CONTAMINANTS	,	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		4		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.05	0.026		
ppm Water	ppm	ASTM D6304	>500			
FLUID CLEANLIN	ррпп	AOTHI DOOGT	>5000	260.0		
		method	limit/base	260.0 current	history 1	history 2
Particles >4μm					history 1	history 2
Particles >4µm Particles >6µm		method		current		
		method ASTM D7647	limit/base	current 5785		
Particles >6μm		method ASTM D7647 ASTM D7647	limit/base >1300	current 5785 ▲ 1783		
Particles >6μm Particles >14μm		method ASTM D7647 ASTM D7647 ASTM D7647	limit/base	current 5785 ▲ 1783 ▲ 217		
Particles >6μm Particles >14μm Particles >21μm		method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>1300 >80 >20	current 5785 ▲ 1783 ▲ 217 ▲ 59		
Particles >6μm Particles >14μm Particles >21μm Particles >38μm		method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>1300 >80 >20 >4	current 5785 ▲ 1783 ▲ 217 ▲ 59 ▲ 7		
Particles >6μm Particles >14μm Particles >21μm Particles >38μm Particles >71μm	IESS	method ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>1300 >80 >20 >4 >3	current 5785 ▲ 1783 ▲ 217 ▲ 59 ▲ 7 0		



OIL ANALYSIS REPORT

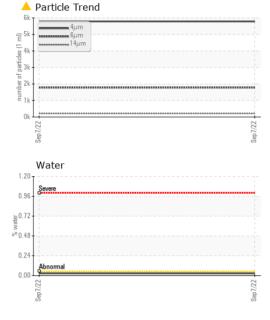

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE		
ellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
ree Water	scalar	*Visual		NEG		
FLUID PROPER	TIES	method	limit/base	current	history 1	history 2
/isc @ 40°C	cSt	ASTM D445	45	44.0		
SAMPLE IMAGE	:S	method	limit/base	current	history 1	history 2
Color				u u	no image	no image
Bottom					no image	no image
GRAPHS						
Ferrous Alloys			491,520	Particle Count		т2
iron chromium chromium irckel			122,880			-24
			30,720	Ť		-22
2			7,680	1		-20
2/			Sep7/22 (per 1 ml)	1		+18
Sc.			S d			
Sep 7/22	da		.0			111
Non-ferrous Meta	ils		of particl			116
	als		umber of partici	1		
Non-ferrous Meta	ıls		of pa	-		114





Laboratory Sample No.

Lab Number

: KCP50668 Unique Number : 10141135

: 05646596

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 20 Sep 2022 Diagnosed : 22 Sep 2022

Diagnostician : Jonathan Hester **Test Package**: IND 2 (Additional Tests: KF, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Viscosity @ 40°C

AMAZON.COM SERVICES LLC 820 FEDERAL SCHOOL LN

NEW CASTLE, DE USA 19720

Contact: Service Manager

T:

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Acid Number

(B) 1.20 0.96 Ĕ 0.72

을 0.48 0.24 0.00

Sep7/22 -

F: