

PROBLEM SUMMARY

Sample Rating Trend

ISO

A


Machine Id **501305 (S/N 1096)**

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

COMPONENT CONDITION SUMMARY

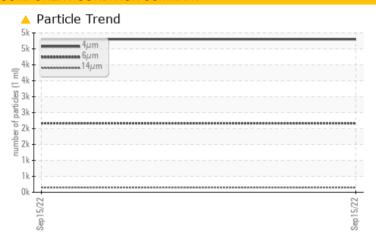

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST	T RESULTS			
Sample Status			ATTENTION	
Particles >6µm	ASTM D7647	>1300	<u> </u>	
Particles >14μm	ASTM D7647	>80	150	
Particles >21µm	ASTM D7647	>20	40	
Oil Cleanliness	ISO 4406 (c)	>/17/13	19/18/14	

Customer Id: JLGBED Sample No.: KC102710 Lab Number: 05646642 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS						
Action	Status	Date	Done By	Description		
Change Fluid			?	Oil and filter change at the time of sampling has been noted.		
Change Filter			?	Oil and filter change at the time of sampling has been noted.		

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

ISO



Machine Id **501305 (S/N 1096)**

Compressor

KAESER SIGMA (OEM) S-460 (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

				Sep2022		
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number				KC102710		
Sample Date				15 Sep 2022		
Machine Age	hrs			3677		
Oil Age	hrs			3677		
Oil Changed				Changed		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	<1		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	0		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	2		
Lead	ppm	ASTM D5185m	>10	0		
		ASTM D5185m	>50	18		
Copper Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m	>10	0		
	ppm			-		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	90	5		
Calcium	ppm	ASTM D5185m	2	0		
Phosphorus	ppm	ASTM D5185m		2		
Zinc	ppm	ASTM D5185m		7		
CONTAMINANTS	3	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	<1		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.05	0.010		
ppm Water	ppm	ASTM D6304	>500	102.1		
FLUID CLEANLIN	IESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647		4802		
Particles >6µm		ASTM D7647	>1300	^ 2165		
Particles >14µm		ASTM D7647	>80	<u> </u>		
Particles >21µm		ASTM D7647	>20	△ 40		
Particles >38µm		ASTM D7647	>4	3		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>/17/13	△ 19/18/14		
	TION					
FLUID DEGRADA	ATION	method	limit/base	current	history 1	history 2


Acid Number (AN)

mg KOH/g ASTM D8045 0.4

0.38



OIL ANALYSIS REPORT

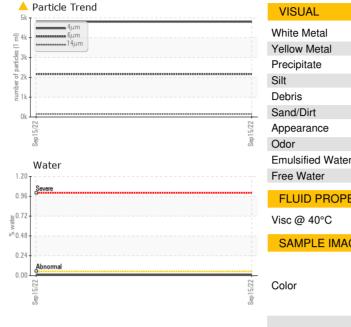

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPER	TIES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	46	44.5		
SAMPLE IMAGE	S	method	limit/base	current	history 1	history 2
Color					no image	no image
Bottom					no image	no image
GRAPHS						
Ferrous Alloys			491,520	Particle Count	t	2
iron			431,320			T ²
6 - nickel			122,880	+		+2
			30,720			+2
2			30,720	Ī		12
0			7,680	, N.		-2
Sep15/22			Sep15/22 s (per 1 ml)	1		1
Sep			Sep sa (pe	11		1
Non-ferrous Meta	ıls		480 partici	1		12 -1 -1 -1
copper			Sep 15/22 1.920 that of particles (per 1 ml)			
nassassassas lead			dm dm		,	
			30	1	1	-1
5 -			8	Sibrese mal		-1
) L				D D D D D D D D D D D D D D D D D D D		
Sep15/22			Sep15/22			1
Sep			Sep		.,	
Viscosity @ 40°C			8 0	ப்பட்டி Acid Number	14μ 21μ	38μ 71μ
Abnormal			€ 0.50			
0 - Abnormal			0.5.0 Violet (mg kg	Base		***************************************
Base			£ 0.30	1		
Abnormal			를 0.20	1		
			- -	†:		
5 4			————— < n nn	1.4		



Certificate L2367

Report Id: JLGBED [WUSCAR] 05646642 (Generated: 09/22/2022 11:35:25)

Laboratory Sample No. Lab Number Test Package : IND 2

Unique Number : 10141181

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KC102710 : 05646642

Received : 20 Sep 2022 Diagnosed : 22 Sep 2022 Diagnostician : Jonathan Hester JLG BEDFORD 441 WEBER LN BEDFORD, PA USA 15522

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: