

PROBLEM SUMMARY

Machine Id KAESER 4539663 (S/N 1059)


Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

Sample Rating Trend ISO September 1997

COMPONENT CONDITION SUMMARY

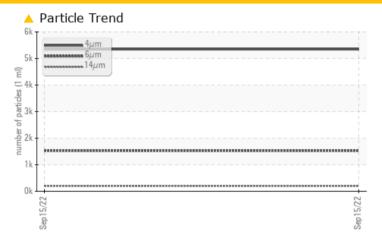

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TE	ST RESULTS			
Sample Status			ABNORMAL	
Particles >6µm	ASTM D7647	>1300	1528	
Particles >14µm	ASTM D7647	>80	198	
Particles >21µm	ASTM D7647	>20	△ 53	
Particles >38µm	ASTM D7647	>4	<u>^</u> 6	
Oil Cleanliness	ISO 4406 (c)	>/17/13	<u>^</u> 20/18/15	

Customer Id: VANARL Sample No.: KCP50326 Lab Number: 05648339 Test Package: IND 2

To manage this report scan the QR code

To discuss the diagnosis or test data: Doug Bogart +1 (800)237-1369 x4016 dougb@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDE	O ACTIONS			
Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

HISTORICAL DIAGNOSIS




OIL ANALYSIS REPORT

KAESER 4539663 (S/N 1059)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

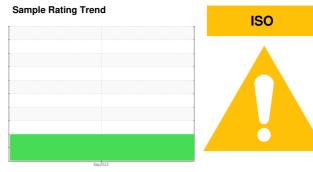

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


				Sep2022		
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number				KCP50326		
Sample Date				15 Sep 2022		
Machine Age	hrs			80029		
Oil Age	hrs			10000		
Oil Changed				Changed		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	0		
Chromium	ppm	ASTM D5185m	>10	0		
Nickel	ppm	ASTM D5185m	>3	<1		
Titanium	ppm	ASTM D5185m	>3	0		
Silver	ppm	ASTM D5185m	>2	0		
Aluminum	ppm	ASTM D5185m	>10	<1		
Lead	ppm	ASTM D5185m	>10	0		
Copper	ppm	ASTM D5185m	>50	4		
Tin	ppm	ASTM D5185m	>10	0		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	0	0		
Barium	ppm	ASTM D5185m	90	0		
Molybdenum	ppm	ASTM D5185m	0	0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m	100	0		
Calcium	ppm	ASTM D5185m	0	0		
Phosphorus	ppm	ASTM D5185m	0	16		
Zinc	ppm	ASTM D5185m	0	0		
Sulfur	ppm	ASTM D5185m	23500	10381		
CONTAMINANTS	3	method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	9		
Sodium	ppm	ASTM D5185m		<1		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.05	0.010		
ppm Water	ppm	ASTM D6304	>500	103.8		
FLUID CLEANLIN	NESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647		5346		
Particles >6µm		ASTM D7647	>1300	1528		
Particles >14µm		ASTM D7647	>80	198		
Particles >21µm		ASTM D7647	>20	△ 53		
Particles >38µm		ASTM D7647	>4	<u>^</u> 6		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 20/18/15		
FLUID DEGRADA	ATION	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.97		



OIL ANALYSIS REPORT

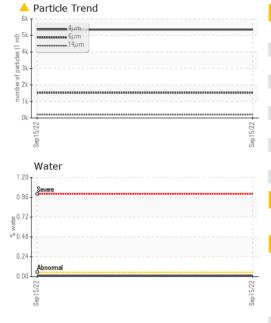

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	LIGHT		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.05	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	TES	method	limit/base	current	history 1	history 2
FLUID PROPERT Visc @ 40°C	TIES cSt	method ASTM D445	limit/base 45	current 50.6	history 1	history 2
	cSt				,	history 2 history 2
Visc @ 40°C	cSt	ASTM D445	45	50.6		
Visc @ 40°C SAMPLE IMAGES	cSt	ASTM D445	45	50.6	history 1	history 2

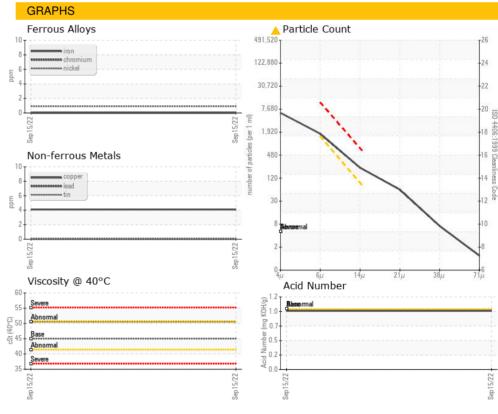





Laboratory Sample No. Lab Number Unique Number : 10142878

: KCP50326 : 05648339

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

Diagnosed

: 22 Sep 2022

: 24 Sep 2022 Diagnostician : Doug Bogart

USA 76017 Contact: Service Manager

VANDERGRIFF HONDA

Test Package : IND 2 (Additional Tests: KF, PrtCount) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

1104 W I20

T:

F:

ARLINGTON, TX