

# **PROBLEM SUMMARY**

Sample Rating Trend

ISO


KAESER 6852716

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

## **COMPONENT CONDITION SUMMARY**

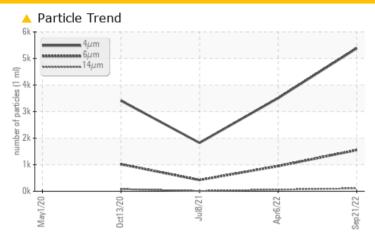

#### RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS							
Sample Status		ATTENTION	NORMAL	NORMAL			
Particles >6µm	ASTM D7647 >130	00 🔺 1553	947	423			
Particles >14µm	ASTM D7647 >80	<u> </u>	61	10			
Oil Cleanliness	ISO 4406 (c) >/1	7/13 <b>A 20/18/14</b>	17/13	16/10			

Customer Id: ULTNEW Sample No.: KC85999 Lab Number: 05648931 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data: Jonathan Hester +1 919-379-4092 x4092 jhester@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

#### **RECOMMENDED ACTIONS**

Action	Status	Date	Done By	Description
Change Fluid			?	Oil and filter change at the time of sampling has been noted.
Change Filter			?	Oil and filter change at the time of sampling has been noted.

#### HISTORICAL DIAGNOSIS

#### 06 Apr 2022 Diag: Don Baldridge

#### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



#### 08 Jul 2021 Diag: Angela Borella

#### NORMAL



Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

# view report

### 13 Oct 2020 Diag: Angela Borella

#### NORMAL




The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. The amount and size of particulates present in the system are acceptable. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





# **OIL ANALYSIS REPORT**

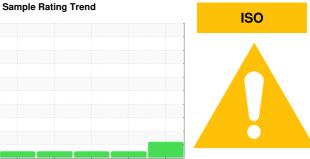

# **KAESER 6852716**

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

## **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of particulates present in the oil.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


		May2020	0d2020	Jul2021 Apr2022	Sep2022	
SAMPLE INFORM	MATION	method	limit/base	current	history 1	history 2
Sample Number				KC85999	KCP44793	KC98050
Sample Date				21 Sep 2022	06 Apr 2022	08 Jul 2021
Machine Age	hrs			23049	19233	12724
Oil Age	hrs			4000	3000	3000
Oil Changed				Changed	Changed	Changed
Sample Status				ATTENTION	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history 1	history 2
Iron	ppm	ASTM D5185m	>50	<1	<1	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	5	10	9
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history 1	history 2
Boron	ppm	ASTM D5185m	0	0	0	9
Barium	ppm	ASTM D5185m	90	6	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	100	16	2	3
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	12	3	<1
Zinc	ppm	ASTM D5185m	0	9	2	2
CONTAMINANTS		method	limit/base	current	history 1	history 2
Silicon	ppm	ASTM D5185m	>25	1	<1	1
Sodium	ppm	ASTM D5185m		6	0	1
Potassium	ppm	ASTM D5185m	>20	3	<1	0
Water	%	ASTM D6304	>0.05	0.016	0.002	0.007
ppm Water	ppm	ASTM D6304	>500	164.1	17.2	71.3
FLUID CLEANLIN	IESS	method	limit/base	current	history 1	history 2
Particles >4µm		ASTM D7647		5384	3507	1823
Particles >6µm		ASTM D7647	>1300	<b>1553</b>	947	423
Particles >14μm		ASTM D7647	>80	<u> </u>	61	10
Particles >21µm		ASTM D7647	>20	19	12	2
Particles >38μm		ASTM D7647	>4	1	0	0
Particles >71μm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>20/18/14</b>	17/13	16/10
FLUID DEGRADA	TION	method	limit/base	current	history 1	history 2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.34	0.34	0.288



# **OIL ANALYSIS REPORT**

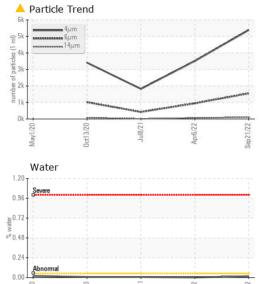

VISUAL		method	limit/base	current	history 1	history 2
White Metal	scalar	*Visual	NONE	LIGHT	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
<b>Emulsified Water</b>	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	ΓIES	method	limit/base	current	history 1	history 2
Visc @ 40°C	cSt	ASTM D445	45	43.9	44.1	44.5
SAMPLE IMAGES	S	method	limit/base	current	history 1	history 2
Color						
Bottom						

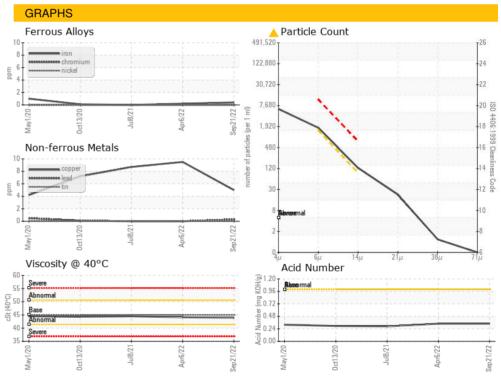





Certificate L2367

Laboratory Sample No. Lab Number Unique Number : 10143470

Test Package : IND 2

: KC85999 : 05648931

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received

: 22 Sep 2022 Diagnosed : 26 Sep 2022 Diagnostician : Jonathan Hester

**ULTIMA GENOMICS** 7979 GATEWAY BLVD NEWARK, CA

USA 94560

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: