



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L120F LDR010
Component
Transmission (Auto)
Fluid
VOLVO AT 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0937695	WC0925795	WC0879674
Sample Date		Client Info		01 Jun 2024	28 Apr 2024	02 Dec 2023
Machine Age	hrs	Client Info		12700	12388	10822
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	295	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>160	14	16	7
Chromium	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	0	0	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>50	1	1	<1
Lead	ppm	ASTM D5185(m)	>50	0	0	0
Copper	ppm	ASTM D5185(m)	>225	3	4	2
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	23	27	29
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	4	2
Boron	ppm	ASTM D5185(m)	187	76	71	83
Barium	ppm	ASTM D5185(m)	0.0	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	0.0	<1	<1	1
Manganese	ppm	ASTM D5185(m)	0.0	<1	<1	0
Magnesium	ppm	ASTM D5185(m)	6.8	21	24	25
Calcium	ppm	ASTM D5185(m)	215	64	61	59
Phosphorus	ppm	ASTM D5185(m)	445	225	229	221
Zinc	ppm	ASTM D5185(m)	56	47	54	49
Sulfur	ppm	ASTM D5185(m)	1336	1532	1665	1666
Visc @ 40°C	cSt	ASTM D7279(m)	35.3	29.7	29.6	29.6

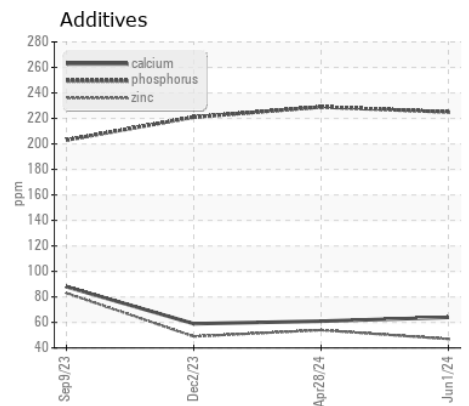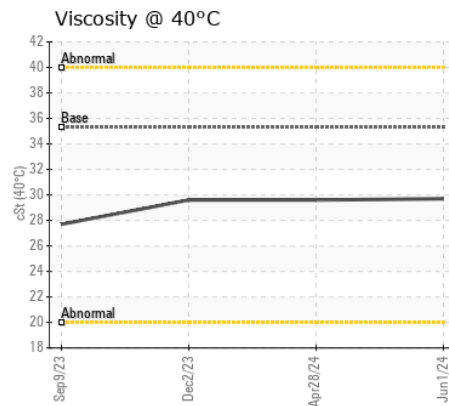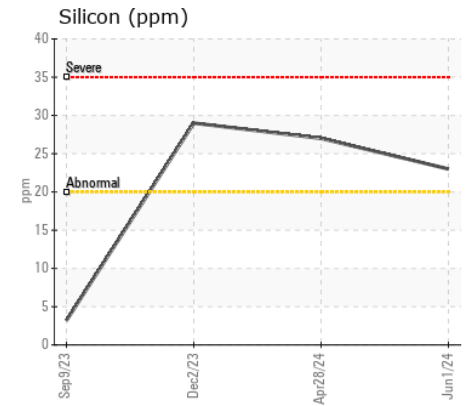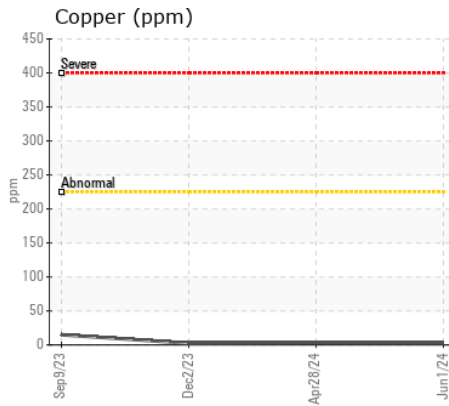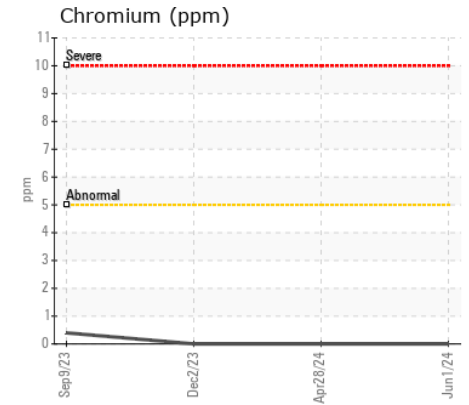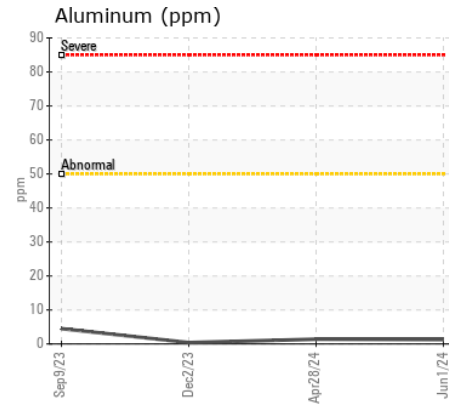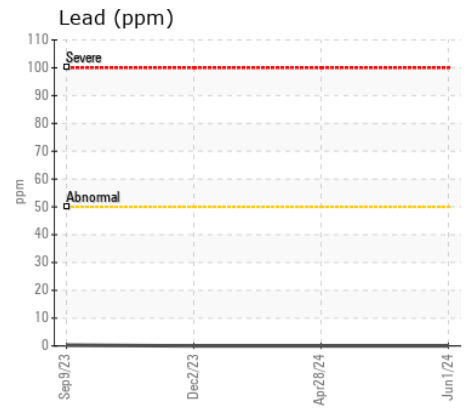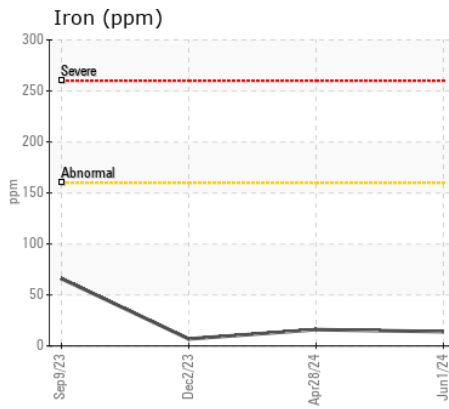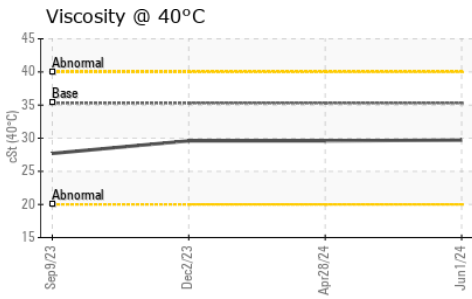

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0937695
Lab Number : 02640296
Unique Number : 5789458
Test Package : MOB 1

Received : 06 Jun 2024
Tested : 06 Jun 2024
Diagnosed : 07 Jun 2024 - Kevin Marson

Agnico Eagle Canada
 1350 Government Rd. W, MACASSA COMPLEX
 Kirkland Lake, ON
 CA P2N 3J1
 Contact: Jay Gould
 MacassaMobileUGPlanning@agnicoeagle.com
 T: (705)567-5208
 F: (705)567-5221

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.