



Secteur

**MICHAUDVILLE**

Identité de la machine

**1202**

Composant

**Transmission (Auto)**

Fluid

**DEXRON III (--- GAL)**

**RECOMMENDATION**

We recommend that you drain the fluid from the component if this has not already been done. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample.

**USURE**

Iron and lead ppm levels are abnormal. Clutch disc wear indicated. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion.

**CONTAMINATION**

There is no indication of any contamination in the fluid.

**ÉTAT DU FLUIDE**














The fluid is no longer serviceable as a result of the abnormal and/or severe wear.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Numéro d'échant.		Client Info		<b>PC0083712</b>	PC0082245	PC0075808
Date d'échant.		Client Info		<b>16 Jan 2024</b>	20 Sep 2023	07 Jun 2023
Âge d la Machine	hrs	Client Info		<b>12644</b>	12197	11736
Âge de l'huile	hrs	Client Info		<b>0</b>	0	0
Âge du filtre	hrs	Client Info		<b>0</b>	0	0
Huile changée		Client Info		<b>N/A</b>	N/A	N/A
Filtre changé		Client Info		<b>N/A</b>	N/A	N/A
Statut de l'échant.				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

PQ		ASTM D8184*	>50	<b>29</b>	9	13
Fer	ppm	ASTM D5185(m)	>160	<b>▲ 218</b>	▲ 199	▲ 208
Chrome	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	0
Titane	ppm	ASTM D5185(m)		<b>0</b>	0	0
Argent	ppm	ASTM D5185(m)	>5	<b>0</b>	0	0
Aluminium	ppm	ASTM D5185(m)	>50	<b>27</b>	26	30
Plomb	ppm	ASTM D5185(m)	>50	<b>▲ 65</b>	▲ 61	▲ 65
Cuivre	ppm	ASTM D5185(m)	>225	<b>29</b>	29	32
Étain	ppm	ASTM D5185(m)	>10	<b>3</b>	3	4
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Métal blanc	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Bronze	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

Silicium	ppm	ASTM D5185(m)	>20	<b>7</b>	7	8
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	2	2
L'eau		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Limon	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Débris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Saleté	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Apparence	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odeur	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Eau émulsifiée	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

Sodium	ppm	ASTM D5185(m)		<b>8</b>	9	10
Bore	ppm	ASTM D5185(m)		<b>141</b>	146	173
Baryum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdène	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Manganèse	ppm	ASTM D5185(m)		<b>2</b>	2	2
Magnésium	ppm	ASTM D5185(m)		<b>1</b>	<1	<1
Calcium	ppm	ASTM D5185(m)		<b>129</b>	129	137
Phosphore	ppm	ASTM D5185(m)		<b>398</b>	430	473
Zinc	ppm	ASTM D5185(m)		<b>16</b>	17	18
Soufre	ppm	ASTM D5185(m)		<b>2079</b>	1994	2231
Visc 40°C	cSt	ASTM D7279(m)	26.0	<b>34.7</b>	34.4	34.5
Visc 100°C	cSt	ASTM D7279(m)	5.5	<b>6.8</b>	6.8	6.8
Indice de viscosité (VI)	Scale	ASTM D2270*	155	<b>158</b>	160	159

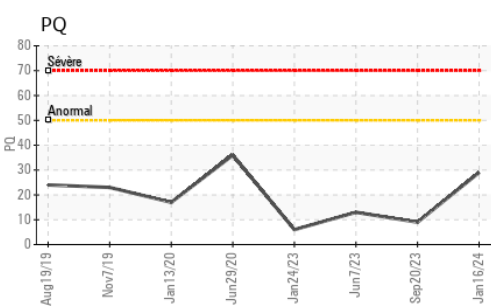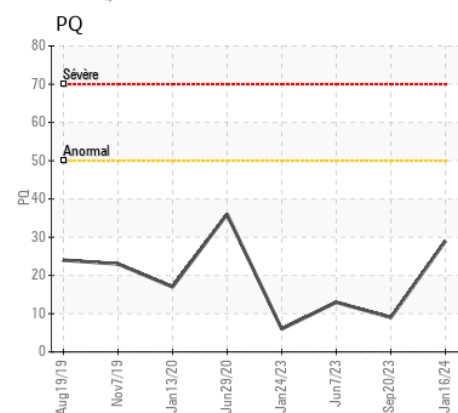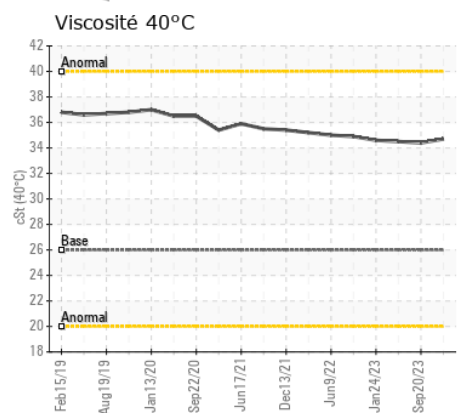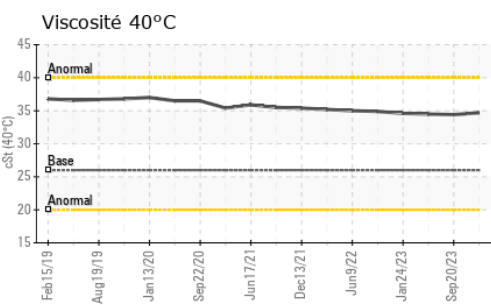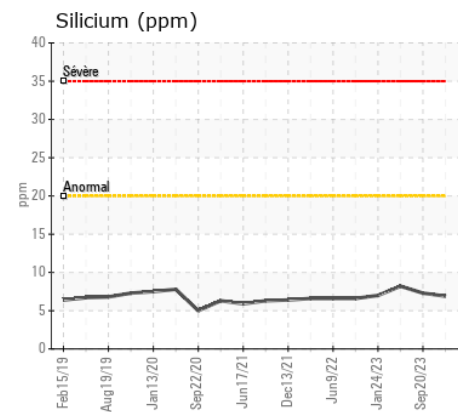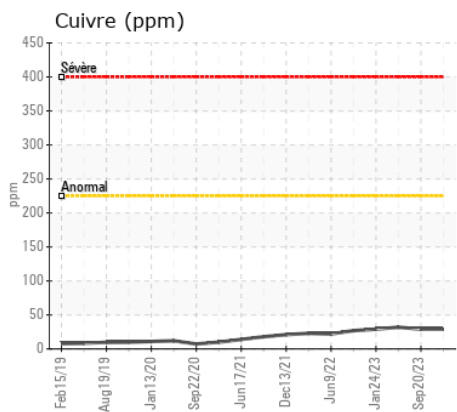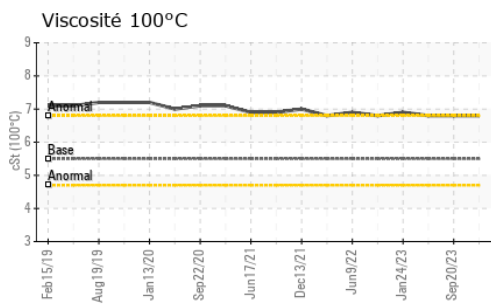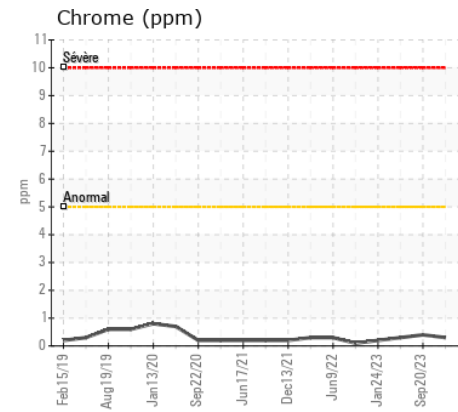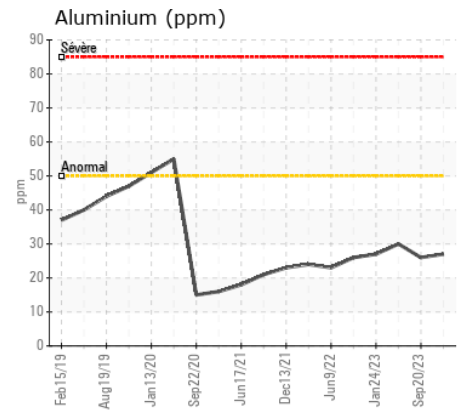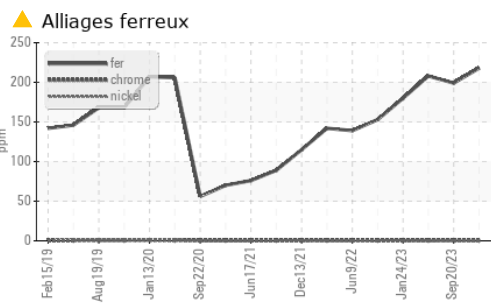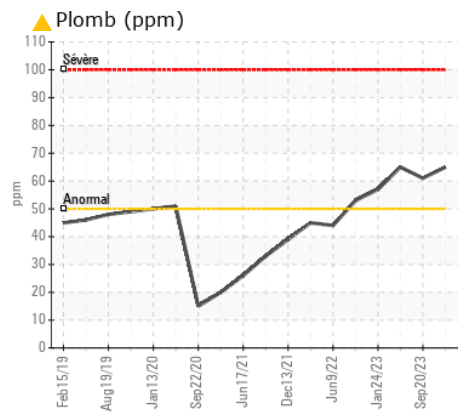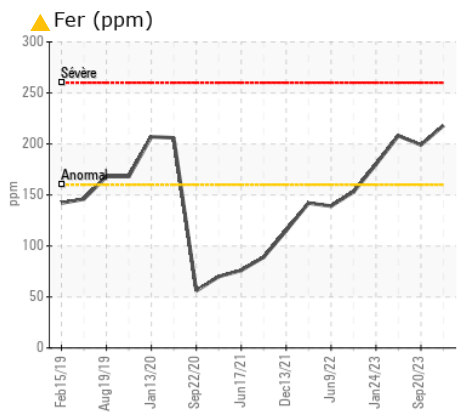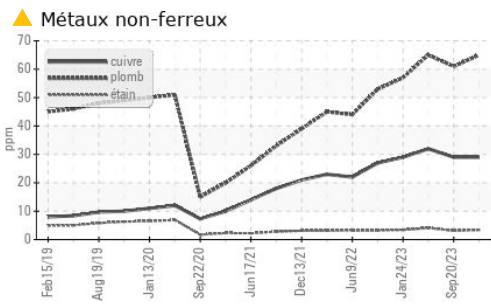

**Laboratoire** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **LES ENTREPRISES MICHAUVILLE INC.**  
**N° d'échantillon** : PC0083712 **Reçu** : 17 Jan 2024 270 RUE BRUNET  
**N° de laboratoire** : 02609444 **Diagnostiqué** : 18 Jan 2024 MONT ST-HILAIRE, QC  
**Numéro unique** : 5710530 **Diagnostiqueur** : Kevin Marson CA J3H 0M6  
**Analyse** : MOB 1 ( Additional Tests: KV100, PQ, VI ) Contact: Martin Trudel  
 T: mtrudel@michaudville.com

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. T:  
 La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada. F: