


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

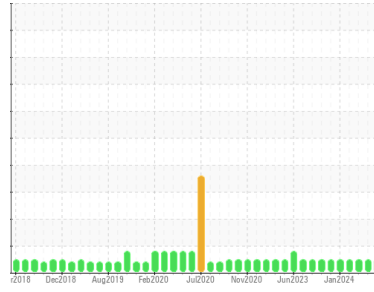

Area

Aft Machinery Space [450339560]

Machine Id

Thruster Aft Center - Lubrication System (S/N Sample Tag CL-06001-S1)

Component

Lube System

Fluid

PETRO CANADA ENERGOL GR-XP ISO 150 (5000 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MAR 3 test kits, this testkit includes Analytical Ferrography which provides a detailed morphological analysis of wear particles present in the fluid.

Wear

Component wear rates appear to be normal (unconfirmed).

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PC0080150	PC	PC0081639
Sample Date	Client Info	21 May 2024	21 Apr 2024	31 Mar 2024
Machine Age	hrs	0	0	0
Oil Age	hrs	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184*	0	0	0
Iron	ppm ASTM D5185(m) >20	1	1	1
Chromium	ppm ASTM D5185(m) >10	0	0	0
Nickel	ppm ASTM D5185(m) >10	0	0	0
Titanium	ppm ASTM D5185(m)	0	0	0
Silver	ppm ASTM D5185(m)	0	0	0
Aluminum	ppm ASTM D5185(m) >10	0	0	0
Lead	ppm ASTM D5185(m) >20	0	0	0
Copper	ppm ASTM D5185(m) >20	0	0	<1
Tin	ppm ASTM D5185(m) >10	0	0	0
Antimony	ppm ASTM D5185(m)	0	0	0
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0






ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m)	2	2	2
Barium	ppm ASTM D5185(m)	0	<1	0
Molybdenum	ppm ASTM D5185(m)	0	0	0
Manganese	ppm ASTM D5185(m)	0	0	0
Magnesium	ppm ASTM D5185(m)	<1	1	0
Calcium	ppm ASTM D5185(m)	2	3	2
Phosphorus	ppm ASTM D5185(m)	314	299	306
Zinc	ppm ASTM D5185(m)	6	6	5
Sulfur	ppm ASTM D5185(m)	7793	7528	7762
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >15	<1	<1	<1
Sodium	ppm ASTM D5185(m)	0	0	<1
Potassium	ppm ASTM D5185(m) >20	0	0	<1

OIL ANALYSIS REPORT

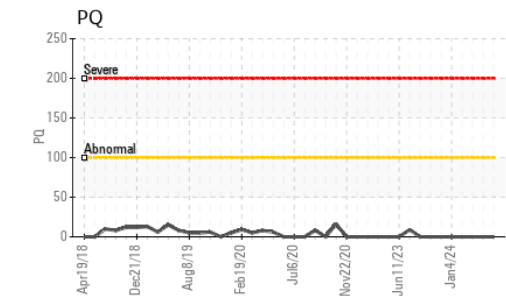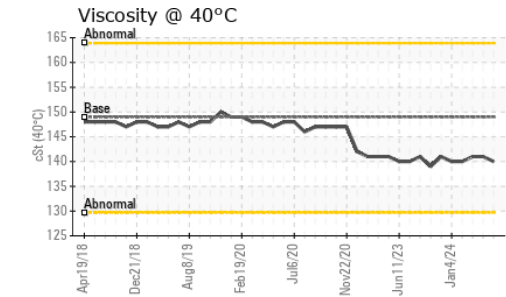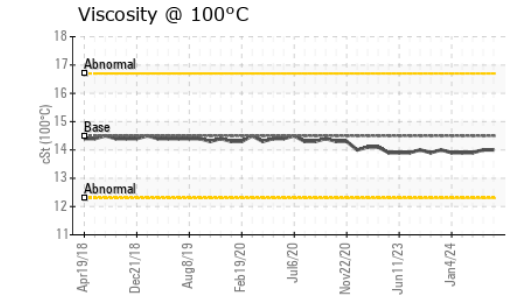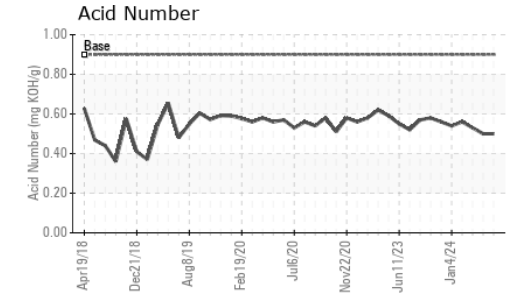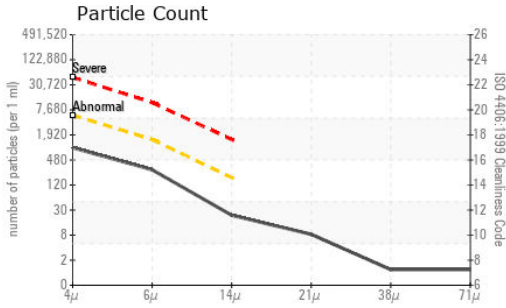

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	833	969	1154	
Particles >6µm	ASTM D7647	>1300	246	263	169	
Particles >14µm	ASTM D7647	>160	20	19	6	
Particles >21µm	ASTM D7647	>40	7	4	2	
Particles >38µm	ASTM D7647	>10	1	0	0	
Particles >71µm	ASTM D7647	>3	1	0	0	
Oil Cleanliness	ISO 4406 (c)	>19/17/14	17/15/11	17/15/11	17/15/10	

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.9	0.50	0.50	0.53

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	149	140	141	141
Visc @ 100°C	cSt	ASTM D7279(m)	14.5	14.0	14.0	13.9
Viscosity Index (VI)	Scale	ASTM D2270*		96	95	94

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						
Bottom						



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0080150
Lab Number : **02640257**
Unique Number : 5789419
Test Package : MAR 2 (Additional Tests: KV100, PQ, VI)
Received : 06 Jun 2024
Tested : 07 Jun 2024
Diagnosed : 07 Jun 2024 - Kevin Marson

Suncor - Terra Nova Projects
 Scotia Centre, 235 Water Street
 St. John's, NL
 CA A1C 1B6
 Contact: Josh Hynes
 joshynes@suncor.com
 T: (709)778-3575
 F: (709)724-2835

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.