




OIL ANALYSIS REPORT

Sample Rating Trend

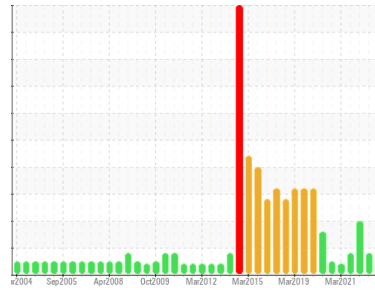

NORMAL



Area
[198759]
 Machine Id
LWN G1 GOV (S/N MB8-601-9070)
 Component
Circulating Governor System
 Fluid
ESSO TERESSO ISO 68 (546 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0445232	WC0299261	WC0299274
Sample Date	Client Info	21 Mar 2023	17 Oct 2022	14 Mar 2022
Machine Age	hrs Client Info	0	1984	0
Oil Age	hrs Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		NORMAL	ATTENTION	ATTENTION

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >50	0	0	0
Chromium	ppm ASTM D5185(m) >10	0	0	0
Nickel	ppm ASTM D5185(m) >10	<1	<1	0
Titanium	ppm ASTM D5185(m)	0	0	0
Silver	ppm ASTM D5185(m)	0	0	0
Aluminum	ppm ASTM D5185(m) >3	<1	<1	<1
Lead	ppm ASTM D5185(m) >75	<1	<1	<1
Copper	ppm ASTM D5185(m) >15	1	<1	2
Tin	ppm ASTM D5185(m) >55	0	0	8
Antimony	ppm ASTM D5185(m) >5	<1	0	<1
Vanadium	ppm ASTM D5185(m)	0	0	0
Beryllium	ppm ASTM D5185(m)	0	0	0
Cadmium	ppm ASTM D5185(m)	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 4.5	0	<1	<1
Barium	ppm ASTM D5185(m) 0.4	0	0	0
Molybdenum	ppm ASTM D5185(m) 0	0	0	0
Manganese	ppm ASTM D5185(m)	0	0	0
Magnesium	ppm ASTM D5185(m) 0	<1	0	0
Calcium	ppm ASTM D5185(m) 0	0	0	1
Phosphorus	ppm ASTM D5185(m) 0.7	23	28	▲ 632
Zinc	ppm ASTM D5185(m) 0	10	10	▲ 39
Sulfur	ppm ASTM D5185(m) 1315	2338	2326	▲ 1756
Lithium	ppm ASTM D5185(m)	<1	<1	<1

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >8	<1	<1	<1
Sodium	ppm ASTM D5185(m)	0	<1	0
Potassium	ppm ASTM D5185(m) >20	0	<1	<1





FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >5000	2935	4508	▲ 7493
Particles >6µm	ASTM D7647 >1300	698	▲ 1395	▲ 1518
Particles >14µm	ASTM D7647 >160	54	102	77
Particles >21µm	ASTM D7647 >40	19	25	17
Particles >38µm	ASTM D7647 >10	2	1	2
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >19/17/14	19/17/13	▲ 19/18/14	▲ 20/18/13

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974* 0.02	0.11	0.09	0.33


OIL ANALYSIS REPORT

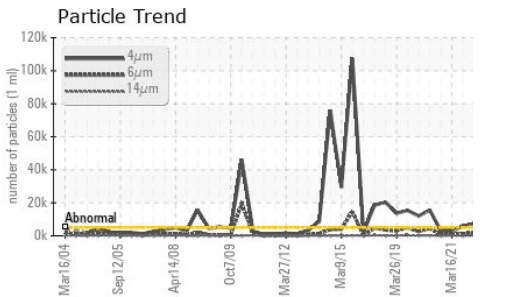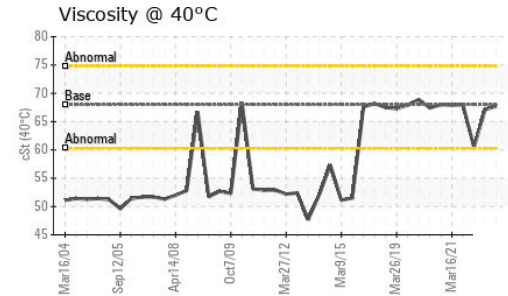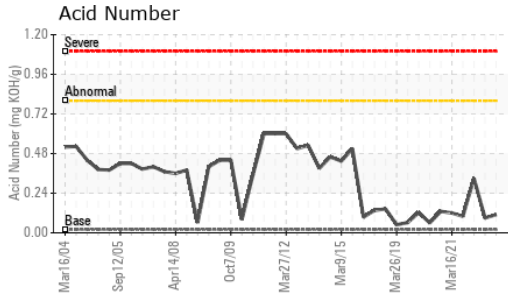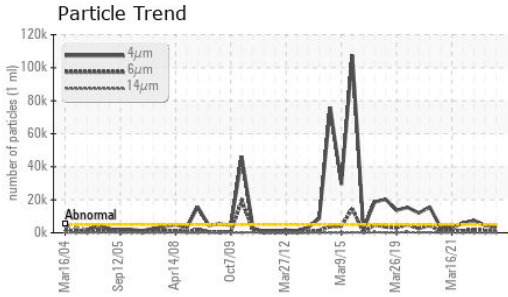






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	68	67.7	67.1	60.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

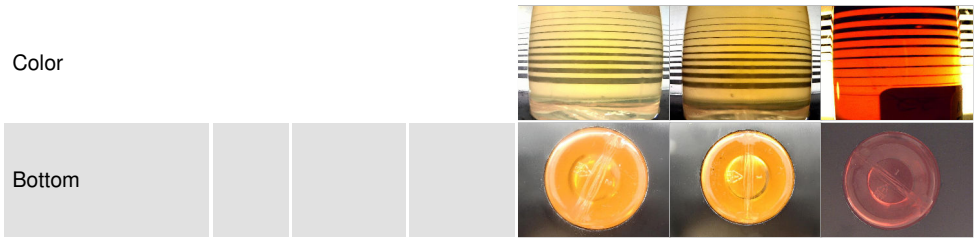

GRAPHS

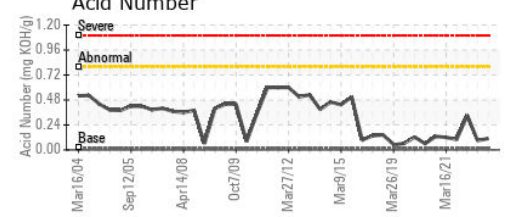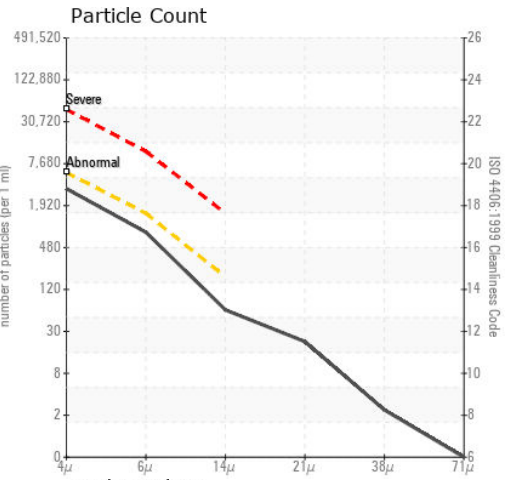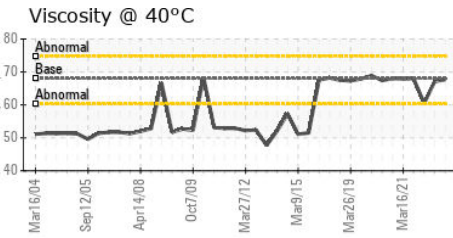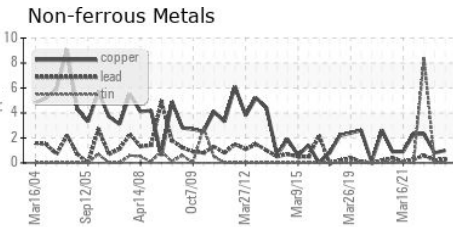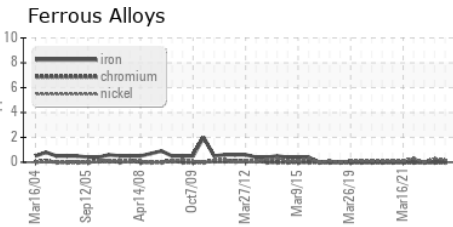

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0445232 **Received** : 28 Apr 2023
Lab Number : 02554153 **Diagnosed** : 01 May 2023
Unique Number : 5567168 **Diagnostician** : Wes Davis
Test Package : IND 2 (Additional Tests: TAN Man)

NEWFOUNDLAND POWER INC.
 50 DUFFY PLACE, PO BOX 8910
 ST. JOHNS, NL
 CA A1B 3P6
 Contact: Paul Martin
 pmartin@newfoundlandpower.com
 T:
 F: (709)737-2926

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.