




# OIL ANALYSIS REPORT

Sample Rating Trend

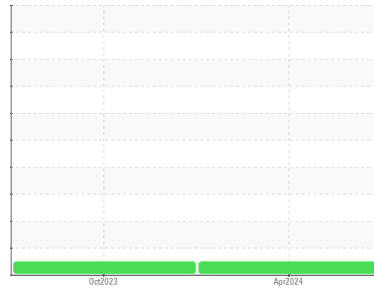

**NORMAL**



Area

[156326]

Machine Id

**ULTRA 26**

Component

**Hydraulic System**

Fluid

**PETRO CANADA PURITY FG AW HYDRAULIC 32 (30 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0929906</b>	WC0850448	---
Sample Date	Client Info		<b>10 Apr 2024</b>	04 Oct 2023	---
Machine Age	hrs	Client Info	<b>0</b>	0	---
Oil Age	hrs	Client Info	<b>0</b>	6	---
Oil Changed	Client Info		<b>N/A</b>	Not Changd	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>20	<b>2</b>	3	---
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185(m)	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	---
Lead	ppm	ASTM D5185(m)	>10	<b>0</b>	<1	---
Copper	ppm	ASTM D5185(m)	>75	<b>0</b>	<1	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	---
Calcium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Phosphorus	ppm	ASTM D5185(m)		<b>449</b>	475	---
Zinc	ppm	ASTM D5185(m)		<b>5</b>	5	---
Sulfur	ppm	ASTM D5185(m)		<b>456</b>	456	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---

## CONTAMINANTS




	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	---
Sodium	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	---

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>1511</b>	2848	---
Particles >6µm	ASTM D7647	>1300	<b>331</b>	562	---
Particles >14µm	ASTM D7647	>160	<b>16</b>	12	---
Particles >21µm	ASTM D7647	>40	<b>4</b>	4	---
Particles >38µm	ASTM D7647	>10	<b>1</b>	1	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>18/16/11</b>	19/16/11	---



# OIL ANALYSIS REPORT

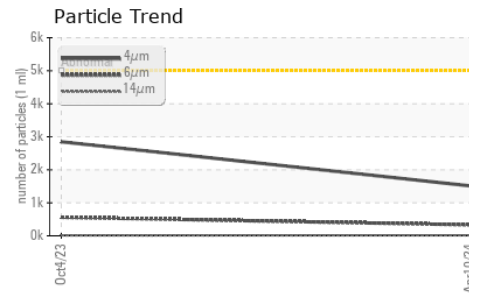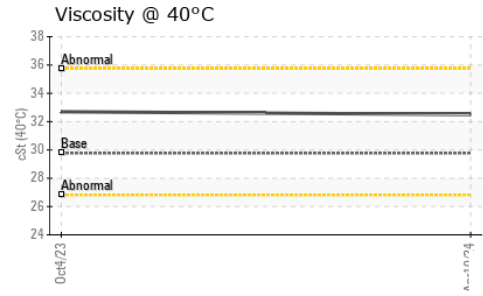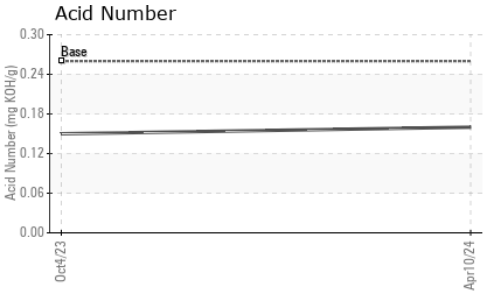






FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.26	<b>0.16</b>	0.15	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	---
Free Water	scalar	Visual*		<b>NEG</b>	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	29.77	<b>32.5</b>	32.7	---

SAMPLE IMAGES	method	limit/base	current	history1	history2		
Color							no image
Bottom							no image

## GRAPHS

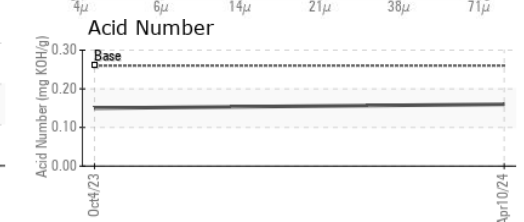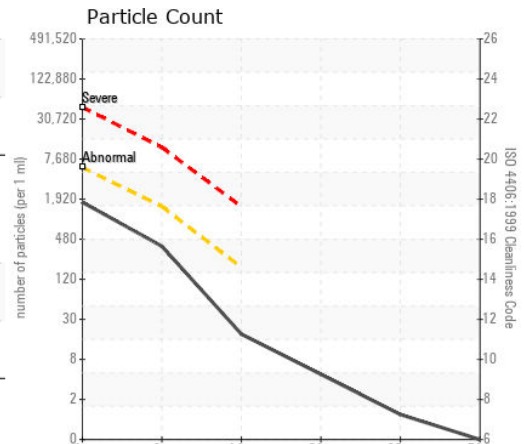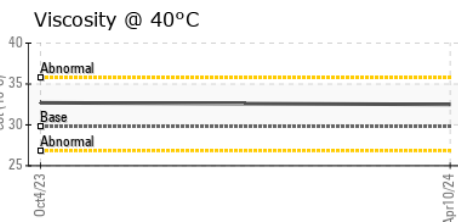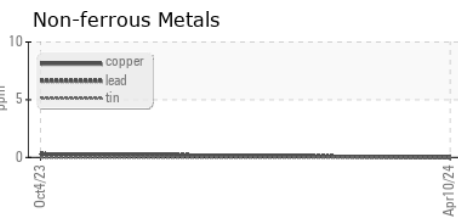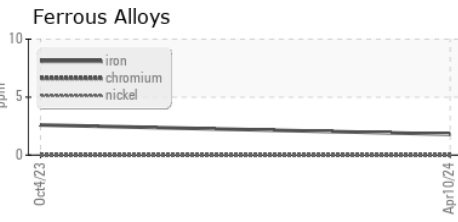

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0929906 **Received** : 12 Apr 2024  
**Lab Number** : **02628472** **Tested** : 15 Apr 2024  
**Unique Number** : 5761604 **Diagnosed** : 15 Apr 2024 - Wes Davis  
**Test Package** : IND 2

**GRAND RIVER FOODS**  
 190 VONDRAU DRIVE  
 CAMBRIDGE, ON  
 CA N3E 1B8  
 Contact: Dan Jean-Marie  
 djeanmarie@grandriverfoods.com  
 T: (519)653-3577  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.