

OIL ANALYSIS REPORT





DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please note that this is a corrected copy for data entry update for oil type.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid. The amount and size of particulates present in the system are acceptable.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORM	NATION	method	limit/base	current	history1	history2
Sample Number		Client Info		TO10002556		
Sample Date		Client Info		31 Oct 2023		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	0		
Chromium	ppm	ASTM D5185m	>21	0		
Nickel	ppm	ASTM D5185m	>21	<1		
Titanium	ppm	ASTM D5185m	>21	0		
Silver	ppm	ASTM D5185m	>21	0		
Aluminum	ppm	ASTM D5185m	>21	0		
Lead	ppm	ASTM D5185m	>21	0		
Copper	ppm	ASTM D5185m	>21	0		
Tin	ppm	ASTM D5185m	>21	<1		
Vanadium	ppm	ASTM D5185m		3		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		0		
Magnesium	ppm	ASTM D5185m		0		
Calcium	ppm	ASTM D5185m		3		
Phosphorus	ppm	ASTM D5185m		1		
Zinc	ppm	ASTM D5185m		0		
Sulfur	ppm	ASTM D5185m	432	1357		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0		
Sodium	ppm	ASTM D5185m	>21	0		
Potassium	ppm	ASTM D5185m	>20	0		
Water	%	ASTM D6304	>0.0601	0.007		
ppm Water	ppm	ASTM D6304	>601	72.7		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		310414		
Particles >6µm		ASTM D7647	>10240000	250740		
Particles >14µm		ASTM D7647	>10240000	39942		
Particles >21µm		ASTM D7647	>2560000	3754		
Particles >38µm		ASTM D7647	>640000	34		
Particles >71µm		ASTM D7647	>160000	2		
Oil Cleanliness		ISO 4406 (c)	>/30/30	25/25/22		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.01	0.12		



OIL ANALYSIS REPORT

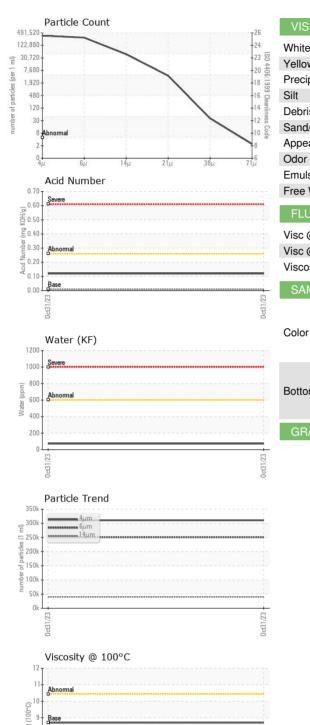

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>0.0601	NEG		
Free Water	scalar	*Visual		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	98.9	89.7		
Visc @ 100°C	cSt	ASTM D445	8.7	8.7		
Viscosity Index (VI)	Scale	ASTM D2270	35	54		
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image

GRAPHS

