

## **OIL ANALYSIS REPORT**

Sample Rating Trend

NORMAL

Are

# WARRIOR USED (748L ii) [A35889] 748 LII (1DW748LBTNF713003)

Rear Differential

Fluid

JOHN DEERE HY-GARD HYD/TRANS (8 GAL)





#### DIAGNOSIS

**Recommendation**Resample at the next service interval to monitor. (

Customer Sample Comment: A35889 )

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the


#### **Fluid Condition**


The condition of the oil is acceptable for the time in service.

AL)				Jul2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WE0007593		
Sample Date		Client Info		11 Jul 2024		
Machine Age	hrs	Client Info		3213		
Oil Age	hrs	Client Info		100		
Oil Changed		Client Info		Not Changd		
Sample Status				NORMAL		
CONTAMINATION	١	method	limit/base	current	history1	history2
Water		WC Method	>.2	NEG		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184		19		
Iron	ppm	ASTM D5185m	>500	13		
Chromium	ppm	ASTM D5185m	>10	<1		
Nickel	ppm	ASTM D5185m	>10	<1		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	2		
Lead	ppm	ASTM D5185m	>25	1		
Copper	ppm	ASTM D5185m	>100	15		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	6	3		
Barium	ppm	ASTM D5185m	0	2		
Molybdenum	ppm	ASTM D5185m	0	<1		
Manganese	ppm	ASTM D5185m		2		
Magnesium	ppm	ASTM D5185m	145	102		
Calcium	ppm	ASTM D5185m	3570	3481		
Phosphorus	ppm	ASTM D5185m	1290	1090		
Zinc	ppm	ASTM D5185m	1640	1244		
Sulfur	ppm	ASTM D5185m		3764		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	5		
Sodium	ppm	ASTM D5185m		2		
Potassium	ppm	ASTM D5185m	>20	4		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	NONE		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>.2	NEG		
Free Water	scalar	*Visual		NEG	Submitted By:	BOB <u>B</u> Y LUCKY



### **OIL ANALYSIS REPORT**

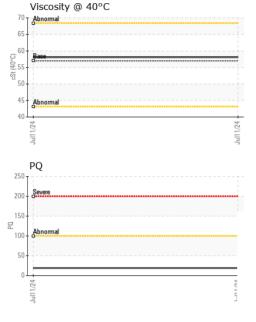

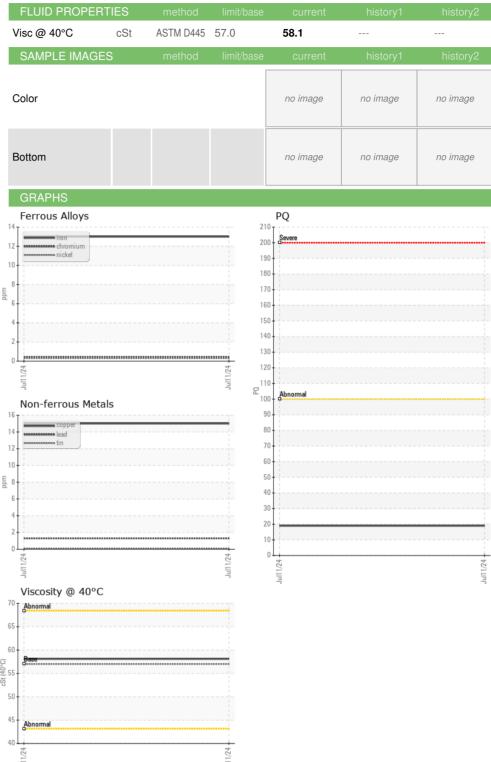



Laboratory Sample No.

: WE0007593 Lab Number : 06236441 Unique Number : 11125275

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested** 

: 15 Jul 2024 : 16 Jul 2024 Diagnosed : 17 Jul 2024 - Sean Felton

WARRIOR TRACTOR AND EQUIPMENT - HUNTSVILLE

25135 ONE AVIATION WAY SW MADISON, AL US 35756

Test Package : CONST ( Additional Tests: PQ ) Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: HERBERT STONE WTE013@WARRIORTRACTOR.COM T:

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: