



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Store 1 - Cowen [220134]
Machine Id
HITACHI ZX850LC3 FF01JDQ020113
Component
Left Propel Gearbox
Fluid
JOHN DEERE GL-5 80W90 (5 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LECP104108	---	---
Sample Date		Client Info		15 Apr 2011	---	---
Machine Age	hrs	Client Info		1477	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		99.0	---	---
Iron	ppm	ASTM D5185m		101	---	---
Chromium	ppm	ASTM D5185m		2	---	---
Nickel	ppm	ASTM D5185m		<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m		2	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		<1	---	---
Tin	ppm	ASTM D5185m		<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	MODER	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the component.

Silicon	ppm	ASTM D5185m		38	---	---
Potassium	ppm	ASTM D5185m		2	---	---
Water		WC Method		NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m		69	---	---
Barium	ppm	ASTM D5185m		12	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		7	---	---
Magnesium	ppm	ASTM D5185m		0	---	---
Calcium	ppm	ASTM D5185m		27	---	---
Phosphorus	ppm	ASTM D5185m		689	---	---
Zinc	ppm	ASTM D5185m		22	---	---
Sulfur	ppm	ASTM D5185m		12567	---	---
Visc @ 40°C	cSt	ASTM D445		182.9	---	---

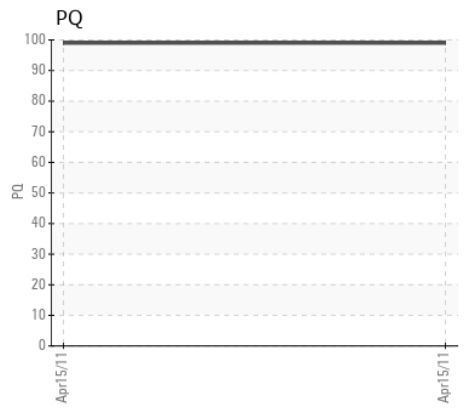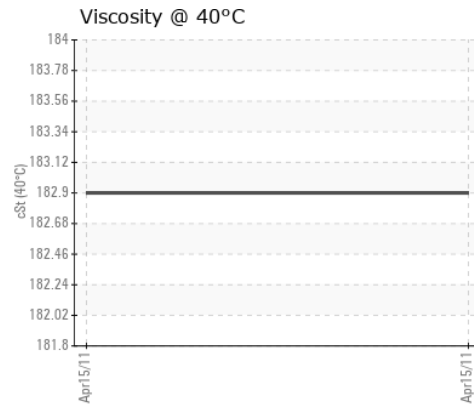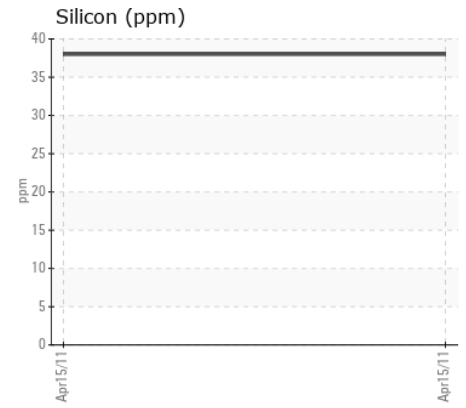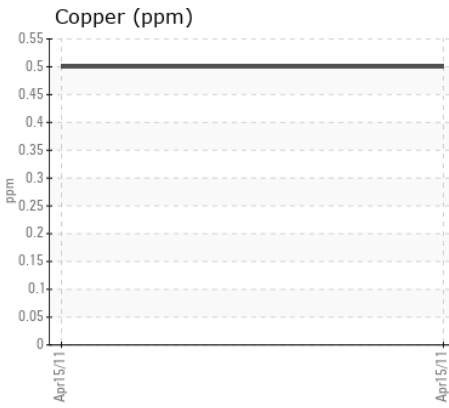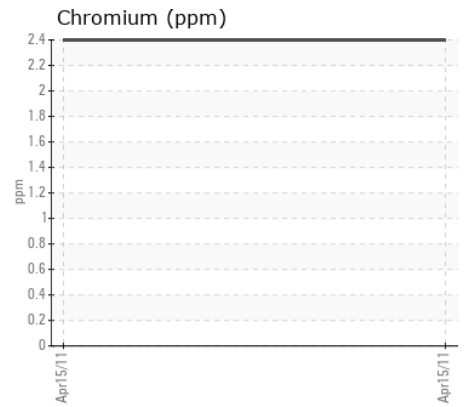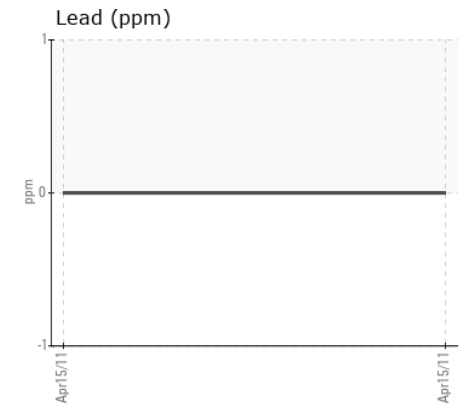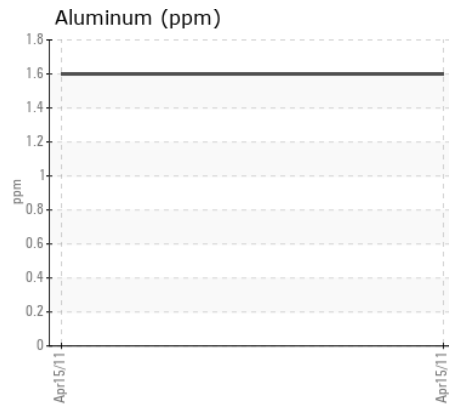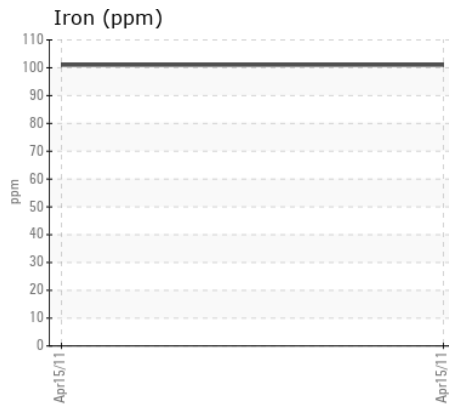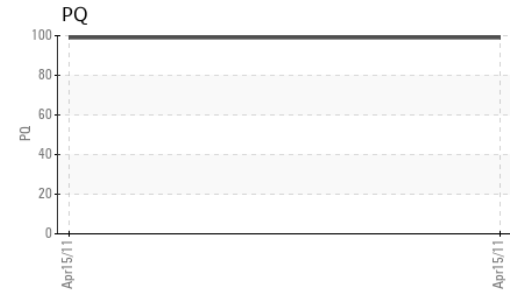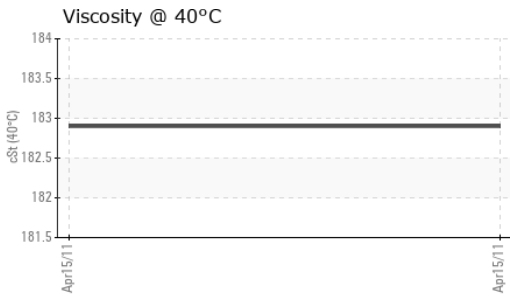

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC104108 **Received** : 18 Apr 2011
Lab Number : 02840624 **Diagnosed** : 19 Apr 2011
Unique Number : 5537097 **Diagnostician** : Elizabeth Valachovic
Test Package : MOB 1 (Additional Tests: Bottom, PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)