



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**P19841-019**

Component  
**Gearbox**

Fluid  
**CHEVRON MEROPA 220 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

## WEAR

All component wear rates are normal.









## CONTAMINATION

There is no indication of any contamination in the oil.

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>CB0031610</b>	CB0030867	CB0030861
Sample Date		Client Info		<b>28 Nov 2023</b>	06 Nov 2023	23 Aug 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL
PQ		ASTM D8184*		<b>0</b>	0	0
Iron	ppm	ASTM D5185(m)	>200	<b>6</b>	6	4
Chromium	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>25	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>100	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>200	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>25	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>50	<b>4</b>	3	3
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Boron	ppm	ASTM D5185(m)		<b>22</b>	23	27
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)		<b>2</b>	2	3
Calcium	ppm	ASTM D5185(m)		<b>11</b>	11	11
Phosphorus	ppm	ASTM D5185(m)		<b>231</b>	236	254
Zinc	ppm	ASTM D5185(m)		<b>4</b>	4	5
Sulfur	ppm	ASTM D5185(m)		<b>7210</b>	7088	7239
Acid Number (AN)	mg KOH/g	ASTM D974*		<b>0.70</b>	0.60	0.58
Visc @ 40°C	cSt	ASTM D7279(m)	209	<b>215</b>	215	215

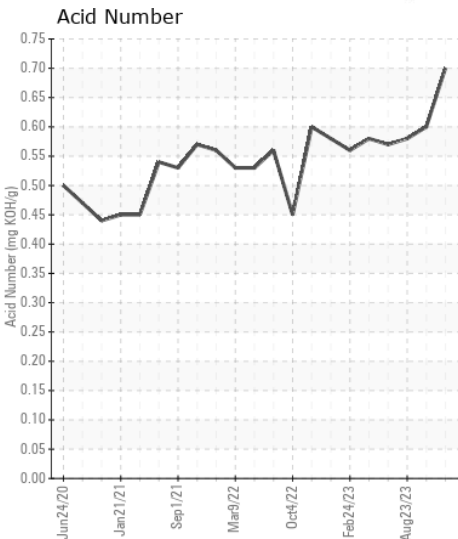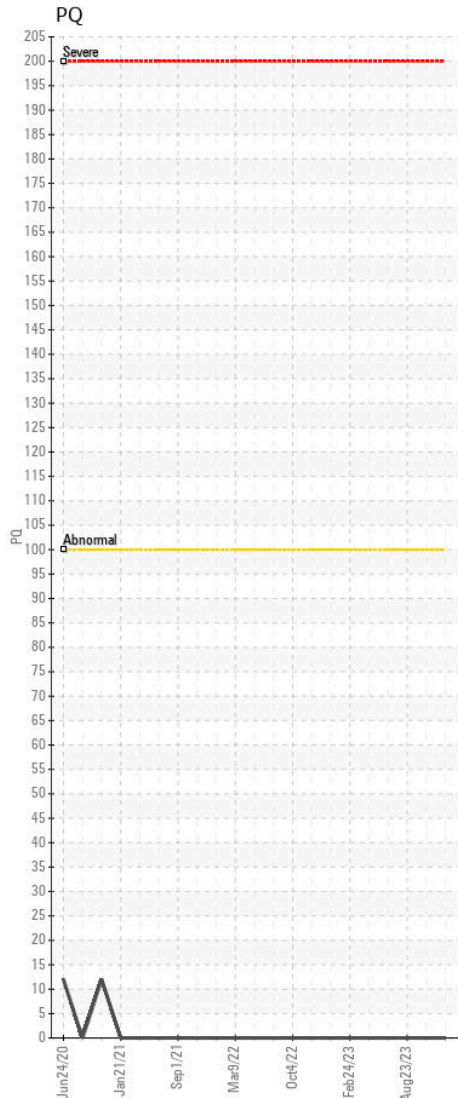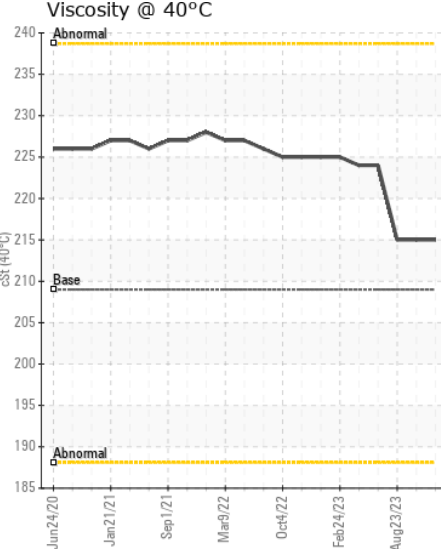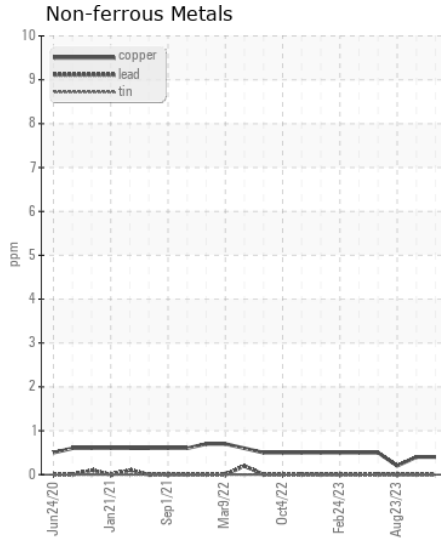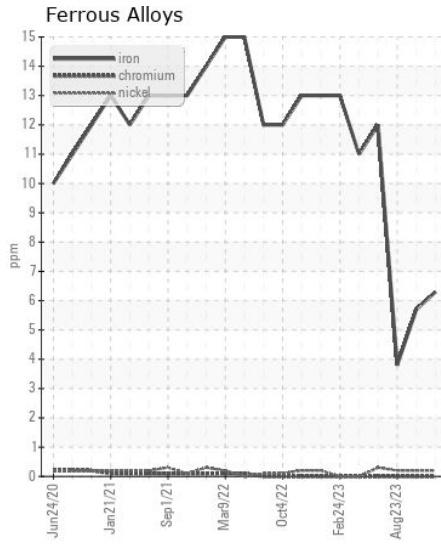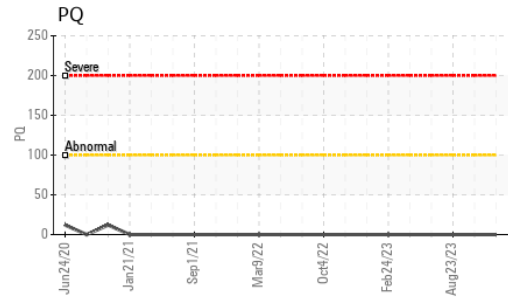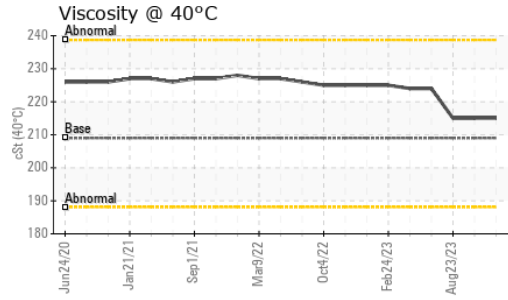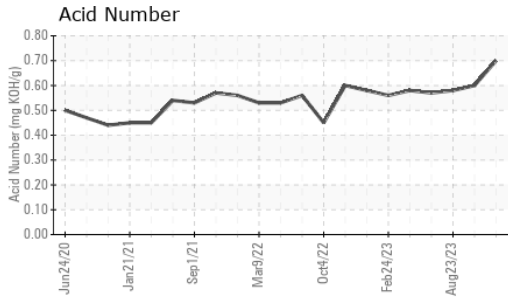

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : CB0031610 **Received** : 06 Dec 2023  
**Lab Number** : 02601330 **Diagnosed** : 06 Dec 2023  
**Unique Number** : 5694415 **Diagnostician** : Wes Davis  
**Test Package** : IND 2 ( Additional Tests: TAN Man )

**Pepsico Foods Canada**  
 34 Hunter S.W.  
 Peterborough, ON  
 CA K9J 7B2  
 Contact: Tom Mclean  
 tom.mclean@pepsico.com  
 T:  
 F: (705)876-4114

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.