



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
LOUVILLE [591655]

Machine Id
70776-1826

Component
Front Differential

Fluid
GEAR OIL SAE 80W90 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.
Please specify the component make and model with your next sample.

WEAR

All component wear rates are normal.










CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH	---	---
Sample Date		Client Info		04 Jan 2024	---	---
Machine Age	hrs	Client Info		1714	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185(m)	>500	62	---	---
Chromium	ppm	ASTM D5185(m)	>10	<1	---	---
Nickel	ppm	ASTM D5185(m)	>10	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	<1	---	---
Lead	ppm	ASTM D5185(m)	>25	2	---	---
Copper	ppm	ASTM D5185(m)	>100	68	---	---
Tin	ppm	ASTM D5185(m)	>10	1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>75	3	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>.2	NEG	---	---
Sodium	ppm	ASTM D5185(m)	>170	1	---	---
Boron	ppm	ASTM D5185(m)	400	<1	---	---
Barium	ppm	ASTM D5185(m)	200	0	---	---
Molybdenum	ppm	ASTM D5185(m)	12	0	---	---
Manganese	ppm	ASTM D5185(m)		3	---	---
Magnesium	ppm	ASTM D5185(m)	12	3	---	---
Calcium	ppm	ASTM D5185(m)	150	33	---	---
Phosphorus	ppm	ASTM D5185(m)	1650	2287	---	---
Zinc	ppm	ASTM D5185(m)	125	50	---	---
Sulfur	ppm	ASTM D5185(m)	22500	25440	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	143	180	---	---

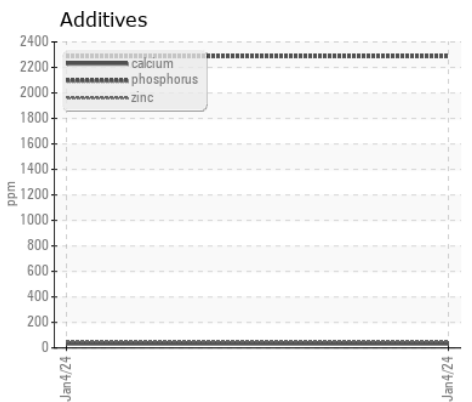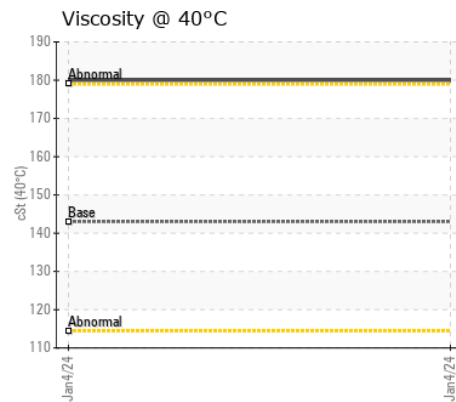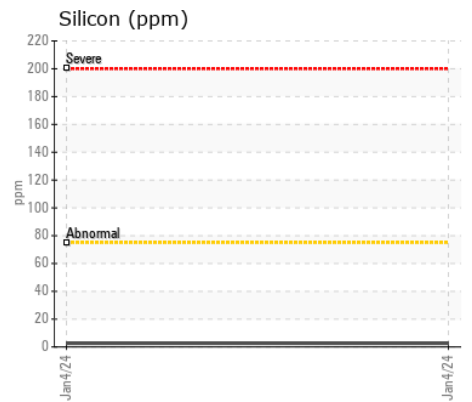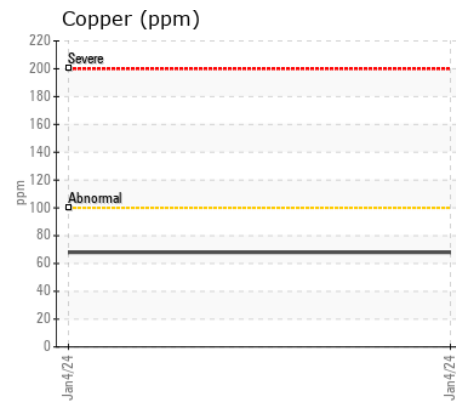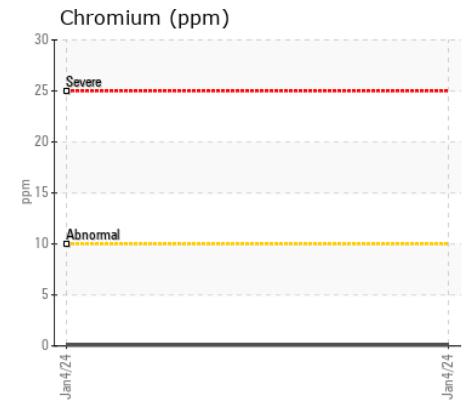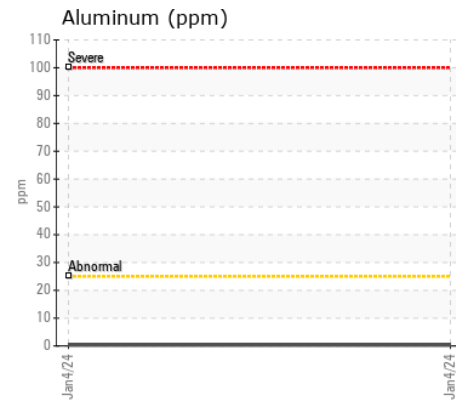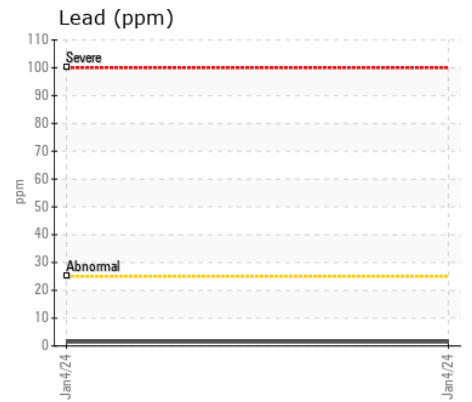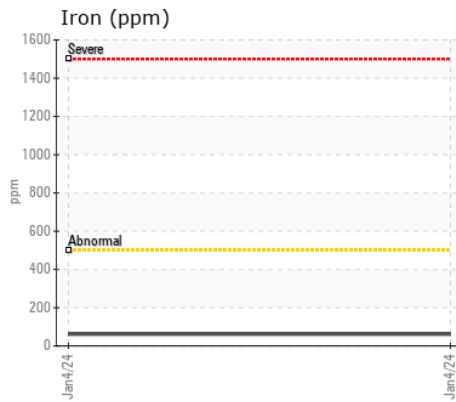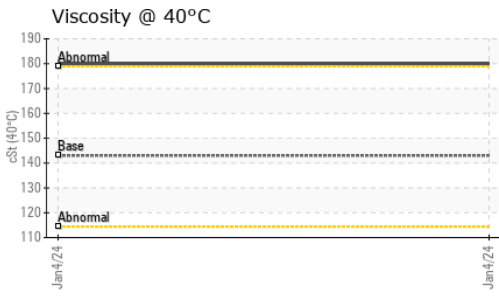

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH **Recieved** : 05 Jan 2024
Lab Number : 02606835 **Diagnosed** : 05 Jan 2024
Unique Number : 5707921 **Diagnostician** : Wes Davis
Test Package : MOB 1

LIEBHERR CANADA LTD.
 1015 SUTTON DRIVE
 BURLINGTON, ON
 CA L7L 5Z8
 Contact: Steve Lehto
 steve.lehto@liebherr.com
 T: (905)319-9222
 F: (905)319-6617

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.